


55M048D

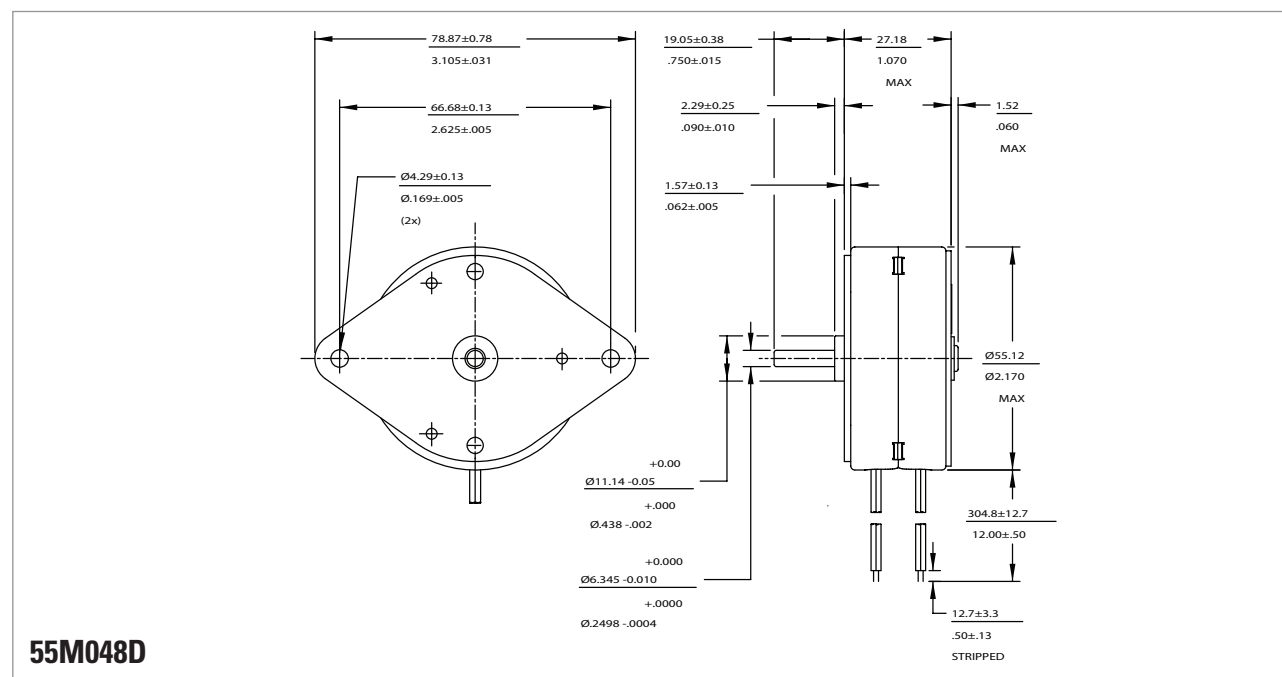

55M048D

Technical Specifications

Technical Specifications		Unipolar		Bipolar	
Part Number		55M048D1U	55M048D2U	55M048D1B	55M048D2B
Rated voltage	(vdc)	5	12	5	12
Resistance per phase ± 10%	(ohms)	5.20	30.00	5.20	30.00
Inductance per phase, Typ	(mH)	4.70	29.50	9.00	59.00
Rated current per phase *	(amps)	0.96	0.40	0.96	0.40
Holding torque, min *	(oz-in / mNm)	23.0 / 163		27.6 / 195	
Step angle *	(degrees)	7.5 ± 0.5°			
Steps per revolution *		48			
Detent torque, max	(oz-in / mNm)	5.5 / 39			
Thermal resistance	(°C / watt)	N.A.			
Rotor moment of inertia	(oz-in-s ² / g-cm ²)	0.264 / 48.3			
Ambient temperature range					
Operating	(°C)	-20 ~ +70			
Storage	(°C)	-40 ~ +85			
Bearing type		Sintered Bronze Sleeve			
Insulation resistance at 500vdc	(MΩ)	100			
Dielectric withstanding voltage	(vrms)	650 for 2 seconds			
Weight	(lbs / g)	0.53 / 238			
Shaft load ratings, max at 1500 rpm					
Radial	(lbs / kg)	2.25 / 1.02 (at shaft center)			
Axial	(lbs / kg)	1.13 / 0.51 (both directions)			
Leadwires		AWG 26, UL 1430			
Temperature class, max	(°C)	B(130°C)			
RoHS		Compliant			

All motor data values at 25°C unless otherwise specified

* Energise at rated current, 2 phase on

