


Low Value Flat Chip Resistor

LR Series

- Standard 2512, 2010 and 1206 sizes
- Resistance values down to 0.003 ohms
- Leach resistant solder-plated copper wrap-around termination
- AEC-Q200 Qualified
- RoHS compliant and SnPb variants

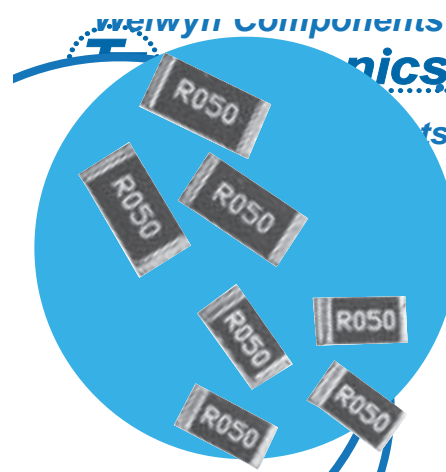

 All Pb-free parts comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

Electrical


		LR1206	LR2010	LR2512
Power rating at 70° C	watts	0.5	1.0	1.5/2.0*
Resistance range	ohms	0R010 to 1R	0R003 to 1R	0R003 to 1
Dielectric withstanding voltage	volts	200	200	200
TCR	ppm/° C	±100 (Contact factory for value below 0.050 ohms)		
Resistance tolerance	%	≤R005 5%, >R005 1, 2, 5%		
TCR	° C	40	80	90
Temperature rise at rated power	° C	40	80	90
Dielectric withstand	mm²	30	30	100
Pad and trace area for max power rating @ 70° C	mm²	30	30	100
Ambient temperature range	° C	-55 to +150		
Values		Let specified		
Temperature rise at rated power	° C	40	80	90
Pad / trace area³	mm²	30	100	300

Note 1: Contact factory available. Note 3: Recommended


Physical

Dimensions (mm)				
Size	L	W	H (max)	D
LR1206	3.20±0.305	1.63±0.20	0.8	0.48±0.25
LR2010	5.23±0.38	2.64±0.25	0.84	0.48±0.25
LR2512	6.50±0.38	3.25±0.25	0.84	0.48±0.25

Dimensions (mm)	LR(F)1206	LR(F)2010	LR(F)2512
Size	3.20±0.305	5.23±0.38	6.50±0.38
	1.63±0.20	2.64±0.25	3.25±0.25
	0.8	0.84	0.84
	0.48±0.25	0.48±0.25	0.48±0.25

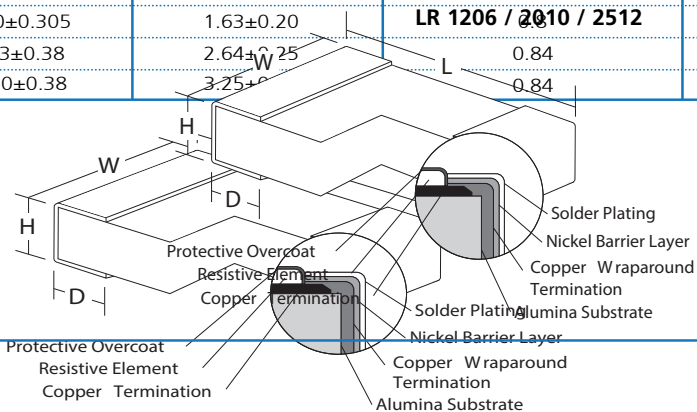

Recommended Solder Pad Dimensions (mm)			
	A	B	C
LR(F)1206	2.0	4.0	1.25
LR(F)2010	3.5	6.5	1.5
LR(F)2512	4.75	7.75	1.5



General Note
Welwyn Components reserves the right to make changes in product specification without notice or liability. All information is subject to Welwyn's own data and is considered accurate at time of going to print.

© Welwyn Components Limited, Bedlington, Northumberland NE22 7AA, UK
Telephone: +44 (0) 1670 822181 · Facsimile: +44 (0) 1670 829465 · Email: info@welwyn-tt.com · Website: www.welwyn-tt.com

Web
A subsidiary of TT electronics

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

BI Technologies IRC Welwyn

www.ttelectronics.com/resistors

Performance Data

AEC-Q200 Table 7		Method	Max. (add R05)	Typ. (@1R0)
ref	Test			
3	High Temp. Exposure	MIL-STD-202 Method 108	$\Delta R\%$ 0.5	0.2
4	Temperature Cycling	JESD22 Method JA-104	$\Delta R\%$ 0.25	0.1
6	Moisture Resistance	MIL-STD-202 Method 106	$\Delta R\%$ 0.5	0.2
7	Biased Humidity	MIL-STD-202 Method 103	$\Delta R\%$ 0.5	0.2
8	Operational Life (Cyclic Load)	MIL-STD-202 Method 108	$\Delta R\%$ 1	0.5
14	Vibration	MIL-STD-202 Method 204	$\Delta R\%$ 0.5	0.05
15	Resistance to Soldering Heat	MIL-STD-202 Method 210	$\Delta R\%$ 0.25	0.05
16	Thermal Shock	MIL-STD-202 Method 107	$\Delta R\%$ 0.25	0.1
18	Solderability	J-STD-002	>95% coverage	
21	Board Flex	AEC-Q200-005	$\Delta R\%$ 0.5	0.2
22	Terminal Strength	AEC-Q200-006	$\Delta R\%$ 0.25	0.1
Short Term Overload		6.25 x Pr for 2s	$\Delta R\%$ 0.5	
Low Temperature Storage		-65°C for 100 hours	$\Delta R\%$ 0.5	
Leach Resistance		Solder dip at 250°C	90s minimum	

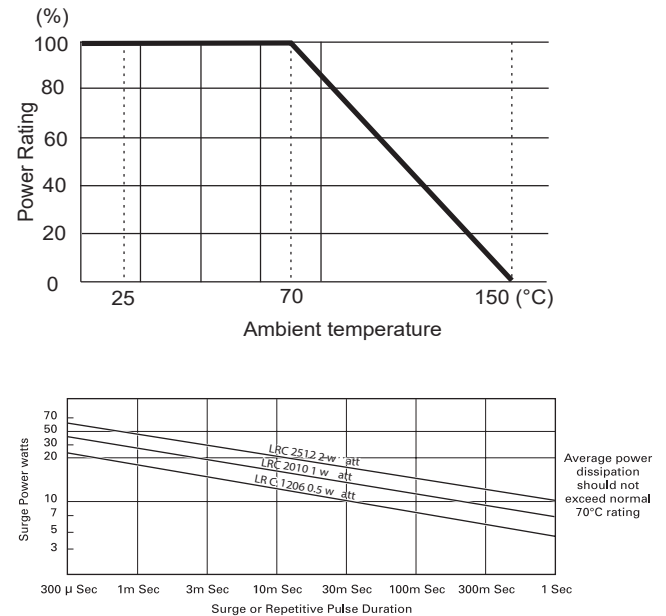

Note:

1. Although 2010 and 2512 sizes have passed temperature cycling and thermal shock, it is in general not recommended that ceramic chips this large be used on FR4 in a severe temperature cycle environment due to the possibility of solder joint fatigue.

Full AEC-Q200 qualification applies only to ohmic values $\geq R01$.

Ordering Procedure

This product has two valid part numbers:

European (Welwyn) Part Number: LRF1206-R02FW (1206, 20 milliohms $\pm 1\%$, Pb-free)

L	R	F	1	2	0	6	-	R	0	2	F	W
1		2		3		4		5				

1 Type	2 Size	3 Value	4 Tolerance	5 Termination & Packing
LR = Conventional orientation (values $\geq R025$)	1206 2010	E24 = 3/4 characters R = ohms	F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$	W Pb-free, standard packing T1 Pb-free, 1000/reel (non-standard) PB SnPb finish, standard packing
LRF = Flip-chip orientation (values $\leq R025$)	2512			Standard packing is tape & reel 1206 & 2010 3000/reel 2512 1800/reel

USA (IRC) Part Number: LRC-LRF1206LF-01-R020-F (1206, 20 milliohms $\pm 1\%$, Pb-free)

L	R	C	-	L	R	F	1	2	0	6	L	F	-	0	1	-	R	0	2	0	-	F
1			2			3			4			5			6			7				

1 Family	2 Model	3 Size	4 Termination	5 TCR	6 Value	7 Tolerance	Packing		
LRC	LR = Conventional orientation (values $\geq R025$)	1206 2010	Omit for SnPb LF = Pb-free	01 = standard ($\pm 100\text{ppm}/^\circ\text{C}$ values $\geq R05$)	4 characters R = ohms	F = $\pm 1\%$ G = $\pm 2\%$ J = $\pm 5\%$	Standard packing is tape & reel Pb-free SnPb	All sizes 1206 & 2010 2512	1000/reel 3000/reel 1800/reel

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.