

# TLV243x-Q1 Advanced LinCMOS™ Rail-to-Rail Output Wide-Input-Voltage Operational Amplifiers

## 1 Features

- Qualified for automotive applications
- ESD protection exceeds 2000V per MIL-STD-883, method 3015; exceeds 200V using machine model (C = 200pF, R = 0)
- Output swing includes both supply rails
- Extended common-mode input voltage range: 0V to 4.5V (minimum) at 5V single supply
- No phase inversion
- Low noise:  $18\text{nV}/\sqrt{\text{Hz}}$  (typical) at  $f = 1\text{kHz}$
- Low input offset voltage:  $950\mu\text{V}$  (maximum) at  $T_A = 25^\circ\text{C}$  (TLV243xA-Q1)
- Low input bias current:  $1\text{pA}$  (typical)
- Very low supply current:  $125\mu\text{A}$  per channel (maximum)
- $600\Omega$  output drive
- Macromodel included

## 2 Applications

- [Battery management unit](#)
- [ADAS domain controller](#)
- [Brake system](#)

## 3 Description

The TLV243x and TLV243xA are low-voltage operational amplifier from Texas Instruments. The common-mode input voltage range for each device is extended over the typical CMOS amplifiers making them suitable for a wide range of applications. In addition, these devices do not phase invert when the common-mode input is driven to the supply rails. This satisfies most design requirements without paying a premium for rail-to-rail input performance. They also exhibit rail-to-rail output performance for increased dynamic range in single- or split-supply applications. This family is fully characterized at 3V and 5V supplies and is optimized for low-voltage operation. The TLV243x only requires  $100\mu\text{A}$  (typical) of supply current per channel, making it ideal for battery-powered applications. The TLV243x also has increased output drive over previous rail-to-rail operational amplifiers and can drive  $600\Omega$  loads for telecom applications.

The other members in the TLV243x family are the high-power, TLV244x, and micro-power, TLV2422, versions.

The TLV243x, exhibiting high input impedance and low noise, is excellent for small-signal conditioning

for high-impedance sources, such as piezoelectric transducers. Because of the micropower dissipation levels and low-voltage operation, these devices work well in hand-held monitoring and remote-sensing applications. In addition, the rail-to-rail output feature with single- or split-supplies makes this family a great choice when interfacing with analog-to-digital converters (ADCs). For precision applications, the TLV243xA is available and has a maximum input offset voltage of  $950\mu\text{V}$ .

If the design requires single operational amplifiers, see the TI TLV2211, TLV2221, or TLV2231 for rail-to-rail output operational amplifiers in a SOT-23 package. The small size and low power consumption of the TLV22xx devices are designed for high density, battery-powered equipment.


### Package Information

| PART NUMBER             | PACKAGE <sup>(1)</sup> | PACKAGE SIZE <sup>(2)</sup> |
|-------------------------|------------------------|-----------------------------|
| TLV2432-Q1, TLV2432A-Q1 | D (SOIC, 8)            | 4.9mm × 6mm                 |
| TLV2434A-Q1             | D (SOIC, 8)            | 4.9mm × 6mm                 |
|                         | PW (TSSOP, 14)         | 5mm × 6.4mm                 |

(1) For more information, see [Section 9](#).

(2) The package size (length × width) is a nominal value and includes pins, where applicable.





### HIGH-LEVEL OUTPUT VOLTAGE vs HIGH-LEVEL OUTPUT CURRENT

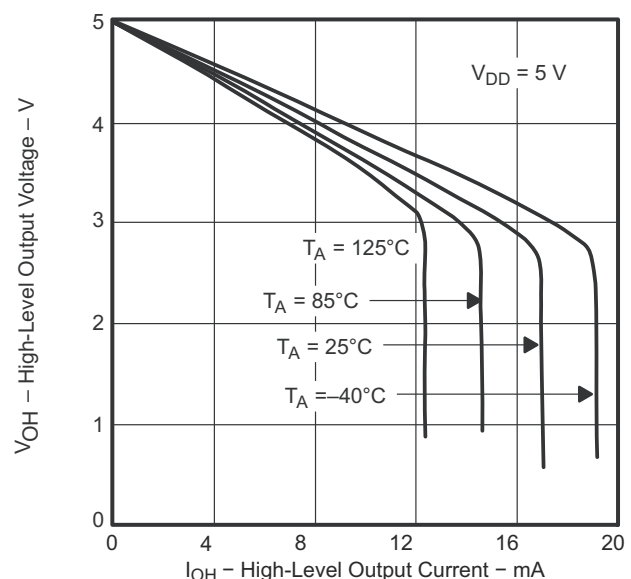

## 4 Ordering Information

| T <sub>A</sub> | V <sub>IO</sub> max<br>AT 25°C | PACKAGE <sup>(2)</sup> |               | ORDERABLE PART<br>NUMBER <sup>(1)</sup> | TOP-SIDE MARKING |
|----------------|--------------------------------|------------------------|---------------|-----------------------------------------|------------------|
| –40°C to 125°C | 950 µV                         | SOIC – D               | Tape and reel | TLV2432AQDRQ1                           | 2432AQ           |
|                |                                | TSSOP – PW             | Tape and reel | TLV2432AQPWRQ1                          | PREVIEW          |
|                | 2.5 mV                         | SOIC – D               | Tape and reel | TLV2432QDRQ1                            | 2432Q1           |
|                |                                | TSSOP – PW             | Tape and reel | TLV2432QPWRQ1                           | PREVIEW          |
|                | 950 µV                         | SOIC – D               | Tape and reel | TLV2434AQDRQ1                           | 2434AQ           |
|                |                                | TSSOP – PW             | Tape and reel | TLV2434AQPWRQ1                          | 2434AQ           |

- (1) For the most current package and ordering information, see the Package Option Addendum at the end of this document, or see the TI web site at [www.ti.com](http://www.ti.com).
- (2) Package drawings, thermal data, and symbolization are available at [www.ti.com/packaging](http://www.ti.com/packaging).

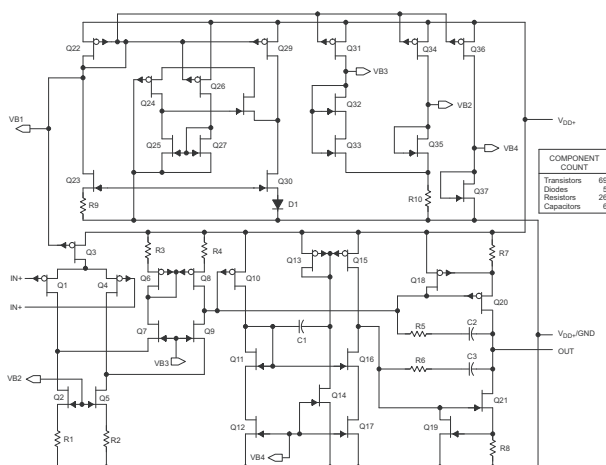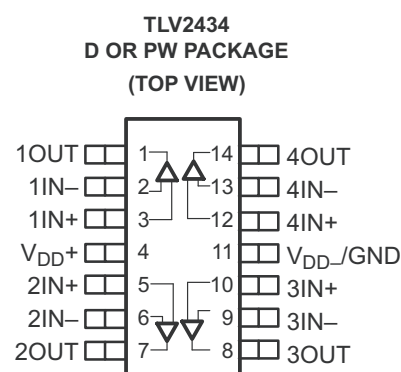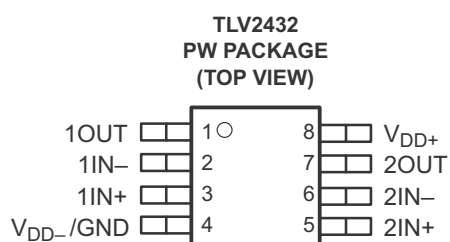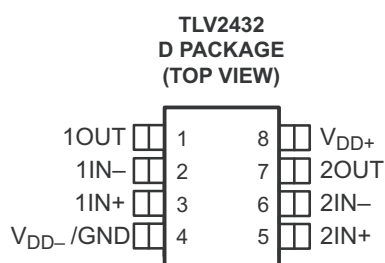

**Equivalent Schematic (Each Amplifier)**

## 5 Specifications

### 5.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) <sup>(1)</sup>

|                  |                                                                     | MIN                          | MAX              | UNIT |
|------------------|---------------------------------------------------------------------|------------------------------|------------------|------|
| V <sub>DD</sub>  | Supply voltage <sup>(2)</sup>                                       |                              | 12               | V    |
| V <sub>ID</sub>  | Differential input voltage <sup>(3)</sup>                           |                              | ±V <sub>DD</sub> |      |
| I <sub>I</sub>   | Input current (any input)                                           |                              | ±5               | mA   |
| I <sub>O</sub>   | Output current                                                      |                              | ±50              | mA   |
|                  | Total current into V <sub>DD+</sub>                                 |                              | ±50              | mA   |
|                  | Total current out of V <sub>DD-</sub>                               |                              | ±50              | mA   |
|                  | Duration of short-circuit current at (or below) 25°C <sup>(4)</sup> | Unlimited                    |                  |      |
|                  | Continuous total dissipation                                        | See Dissipation Rating Table |                  |      |
| T <sub>A</sub>   | Operating free-air temperature range: Q suffix                      | –40                          | 125°C            |      |
| T <sub>stg</sub> | Storage temperature range                                           | –65                          | 150°C            |      |
|                  | Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds        |                              | 260°C            | °C   |

- (1) Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) All voltage values, except differential voltages, are with respect to the midpoint between V<sub>DD+</sub> and V<sub>DD-</sub>.
- (3) Differential voltages are at IN+ with respect to IN–. Excessive current will flow if input is brought below V<sub>DD-</sub> – 0.3 V.
- (4) The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

### 5.2 Dissipation Ratings

| PACKAGE | T <sub>A</sub> ≤ 25°C<br>POWER RATING | DERATING FACTOR<br>ABOVE T <sub>A</sub> = 25°C | T <sub>A</sub> = 70°C<br>POWER RATING | T <sub>A</sub> = 85°C<br>POWER RATING | T <sub>A</sub> = 125°C<br>POWER RATING |
|---------|---------------------------------------|------------------------------------------------|---------------------------------------|---------------------------------------|----------------------------------------|
| D (8)   | 725 mW                                | 5.8 mW/°C                                      | 464 mW                                | 377 mW                                | 145 mW                                 |
| D (14)  | 1022 mW                               | 7.6 mW/°C                                      | 900 mW                                | 777 mW                                | 450 mW                                 |
| PW (8)  | 525 mW                                | 4.2 mW/°C                                      | 336 mW                                | 273 mW                                | 105 mW                                 |
| PW (14) | 720 mW                                | 5.6 mW/°C                                      | 634 mW                                | 547 mW                                | 317 mW                                 |

### 5.3 Recommended Operating Conditions

|                 |                                | MIN              | MAX                    | UNIT |
|-----------------|--------------------------------|------------------|------------------------|------|
| V <sub>DD</sub> | Supply voltage                 | 2.7              | 10                     | V    |
| V <sub>I</sub>  | Input voltage                  | V <sub>DD-</sub> | V <sub>DD+</sub> – 0.8 | V    |
| V <sub>IC</sub> | Common-mode input voltage      | V <sub>DD-</sub> | V <sub>DD+</sub> – 0.5 | V    |
| T <sub>A</sub>  | Operating free-air temperature | –40              | 125                    | °C   |

## 5.4 Electrical Characteristics: $V_{DD} = 3\text{ V}$

at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)

| PARAMETER        |                                                                       | TEST CONDITIONS                                                                                    |                                                     | T <sub>A</sub> <sup>(1)</sup> | MIN        | TYP           | MAX  | UNIT  |
|------------------|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|-----------------------------------------------------|-------------------------------|------------|---------------|------|-------|
| V <sub>IO</sub>  | Input offset voltage                                                  | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br>V <sub>DD±</sub> = ±1.5 V,<br>R <sub>S</sub> = 50 Ω | TLV243x                                             | 25°C                          |            | 300           | 2000 | μV    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 2500          |      |       |
|                  |                                                                       |                                                                                                    | TLV243xA                                            | 25°C                          |            | 300           | 950  |       |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 1600          |      |       |
| α <sub>VIO</sub> | Temperature coefficient of input offset voltage                       | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,                                                        | V <sub>DD±</sub> = ±1.5 V,<br>R <sub>S</sub> = 50 Ω | 25°C to 70°C                  |            | 2             |      | μV/°C |
|                  | Input offset voltage long-term drift <sup>(3)</sup>                   |                                                                                                    |                                                     | 25°C                          |            | 0.003         |      | μV/mo |
| I <sub>IO</sub>  | Input offset current                                                  |                                                                                                    |                                                     | 25°C                          |            | 0.5           |      | pA    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 150           |      |       |
| I <sub>IB</sub>  | Input bias current                                                    |                                                                                                    |                                                     | 25°C                          |            | 1             |      | pA    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 300           |      |       |
| V <sub>ICR</sub> | Common-mode input voltage range                                       | V <sub>IO</sub>   ≤ 5 mV,                                                                          | R <sub>S</sub> = 50 Ω                               | 25°C                          | 0 to 2.5   | -0.25 to 2.75 |      | V     |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    | 0.2 to 2.2 |               |      |       |
| V <sub>OH</sub>  | High-level output voltage                                             | I <sub>O</sub> = −100 μA                                                                           |                                                     | 25°C                          |            | 2.98          |      | V     |
|                  |                                                                       | I <sub>O</sub> = −3 mA                                                                             |                                                     | 25°C                          |            | 2.5           |      |       |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 2.25          |      |       |
| V <sub>OL</sub>  | Low-level output voltage                                              | V <sub>IC</sub> = 1.5 V                                                                            | I <sub>OL</sub> = 100 μA                            | 25°C                          |            | 0.02          |      | V     |
|                  |                                                                       |                                                                                                    | I <sub>OL</sub> = 3 mA                              | 25°C                          |            | 0.83          |      |       |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 1             |      |       |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                       | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 2 V                                            | R <sub>L</sub> = 2 kΩ <sup>(2)</sup>                | 25°C                          | 1.5        | 2.5           |      | V/mV  |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    | 0.5        |               |      |       |
|                  |                                                                       |                                                                                                    | R <sub>L</sub> = 1 MΩ <sup>(2)</sup>                | 25°C                          |            | 750           |      |       |
| r <sub>id</sub>  | Differential input resistance                                         |                                                                                                    |                                                     | 25°C                          |            | 1000          |      | GΩ    |
| r <sub>i</sub>   | Common-mode input resistance                                          |                                                                                                    |                                                     | 25°C                          |            | 1000          |      | GΩ    |
| c <sub>i</sub>   | Common-mode input capacitance                                         | f = 10 kHz                                                                                         |                                                     | 25°C                          |            | 8             |      | pF    |
| z <sub>o</sub>   | Closed-loop output impedance                                          | f = 100 kHz,                                                                                       | A <sub>V</sub> = 10                                 | 25°C                          |            | 130           |      | Ω     |
| CMRR             | Common-mode rejection ratio                                           | V <sub>IC</sub> = V <sub>ICR</sub> MIN,<br>R <sub>S</sub> = 50 Ω                                   | V <sub>O</sub> = 1.5 V,                             | 25°C                          | 63         | 83            |      | dB    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    | 63         |               |      |       |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD±</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 8 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,                           | No load                                             | 25°C                          | 80         | 95            |      | dB    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    | 80         |               |      |       |
| I <sub>DD</sub>  | Supply current (per channel)                                          | V <sub>O</sub> = 1.5 V, No load                                                                    |                                                     | 25°C                          |            | 115           | 150  | μA    |
|                  |                                                                       |                                                                                                    |                                                     | Full range                    |            | 175           |      |       |

(1) Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

(2) Referenced to  $2.5\text{ V}$ .

(3) Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of  $0.96\text{ eV}$ .

## 5.5 Operating Characteristics: $V_{DD} = 3\text{ V}$

at specified free-air temperature,  $V_{DD} = 3\text{ V}$  (unless otherwise noted)

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                                    |                     | T <sub>A</sub> <sup>(1)</sup> | MIN  | TYP   | MAX | UNIT    |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------|------|-------|-----|---------|
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = 1 V to 2 V, R <sub>L</sub> = 2 kΩ <sup>(2)</sup> ,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup>                      |                     | 25°C                          | 0.15 | 0.25  |     | V/μs    |
|                    |                                             |                                                                                                                                    |                     | Full range                    | 0.1  |       |     |         |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                                                          |                     | 25°C                          |      | 120   |     | nV/√ Hz |
|                    |                                             | f = 1 kHz                                                                                                                          |                     |                               |      | 22    |     |         |
| V <sub>n(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                                 |                     | 25°C                          |      | 2.7   |     | μV      |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                                                |                     |                               |      | 4     |     |         |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                                                    |                     | 25°C                          |      | 0.6   |     | fA/√ Hz |
| THD+N              | Total harmonic distortion plus noise        | V <sub>O</sub> = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 2 kΩ <sup>(2)</sup> , f = 1 kHz                                               | A <sub>V</sub> = 1  | 25°C                          |      | 0.65% |     |         |
|                    |                                             |                                                                                                                                    | A <sub>V</sub> = 10 |                               |      | 0.5%  |     |         |
|                    | Gain-bandwidth product                      | f = 10 kHz, R <sub>L</sub> = 2 kΩ, C <sub>L</sub> = 100 pF <sup>(2)</sup>                                                          |                     | 25°C                          |      | 0.5   |     | MHz     |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 1 V, R <sub>L</sub> = 2 kΩ, A <sub>V</sub> = 1,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup>                     |                     | 25°C                          |      | 220   |     | kHz     |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.5 V to 2.5 V,<br>R <sub>L</sub> = 2 kΩ <sup>(2)</sup> ,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup> | To 0.1%             | 25°C                          |      | 1.5   |     | μs      |
|                    |                                             |                                                                                                                                    | To 0.01%            |                               |      | 3.2   |     |         |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2kΩ <sup>(2)</sup> , C <sub>L</sub> = 100 pF <sup>(2)</sup>                                                       |                     | 25°C                          |      | 62°   |     |         |
|                    | Gain margin                                 | R <sub>L</sub> = 2kΩ <sup>(2)</sup> , C <sub>L</sub> = 100 pF <sup>(2)</sup>                                                       |                     | 25°C                          |      | 11    |     | dB      |

(1) Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

(2) Referenced to  $2.5\text{ V}$

## 5.6 Electrical Characteristics: $V_{DD} = 5\text{ V}$

$V_{DD} = 5\text{ V}$ , at specified free-air temperature (unless otherwise noted)

| PARAMETER        |                                                                      | TEST CONDITIONS                                                                                        |                                      | T <sub>A</sub> <sup>(1)</sup> | MIN      | TYP           | MAX  | UNIT  |
|------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------|----------|---------------|------|-------|
| V <sub>IO</sub>  | Input offset voltage                                                 | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br>V <sub>DD±</sub> = ±2.5 V,<br>R <sub>S</sub> = 50 Ω     | TLV243x                              | 25°C                          |          | 300           | 2000 | μV    |
|                  |                                                                      |                                                                                                        |                                      | Full range                    |          |               | 2500 |       |
|                  |                                                                      |                                                                                                        | TLV243xA                             | 25°C                          |          | 300           | 950  |       |
|                  |                                                                      |                                                                                                        |                                      | Full range                    |          |               | 2000 |       |
| α <sub>VIO</sub> | Temperature coefficient of input offset voltage                      | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br><br>V <sub>DD±</sub> = ±1.5 V,<br>R <sub>S</sub> = 50 Ω | 25°C to 70°C                         |                               |          | 2             |      | μV/°C |
|                  | Input offset voltage long-term drift <sup>(3)</sup>                  |                                                                                                        | 25°C                                 |                               |          | 0.003         |      | μV/mo |
| I <sub>IO</sub>  | Input offset current                                                 |                                                                                                        | 25°C                                 |                               |          | 0.5           |      | pA    |
|                  |                                                                      |                                                                                                        | Full range                           |                               |          | 150           |      |       |
| I <sub>IB</sub>  | Input bias current                                                   |                                                                                                        | 25°C                                 |                               |          | 1             |      | pA    |
|                  |                                                                      |                                                                                                        | Full range                           |                               |          | 300           |      |       |
| V <sub>ICR</sub> | Common-mode input voltage range                                      | V <sub>IO</sub>   ≤ 5 mV, R <sub>S</sub> = 50 Ω                                                        |                                      | 25°C                          | 0 to 4.5 | −0.25 to 4.75 |      | V     |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 0 to 4.2 |               |      |       |
| V <sub>OH</sub>  | High-level output voltage                                            | I <sub>OH</sub> = −100 μA                                                                              |                                      | 25°C                          |          | 4.97          |      | V     |
|                  |                                                                      | I <sub>OH</sub> = −5 mA                                                                                |                                      | 25°C                          | 4        | 4.35          |      |       |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 4        |               |      |       |
| V <sub>OL</sub>  | Low-level output voltage                                             | V <sub>IC</sub> = 2.5 V                                                                                | I <sub>OL</sub> = 100 μA             | 25°C                          |          | 0.01          |      | V     |
|                  |                                                                      |                                                                                                        | I <sub>OL</sub> = 5 mA               | 25°C                          |          | 0.8           |      |       |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 1.25     |               |      |       |
| A <sub>VD</sub>  | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 4 V                                                | R <sub>L</sub> = 2 kΩ <sup>(2)</sup> | 25°C                          | 2.5      | 3.8           |      | V/mV  |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 0.5      |               |      |       |
|                  |                                                                      |                                                                                                        | R <sub>L</sub> = 1 MΩ <sup>(2)</sup> | 25°C                          |          | 950           |      |       |
| r <sub>id</sub>  | Differential input resistance                                        |                                                                                                        |                                      | 25°C                          |          | 1000          |      | GΩ    |
| r <sub>i</sub>   | Common-mode input resistance                                         |                                                                                                        |                                      | 25°C                          |          | 1000          |      | GΩ    |
| c <sub>i</sub>   | Common-mode input capacitance                                        | f = 10 MHz                                                                                             |                                      | 25°C                          |          | 8             |      | pF    |
| z <sub>o</sub>   | Closed-loop output impedance                                         | f = 100 kHz, A <sub>V</sub> = 10                                                                       |                                      | 25°C                          |          | 130           |      | Ω     |
| CMRR             | Common-mode rejection ratio                                          | V <sub>IC</sub> = V <sub>ICR</sub> MIN, V <sub>O</sub> = 2.5 V, R <sub>S</sub> = 50 Ω                  |                                      | 25°C                          | 63       | 90            |      | dB    |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 63       |               |      |       |
| k <sub>SVR</sub> | Supply-voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 4.4 V to 8 V, V <sub>IC</sub> = V <sub>DD</sub> /2, No load                          |                                      | 25°C                          | 80       | 95            |      | dB    |
|                  |                                                                      |                                                                                                        |                                      | Full range                    | 80       |               |      |       |
| I <sub>DD</sub>  | Supply current (per channel)                                         | V <sub>O</sub> = 2.5 V, No load                                                                        |                                      | 25°C                          |          | 115           | 150  | μA    |
|                  |                                                                      |                                                                                                        |                                      | Full range                    |          | 175           |      |       |

(1) Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

(2) Referenced to  $2.5\text{ V}$

(3) Typical values are based on the input offset voltage shift observed through 168 hours of operating life test at  $T_A = 150^\circ\text{C}$  extrapolated to  $T_A = 25^\circ\text{C}$  using the Arrhenius equation and assuming an activation energy of  $0.96\text{ eV}$ .

## 5.7 Operating Characteristics: $V_{DD} = 5\text{ V}$

$V_{DD} = 5\text{ V}$ , at specified free-air temperature (unless otherwise noted)

| PARAMETER          |                                             | TEST CONDITIONS                                                                                                                    |                     | T <sub>A</sub> <sup>(1)</sup> | MIN    | TYP  | MAX | UNIT    |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------|--------|------|-----|---------|
| SR                 | Slew rate at unity gain                     | V <sub>O</sub> = 1.5 V to 3.5 V, R <sub>L</sub> = 2 kΩ <sup>(2)</sup> ,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup>                  |                     | 25°C                          | 0.15   | 0.25 |     | V/μs    |
|                    |                                             |                                                                                                                                    |                     | Full range                    | 0.1    |      |     |         |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 10 Hz                                                                                                                          |                     | 25°C                          | 100    |      |     | nV/√ Hz |
|                    |                                             | f = 1 kHz                                                                                                                          |                     |                               | 18     |      |     |         |
| V <sub>n(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                                                 |                     | 25°C                          | 1.9    |      |     | μV      |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                                                                |                     |                               | 2.8    |      |     |         |
| I <sub>n</sub>     | Equivalent input noise current              |                                                                                                                                    |                     | 25°C                          | 0.6    |      |     | fA/√ Hz |
| THD+N              | Total harmonic distortion plus noise        | V <sub>O</sub> = 1.5 V to 3.5V,<br>f = 1 kHz, R <sub>L</sub> = 600 Ω <sup>(2)</sup>                                                | A <sub>V</sub> = 1  | 25°C                          | 0.045% |      |     |         |
|                    |                                             |                                                                                                                                    | A <sub>V</sub> = 10 |                               | 0.4%   |      |     |         |
|                    | Gain-bandwidth product                      | f = 10 kHz, R <sub>L</sub> = 600 Ω <sup>(2)</sup> , C <sub>L</sub> = 100 pF <sup>(2)</sup>                                         |                     | 25°C                          | 0.55   |      |     | MHz     |
| B <sub>OM</sub>    | Maximum output-swing bandwidth              | V <sub>O(PP)</sub> = 2 V, A <sub>V</sub> = 1, R <sub>L</sub> = 2 kΩ <sup>(2)</sup> ,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup>     |                     | 25°C                          | 100    |      |     | kHz     |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1,<br>Step = 1.5 V to 3.5 V,<br>R <sub>L</sub> = 2 kΩ <sup>(2)</sup> ,<br>C <sub>L</sub> = 100 pF <sup>(2)</sup> | To 0.1%             | 25°C                          | 6.4    |      |     | μs      |
|                    |                                             |                                                                                                                                    | To 0.01%            |                               | 13.1   |      |     |         |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 2 kΩ <sup>(2)</sup> , C <sub>L</sub> = 100 pF <sup>(2)</sup>                                                      |                     | 25°C                          | 66°    |      |     |         |
|                    | Gain margin                                 | R <sub>L</sub> = 2 kΩ <sup>(2)</sup> , C <sub>L</sub> = 100 pF <sup>(2)</sup>                                                      |                     | 25°C                          | 11     |      |     | dB      |


(1) Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

(2) Referenced to  $2.5\text{ V}$


## 5.8 Typical Characteristics

Table of Graphs


|                |                                                 |                              | FIGURE |
|----------------|-------------------------------------------------|------------------------------|--------|
| $V_{IO}$       | Input offset voltage                            | Distribution                 | 3,4    |
|                |                                                 | vs Common-mode input voltage | 5,6    |
| $\alpha_{VIO}$ | Input offset voltage temperature coefficient    | Distribution                 | 7,8    |
| $I_B/I_{IO}$   | Input bias and input offset currents            | vs Free-air temperature      | 9      |
| $V_{OH}$       | High-level output voltage                       | vs High-level output current | 10,11  |
| $V_{OL}$       | Low-level output voltage                        | vs Low-level output current  | 12,13  |
| $V_{O(PP)}$    | Maximum peak-to-peak output voltage             | vs Frequency                 | 14     |
| $I_{OS}$       | Short-circuit output current                    | vs Supply voltage            | 15     |
|                |                                                 | vs Free-air temperature      | 16     |
| $V_{ID}$       | Differential input voltage                      | vs Output voltage            | 17, 18 |
|                | Differential gain                               | vs Load resistance           | 19     |
| $A_{VD}$       | Large-signal differential voltage amplification | vs Frequency                 | 20, 21 |
|                | Differential voltage amplification              | vs Free-air temperature      | 22, 23 |
| $z_o$          | Output impedance                                | vs Frequency                 | 24, 25 |
| CMRR           | Common-mode rejection ratio                     | vs Frequency                 | 26     |
|                |                                                 | vs Free-air temperature      | 27     |
| $k_{SVR}$      | Supply-voltage rejection ratio                  | vs Frequency                 | 28, 29 |
|                |                                                 | vs Free-air temperature      | 30     |
| $I_{DD}$       | Supply current                                  | vs Supply voltage            | 31     |
| SR             | Slew rate                                       | vs Load capacitance          | 32     |
|                |                                                 | vs Free-air temperature      | 33     |
| $V_O$          | Inverting large-signal pulse response           |                              | 34, 35 |
|                | Voltage-follower large-signal pulse response    |                              | 36, 37 |
|                | Inverting small-signal pulse response           |                              | 38, 39 |
|                | Voltage-follower small-signal pulse response    |                              | 40, 41 |
| $V_n$          | Equivalent input noise voltage                  | vs Frequency                 | 42, 43 |
|                | Noise voltage (referred to input)               | Over a 10-second period      | 44     |
| THD + N        | Total harmonic distortion plus noise            | vs Frequency                 | 45, 46 |
|                |                                                 | vs Free-air temperature      | 47     |
|                |                                                 | vs Supply voltage            | 48     |
| $\Phi_m$       | Phase margin                                    | vs Frequency                 | 20, 21 |
|                |                                                 | vs Load capacitance          | 49     |
|                | Gain margin                                     | vs Load capacitance          | 50     |
| $B_1$          | Unity-gain bandwidth                            | vs Load capacitance          | 51     |

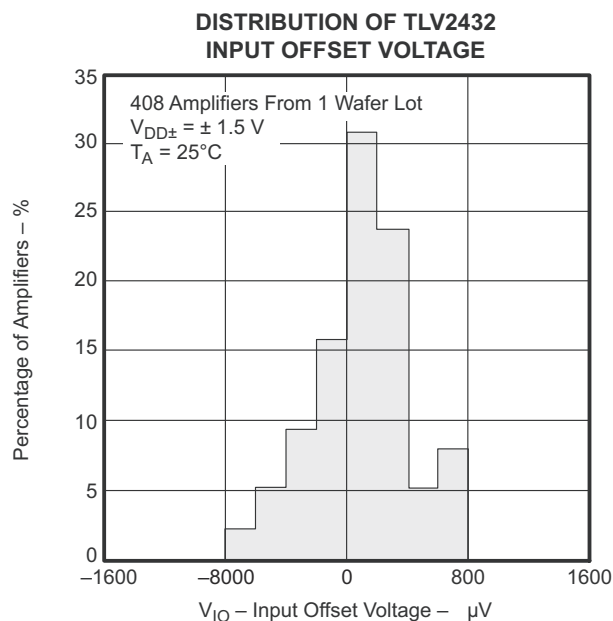


**Figure 5-1.**

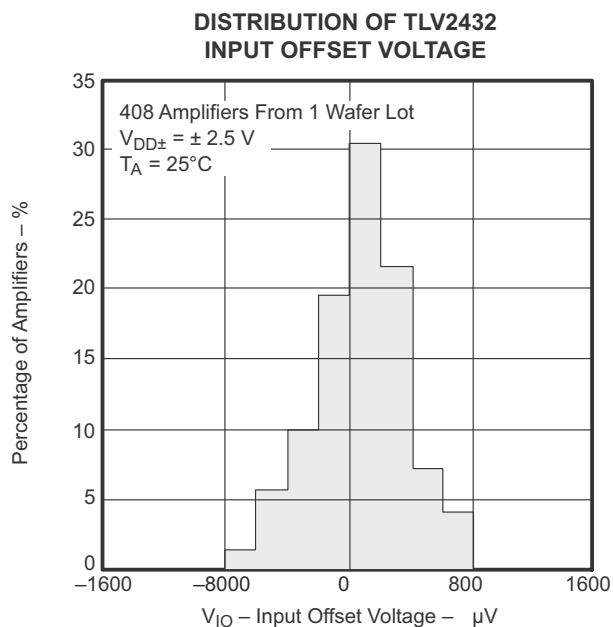

**Figure 5-2.**

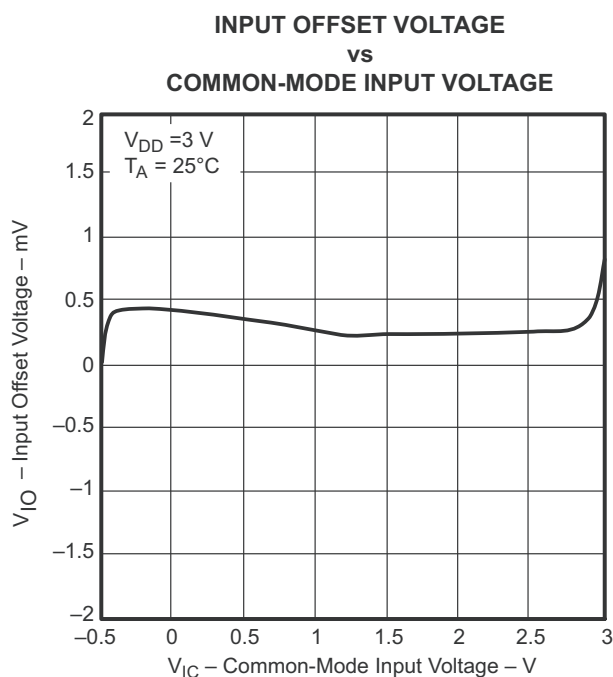

**Figure 5-3.**

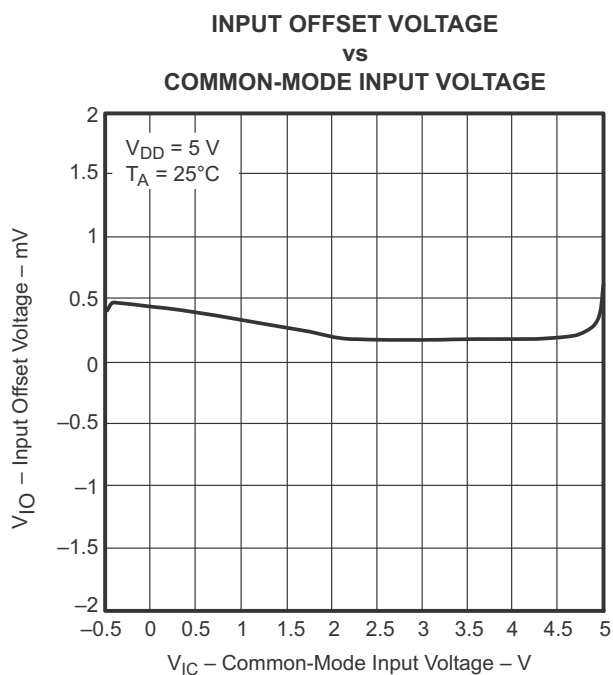

**Figure 5-4.**

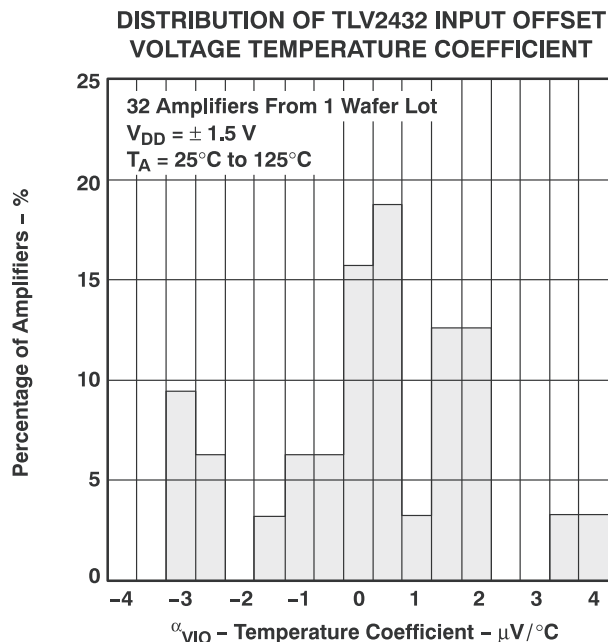


Figure 5-5.

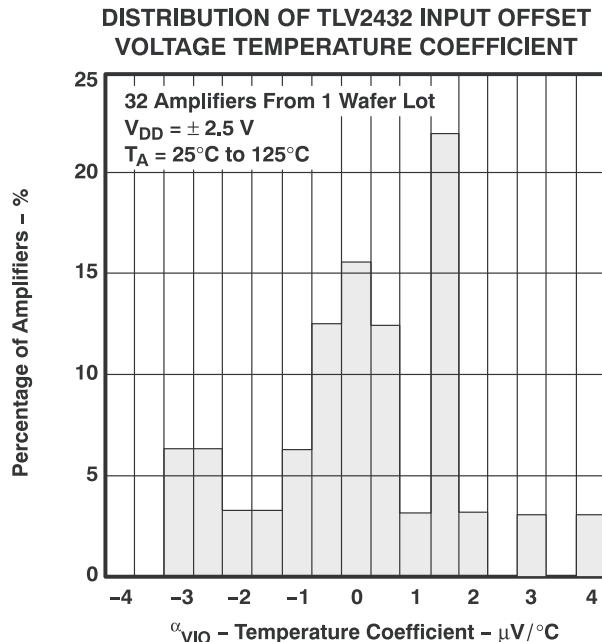


Figure 5-6.

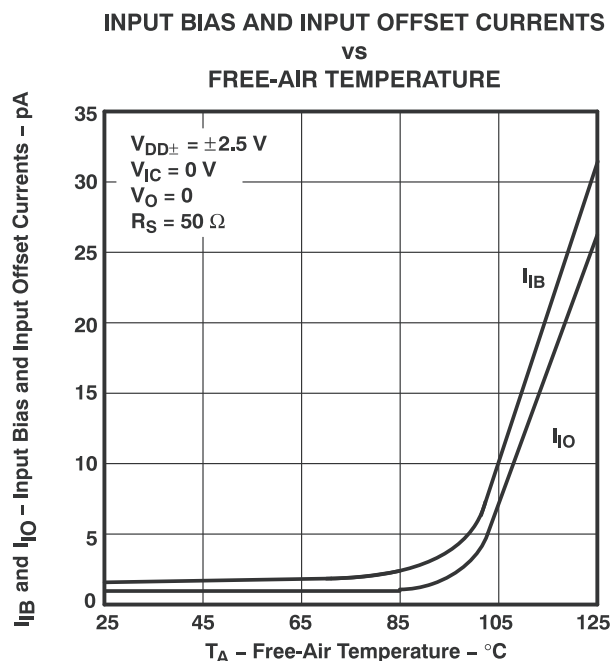


Figure 5-7.



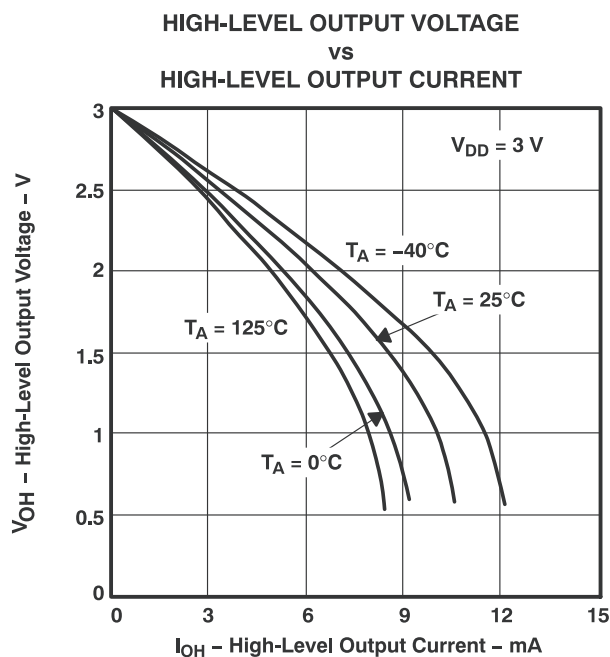



Figure 5-8.

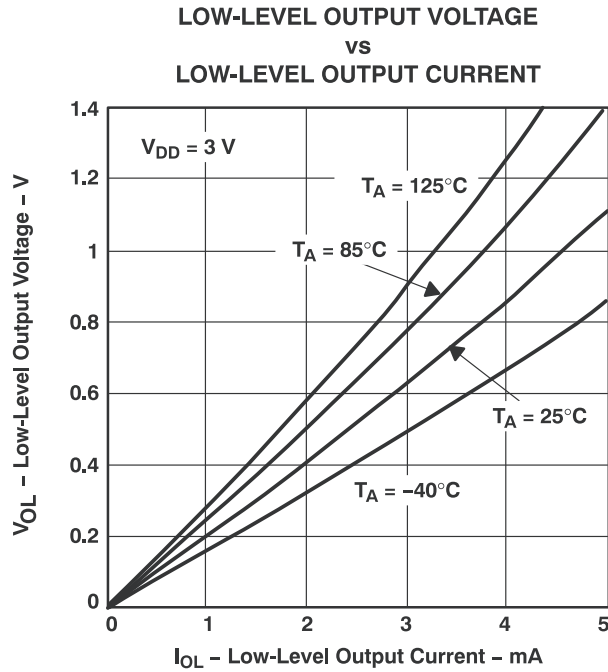


**Figure 5-9.**

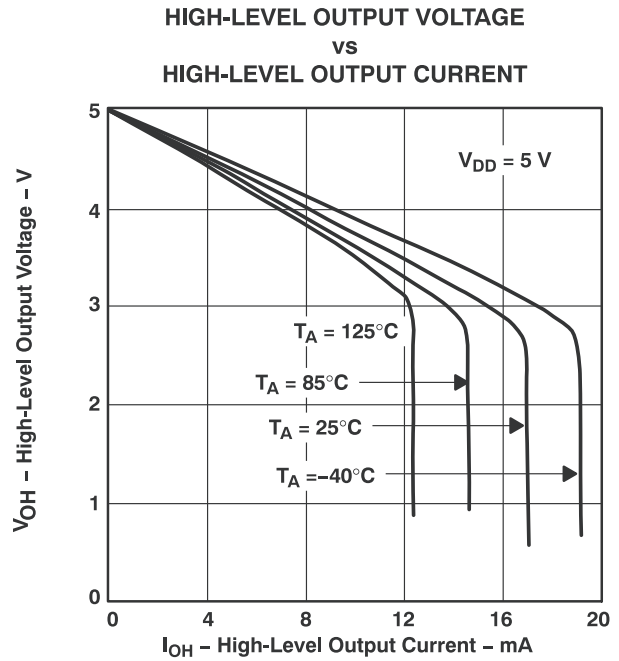


**Figure 5-10.**

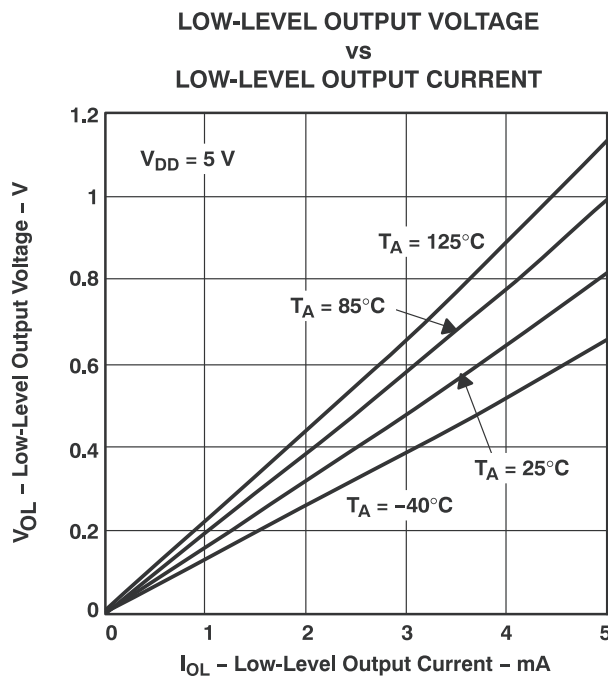


**Figure 5-11.**

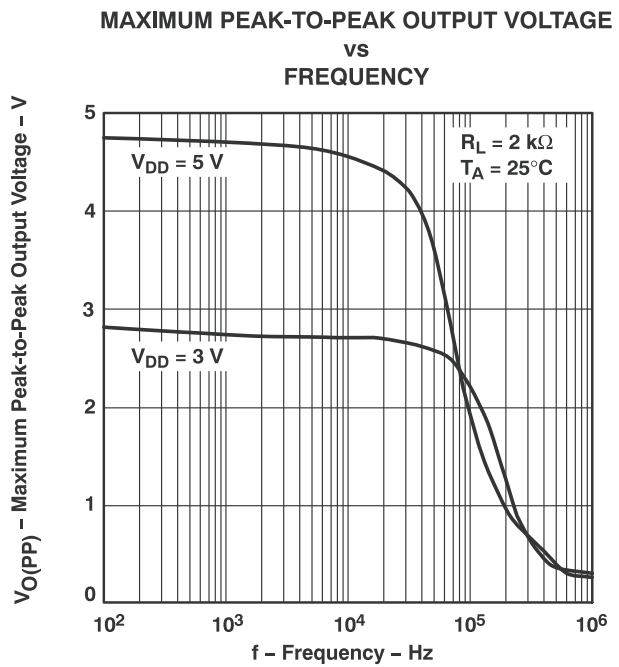


**Figure 5-12.**

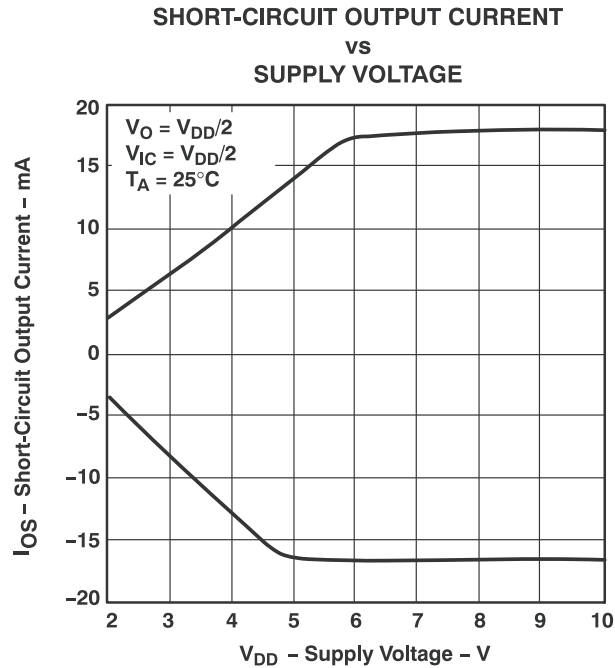


**Figure 5-13.**

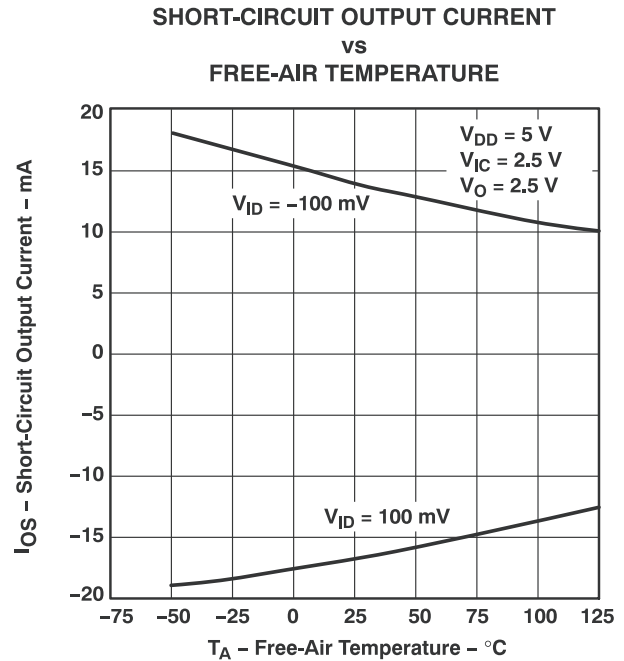


**Figure 5-14.**

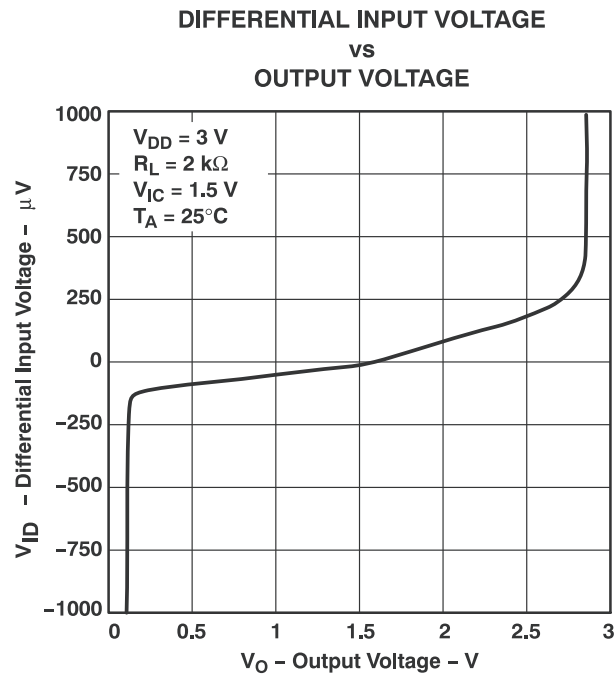


**Figure 5-15.**

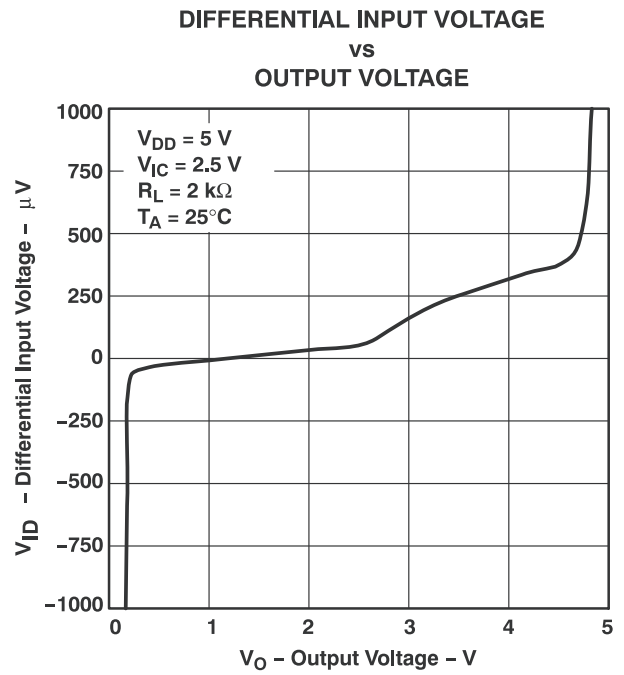


**Figure 5-16.**

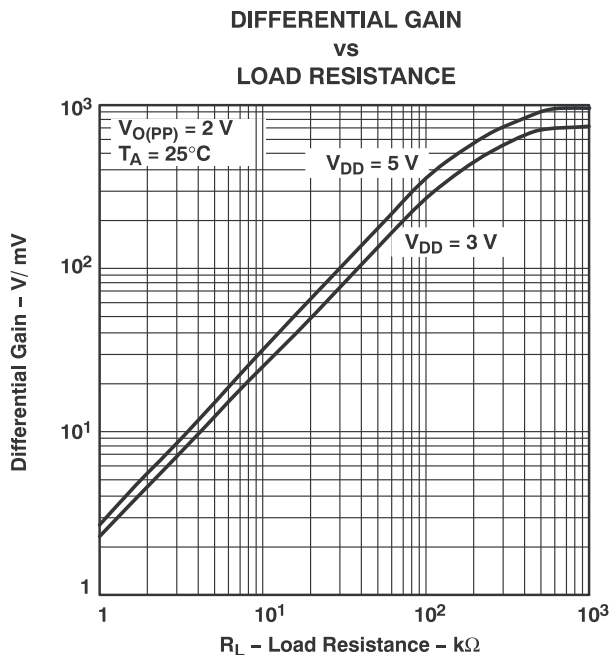


**Figure 5-17.**

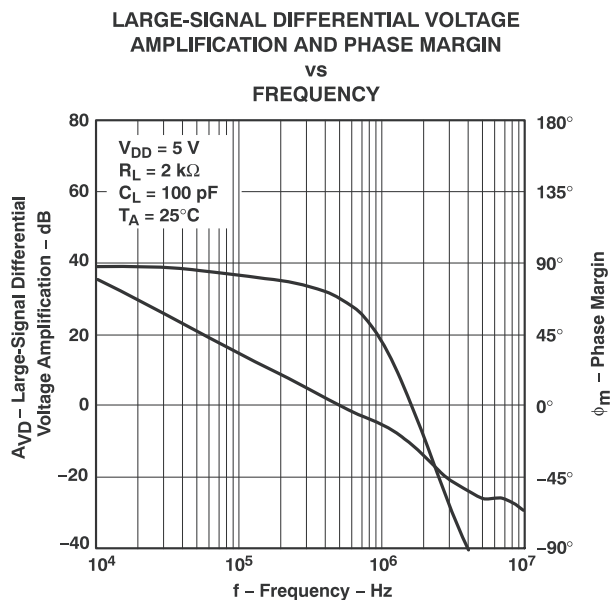


**Figure 5-18.**

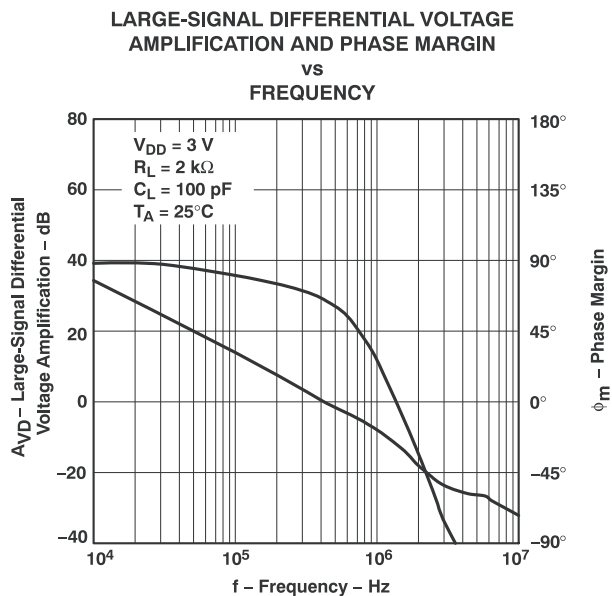


**Figure 5-19.**

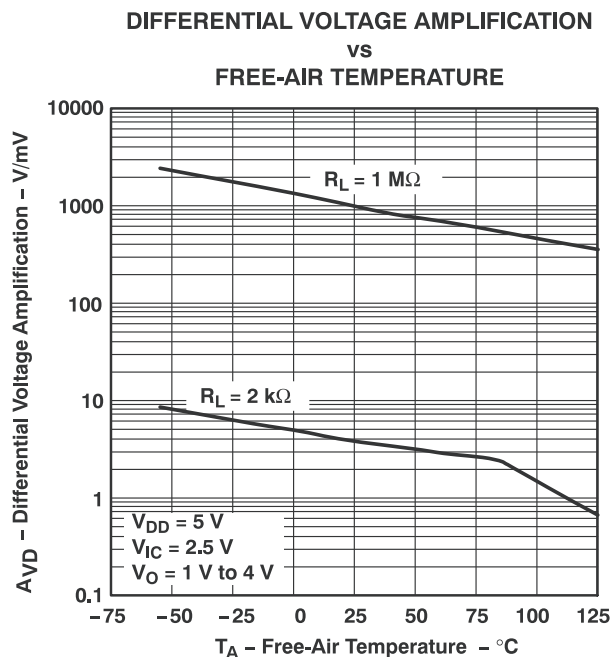


**Figure 5-20.**

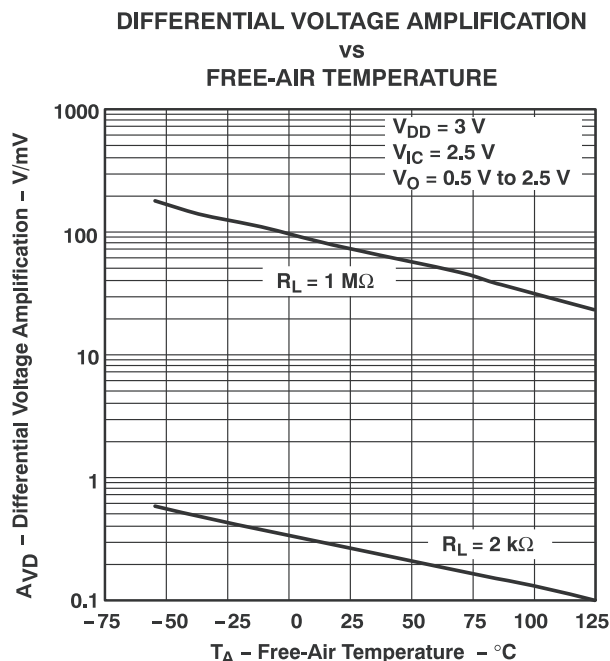


**Figure 5-21.**

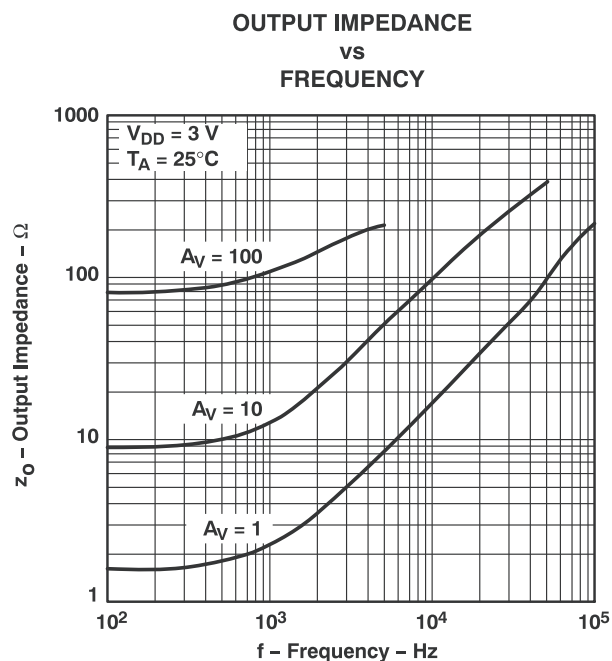


**Figure 5-22.**

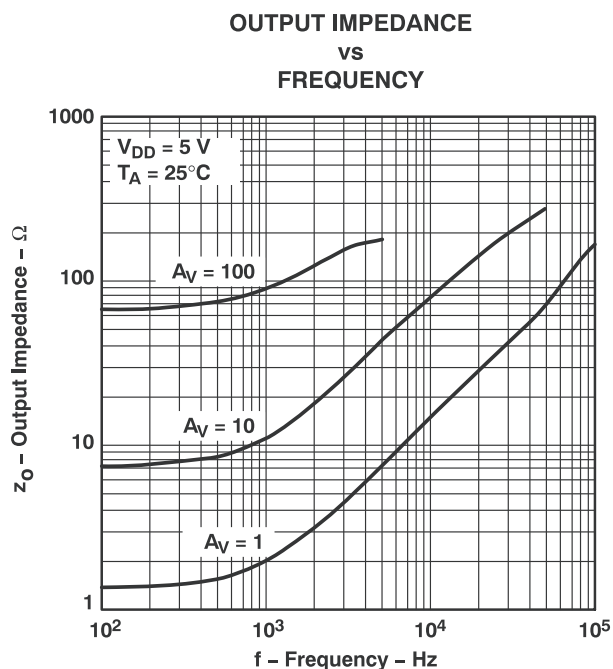


**Figure 5-23.**

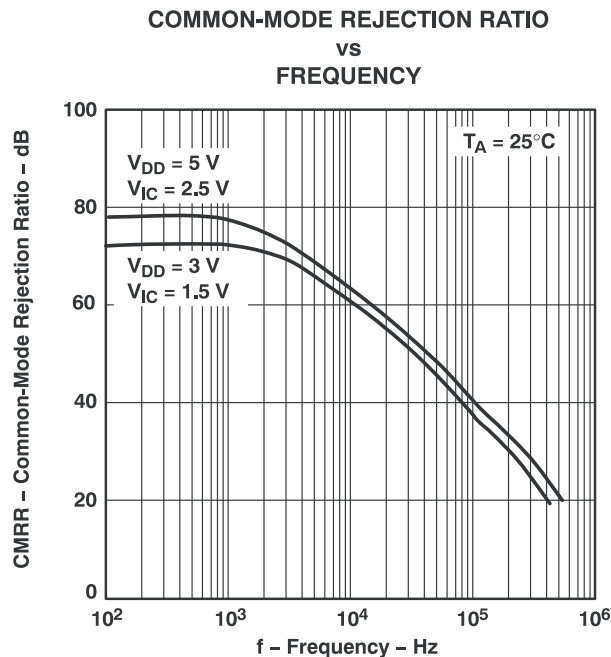


**Figure 5-24.**

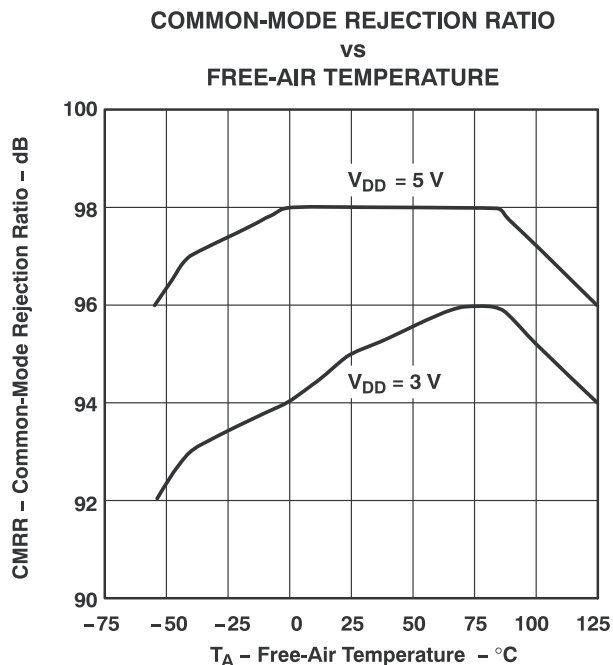

**Figure 5-25.**

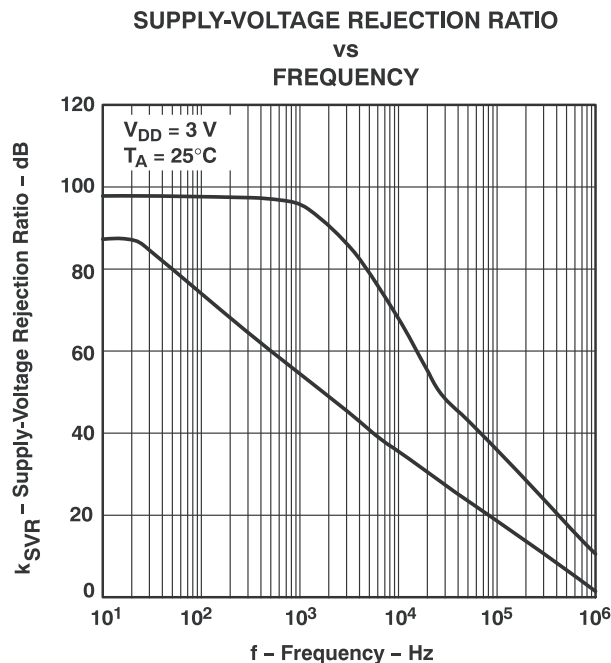

**Figure 5-26.**

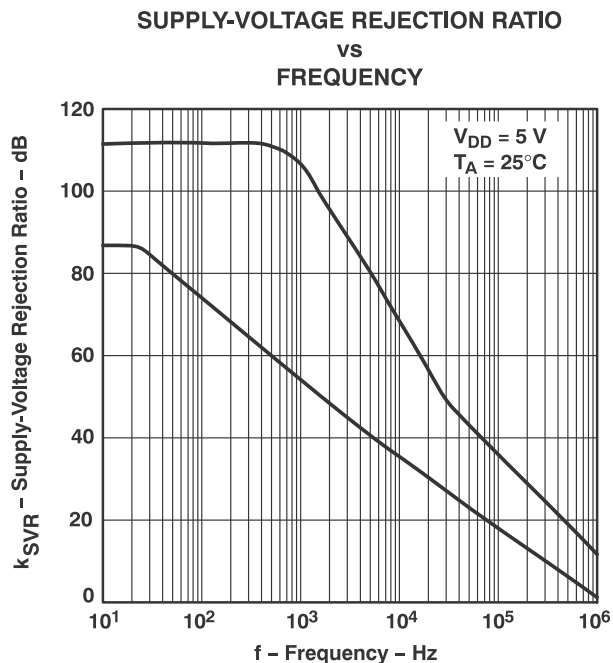

**Figure 5-27.**

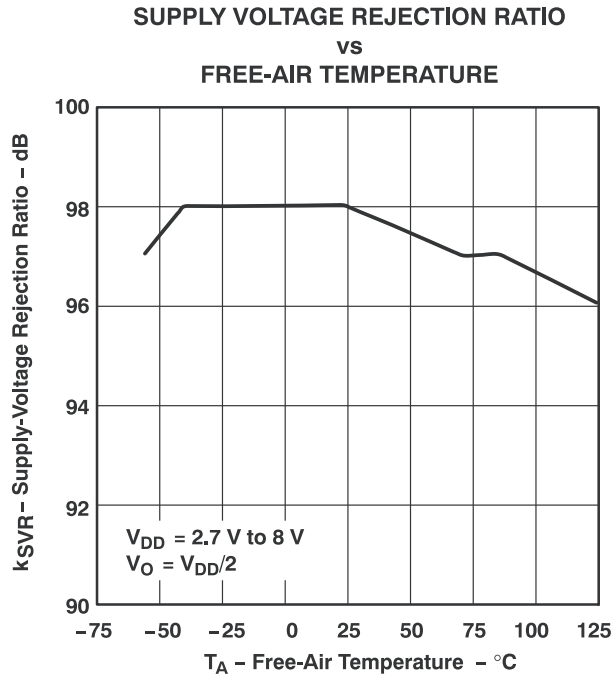


Figure 5-28.

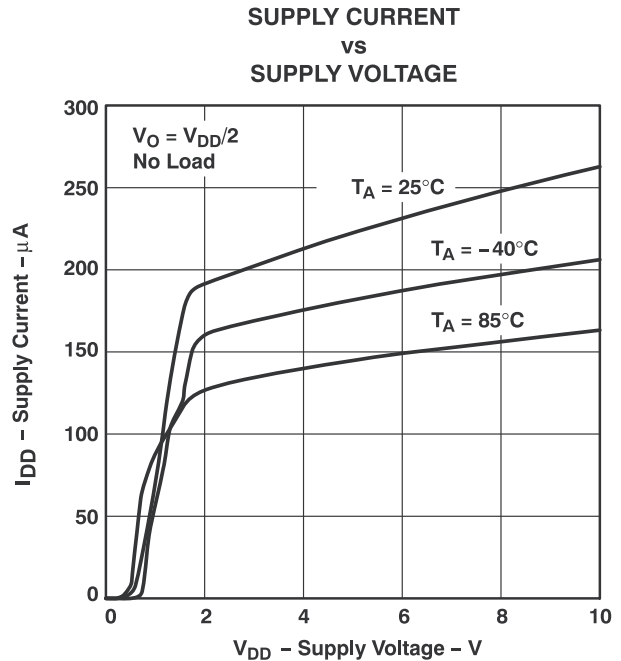


Figure 5-29.

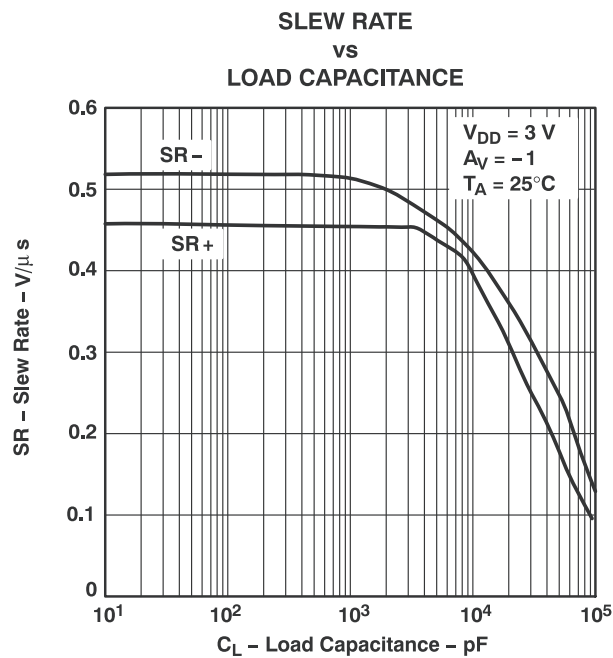


Figure 5-30.



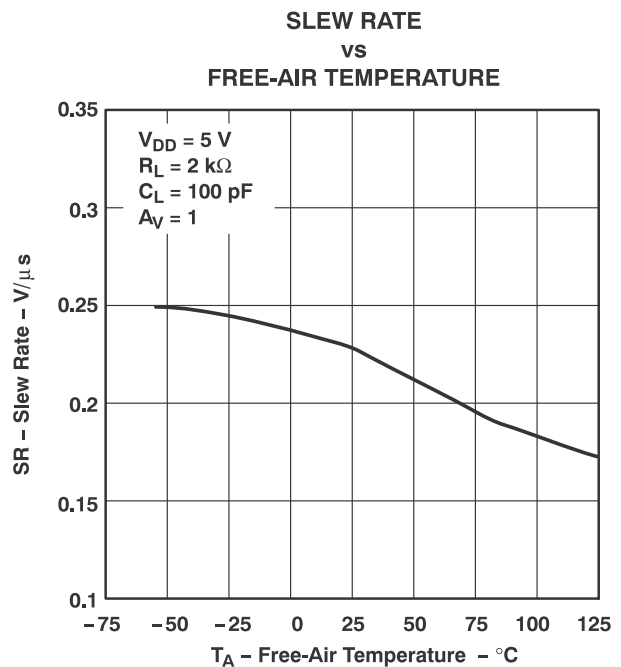



Figure 5-31.

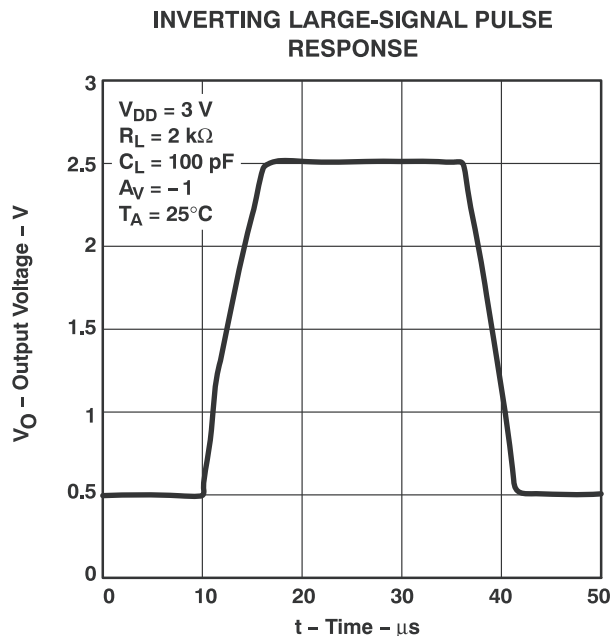


**Figure 5-32.**

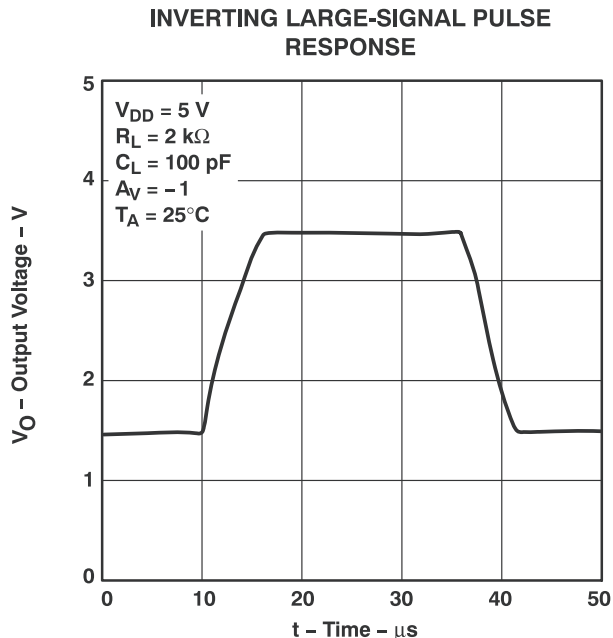

**Figure 5-33.**

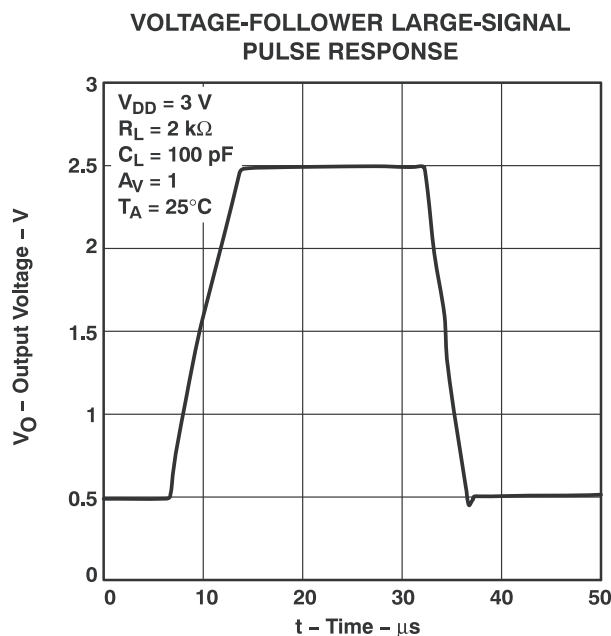

**Figure 5-34.**

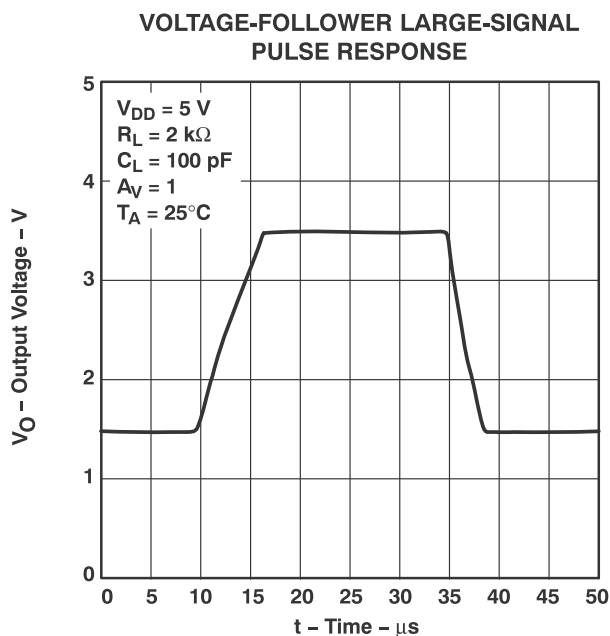

**Figure 5-35.**

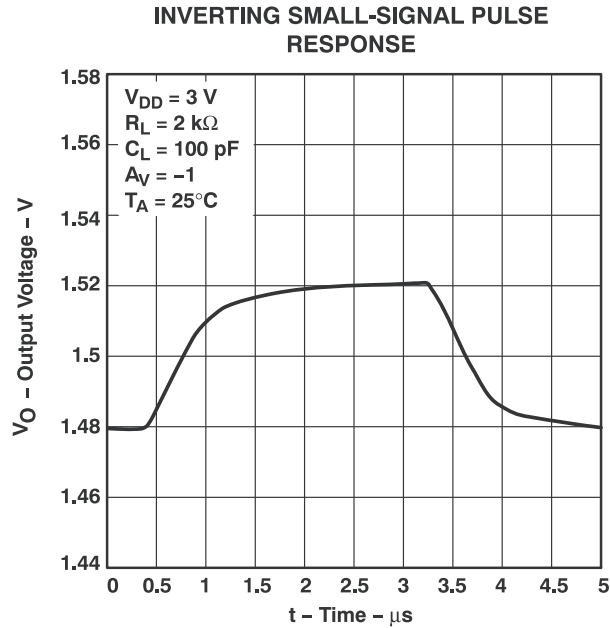


Figure 5-36.

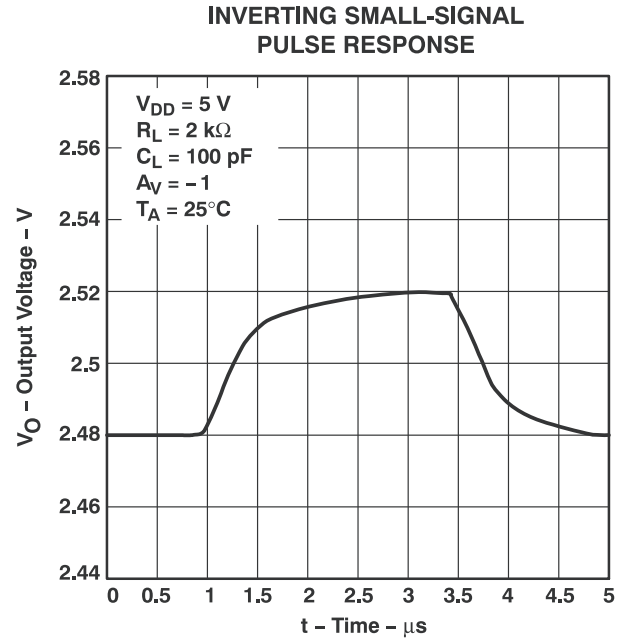


Figure 5-37.

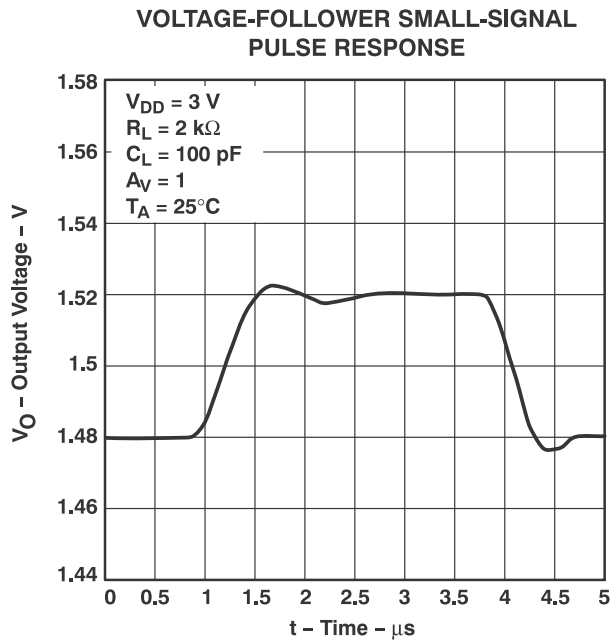


Figure 5-38.

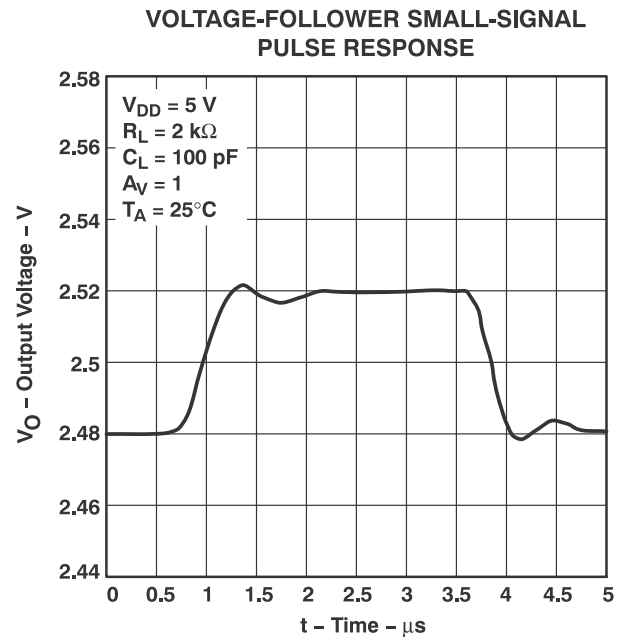


Figure 5-39.

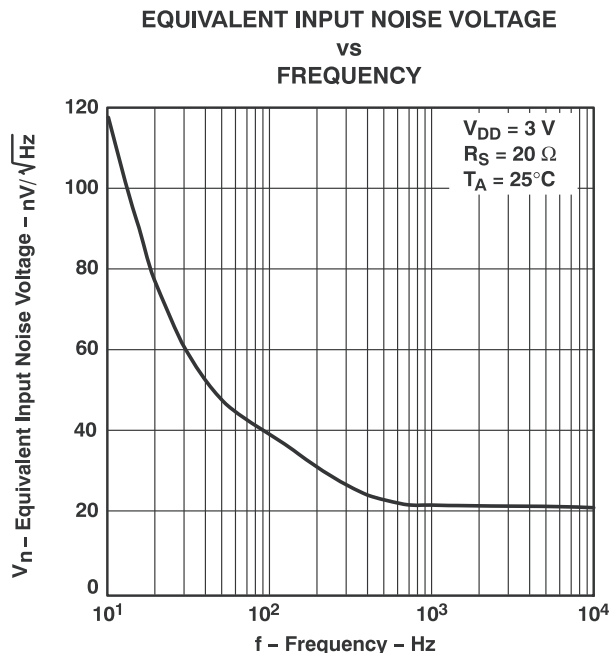


Figure 5-40.

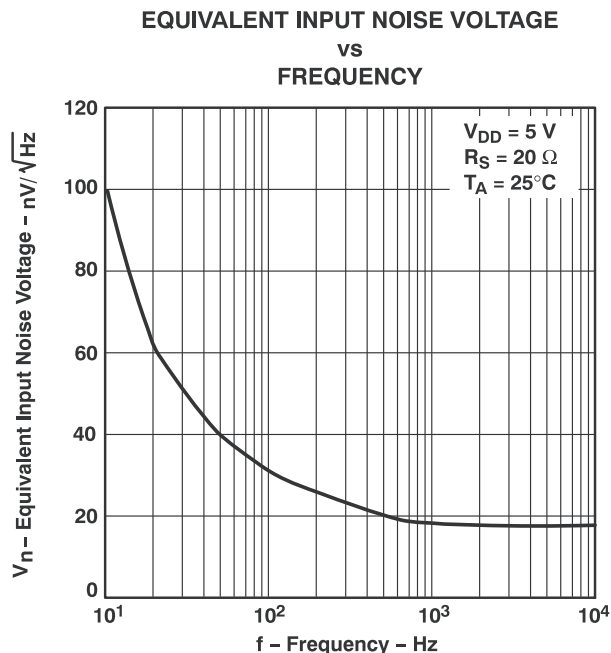


Figure 5-41.

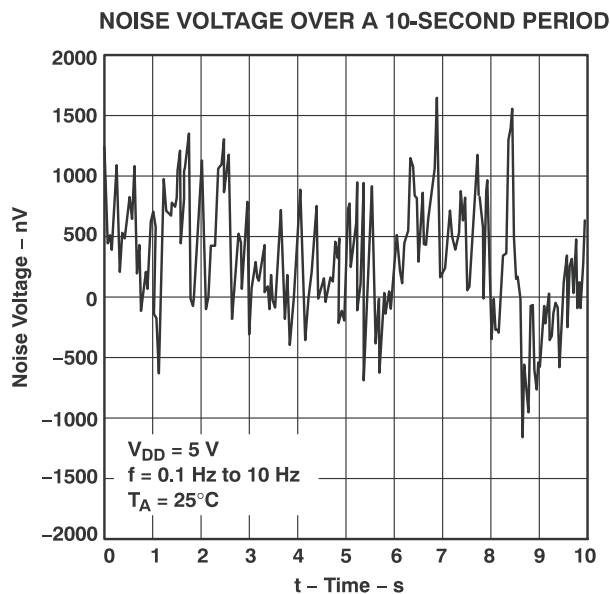


Figure 5-42.

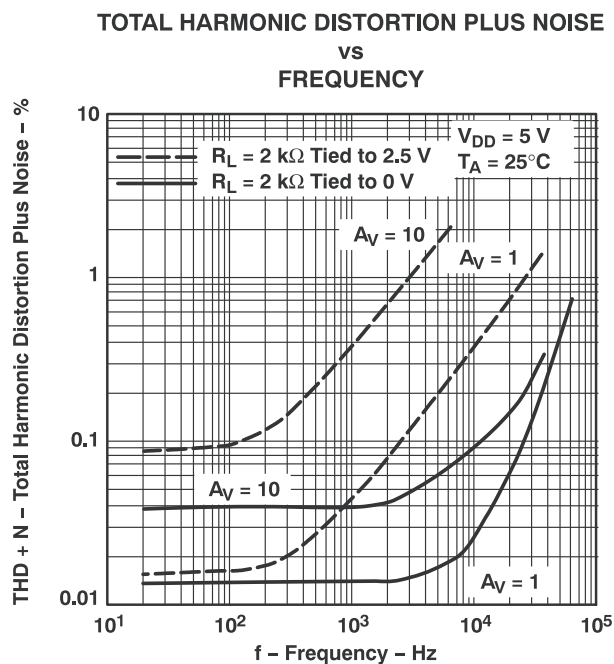


Figure 5-43.

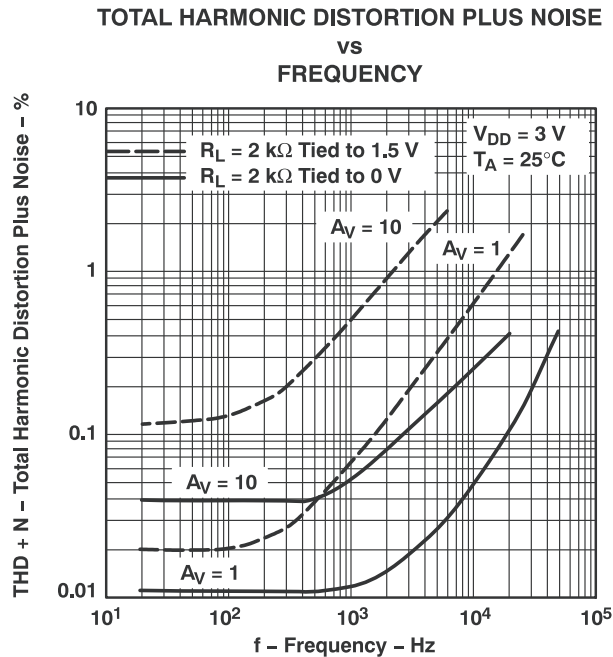


Figure 5-44.

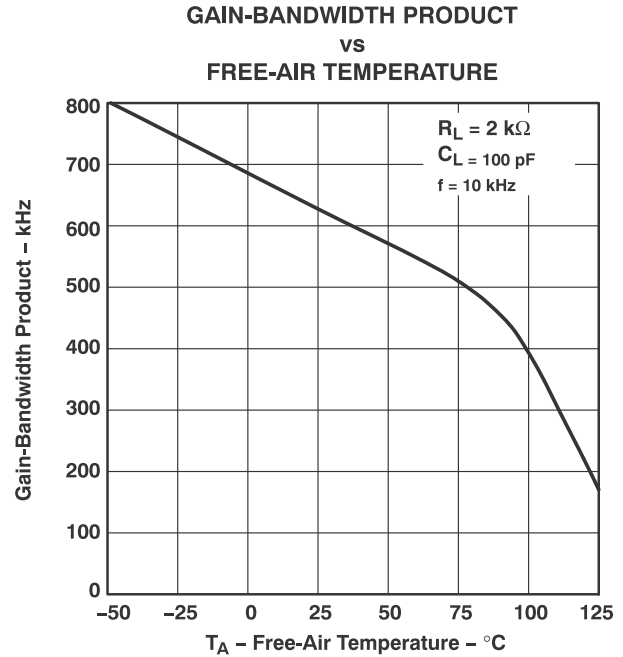


Figure 5-45.

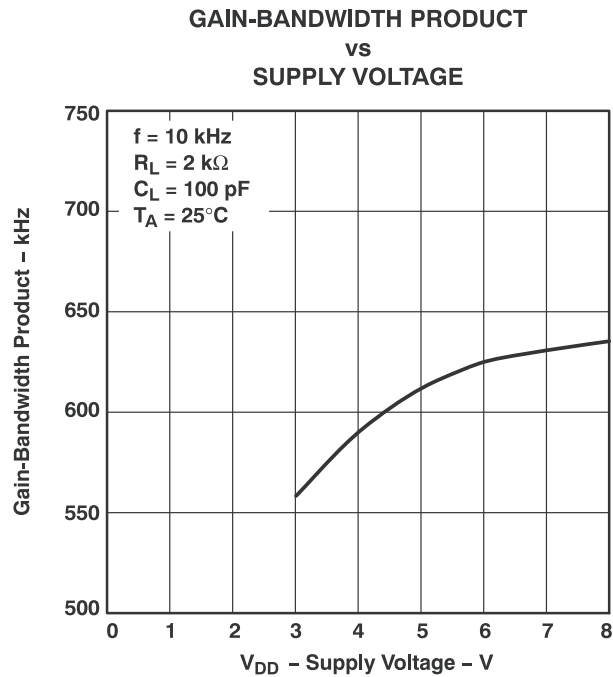


Figure 5-46.



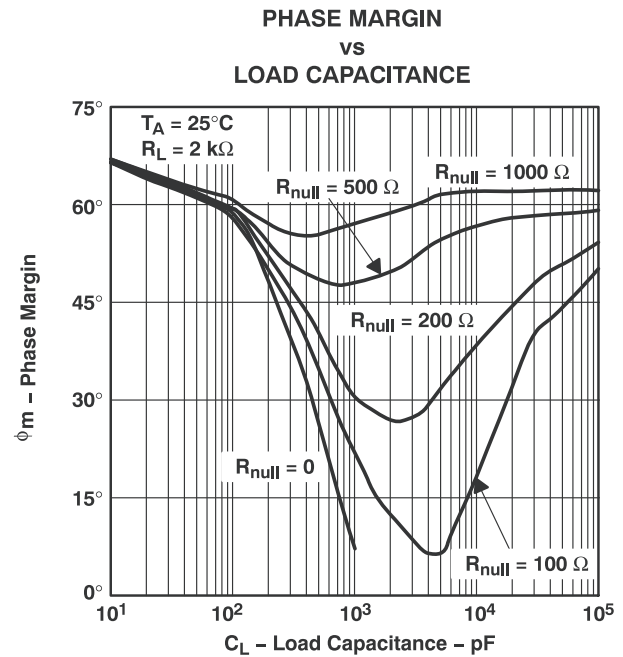


Figure 5-47.

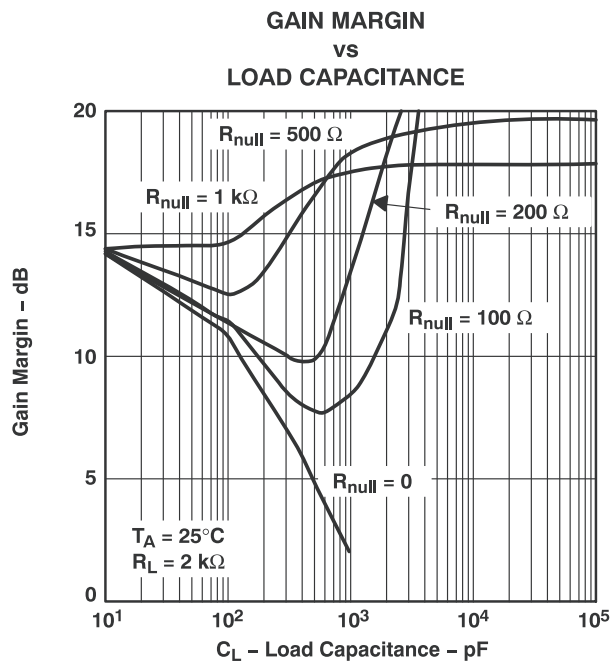

**Figure 5-48.**

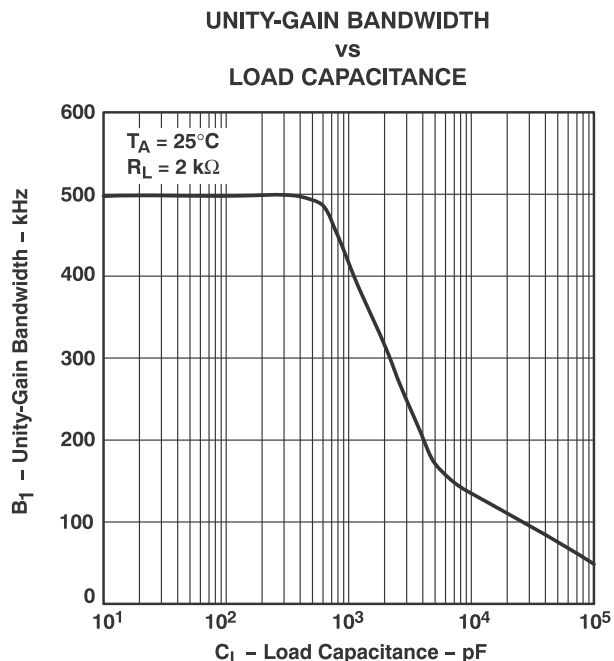

**Figure 5-49.**

## 6 Application and Implementation

---

### Note

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes, as well as validating and testing their design implementation to confirm system functionality.

---

### 6.1 Application Information


#### 6.1.1 Macromodel Information

Macromodel information provided was derived using Microsim Parts™, the model generation software used with Microsim PSpice™. The Boyle macromodel <sup>1</sup> and subcircuit in Figure 6-1 were generated using the TLV243x typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

---

<sup>1</sup> G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers," *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

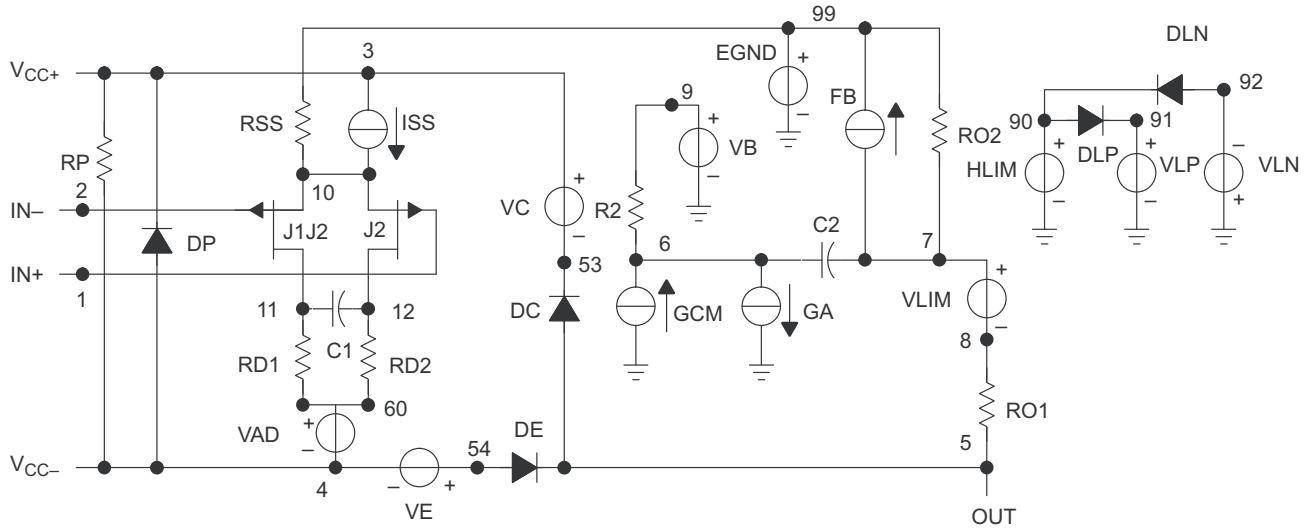

```
.SUBCKT TLV2432 1 2 3 4 5
C1      11      12      3.560E-12
C2      6        7      15.00E-12
DC      5        53     DX
DE      54       5      DX
DLP     90      91     DX
DLN     92      90     DX
DP      4        3     DX
EGND    99      0      POLY (2) (3,0) (4,0) 0 .5 .5
FB      7        99     POLY (5) VB VC VE VLP
+ VLN 0 21.04E6 -30E6 30E6 30E6 -30E6
GA      6        0      11      12 47.12E-6
GCM     0        6      10      99 4.9E-9
ISS     3        10     DC 8.250E-6
HLIM    90      0      VLIM 1K
J1      11      2       10 JX
J2      12      1       10 JX
R2      6        9      100.0E3
RD1     60      11     21.22E3
RD2     60      12     21.22E3
R01     8        5      120
R02     7        99     120
RP      3        4      26.04E3
RSS     10      99     24.24E6
VAD     60      4       -.6
VB      9        0      DC 0
VC      3        53     DC .65
VE      54      4       DC .65
VLIM    7        8      DC 0
VLP     91      0      DC 1.4
VLN     0       92     DC 9.4
.MODEL DX D (IS=800.0E-18)
.MODEL JX PJF (IS=500.0E-15 BETA=281E-6
+ VTO=-.065)
.ENDS
```

**Figure 6-1. Boyle Macromodel and Subcircuit**

## 7 Device and Documentation Support

TI offers an extensive line of development tools. Tools and software to evaluate the performance of the device, generate code, and develop solutions are listed below.

### 7.1 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on [ti.com](http://ti.com). Click on *Notifications* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 7.2 Support Resources

TI E2E™ support forums are an engineer's go-to source for fast, verified answers and design help — straight from the experts. Search existing answers or ask your own question to get the quick design help you need.

Linked content is provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's [Terms of Use](#).

### 7.3 Trademarks

Advanced LinCMOS™ and TI E2E™ are trademarks of Texas Instruments.

Microsim Parts™ is a trademark of MicroSim.

All trademarks are the property of their respective owners.

### 7.4 Electrostatic Discharge Caution



This integrated circuit can be damaged by ESD. Texas Instruments recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage.

ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### 7.5 Glossary

[TI Glossary](#) This glossary lists and explains terms, acronyms, and definitions.

## 8 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

| Changes from Revision B (January 2011) to Revision C (July 2025)                                                                                                       | Page |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|
| Updated the numbering, formatting, tables, figures and cross-references throughout the document to reflect modern datasheet standards.....                             | 1    |
| Deleted the TLV2434-Q1 preview device from <i>Ordering Information</i> .....                                                                                           | 2    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 3\text{ V}$ common-mode rejection ratio minimum value from: 70dB to: 63dB.....                                   | 4    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 3\text{ V}$ supply current (per channel) typical value for 25°C from: 98µA to: 115µA.....                        | 4    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 3\text{ V}$ supply current (per channel) maximum value for 25°C from: 125µA to: 150µA.....                       | 4    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 3\text{ V}$ supply current (per channel) maximum value for the full temperature range from: 130µA to: 175µA..... | 4    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 5\text{ V}$ common-mode rejection ratio minimum value from: 70dB to: 63dB.....                                   | 6    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 5\text{ V}$ supply current (per channel) typical value for 25°C from: 100µA to: 115µA.....                       | 6    |
| Changed <i>Electrical Characteristics</i> : $V_{DD} = 5\text{ V}$ supply current (per channel) maximum value for 25°C from: 125µA to: 150µA.....                       | 6    |

- Changed *Electrical Characteristics*:  $V_{DD} = 5\text{ V}$  supply current (per channel) maximum value for full temperature range from: 135 $\mu\text{A}$  to: 175 $\mu\text{A}$ .....6
- 

## 9 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

## PACKAGING INFORMATION

| Orderable part number          | Status<br>(1) | Material type<br>(2) | Package   Pins  | Package qty   Carrier | RoHS<br>(3) | Lead finish/<br>Ball material<br>(4) | MSL rating/<br>Peak reflow<br>(5) | Op temp (°C)          | Part marking<br>(6) |
|--------------------------------|---------------|----------------------|-----------------|-----------------------|-------------|--------------------------------------|-----------------------------------|-----------------------|---------------------|
| <a href="#">TLV2432AQDRQ1</a>  | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125            | 2432AQ              |
| TLV2432AQDRQ1.A                | Active        | Production           | null (null)     | 2500   LARGE T&R      | -           | NIPDAU                               | Level-1-260C-UNLIM                | See TLV2432AQDRQ1     | 2432AQ              |
| <a href="#">TLV2432QDRG4Q1</a> | Active        | Production           | SOIC (D)   8    | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125            | 2432Q1              |
| TLV2432QDRG4Q1.A               | Active        | Production           | null (null)     | 2500   LARGE T&R      | -           | NIPDAU                               | Level-1-260C-UNLIM                | See<br>TLV2432QDRG4Q1 | 2432Q1              |
| <a href="#">TLV2434AQDRQ1</a>  | Active        | Production           | SOIC (D)   14   | 2500   LARGE T&R      | Yes         | NIPDAU                               | Level-1-260C-UNLIM                | -40 to 125            | 2434AQ              |
| TLV2434AQDRQ1.A                | Active        | Production           | null (null)     | 2500   LARGE T&R      | -           | NIPDAU                               | Level-1-260C-UNLIM                | See TLV2434AQDRQ1     | 2434AQ              |
| <a href="#">TLV2434AQPWRQ1</a> | Active        | Production           | TSSOP (PW)   14 | 2000   LARGE T&R      | Yes         | NIPDAU                               | Level-3-260C-168 HR               | -40 to 125            | 2434AQ              |
| TLV2434AQPWRQ1.A               | Active        | Production           | null (null)     | 2000   LARGE T&R      | -           | NIPDAU                               | Level-3-260C-168 HR               | See<br>TLV2434AQPWRQ1 | 2434AQ              |

<sup>(1)</sup> **Status:** For more details on status, see our [product life cycle](#).

<sup>(2)</sup> **Material type:** When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> **RoHS values:** Yes, No, RoHS Exempt. See the [TI RoHS Statement](#) for additional information and value definition.

<sup>(4)</sup> **Lead finish/Ball material:** Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> **MSL rating/Peak reflow:** The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> **Part marking:** There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "-" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative

and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

**OTHER QUALIFIED VERSIONS OF TLV2432-Q1, TLV2432A-Q1, TLV2434A-Q1 :**

- Catalog : [TLV2432](#), [TLV2432A](#), [TLV2434A](#)

NOTE: Qualified Version Definitions:

- Catalog - TI's standard catalog product

## TAPE AND REEL INFORMATION



\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Reel Diameter (mm) | Reel Width W1 (mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1 (mm) | W (mm) | Pin1 Quadrant |
|----------------|--------------|-----------------|------|------|--------------------|--------------------|---------|---------|---------|---------|--------|---------------|
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 330.0              | 12.4               | 6.9     | 5.6     | 1.6     | 8.0     | 12.0   | Q1            |

## TAPE AND REEL BOX DIMENSIONS




\*All dimensions are nominal

| Device         | Package Type | Package Drawing | Pins | SPQ  | Length (mm) | Width (mm) | Height (mm) |
|----------------|--------------|-----------------|------|------|-------------|------------|-------------|
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |
| TLV2434AQPWRQ1 | TSSOP        | PW              | 14   | 2000 | 353.0       | 353.0      | 32.0        |

**D0014A****PACKAGE OUTLINE****SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT

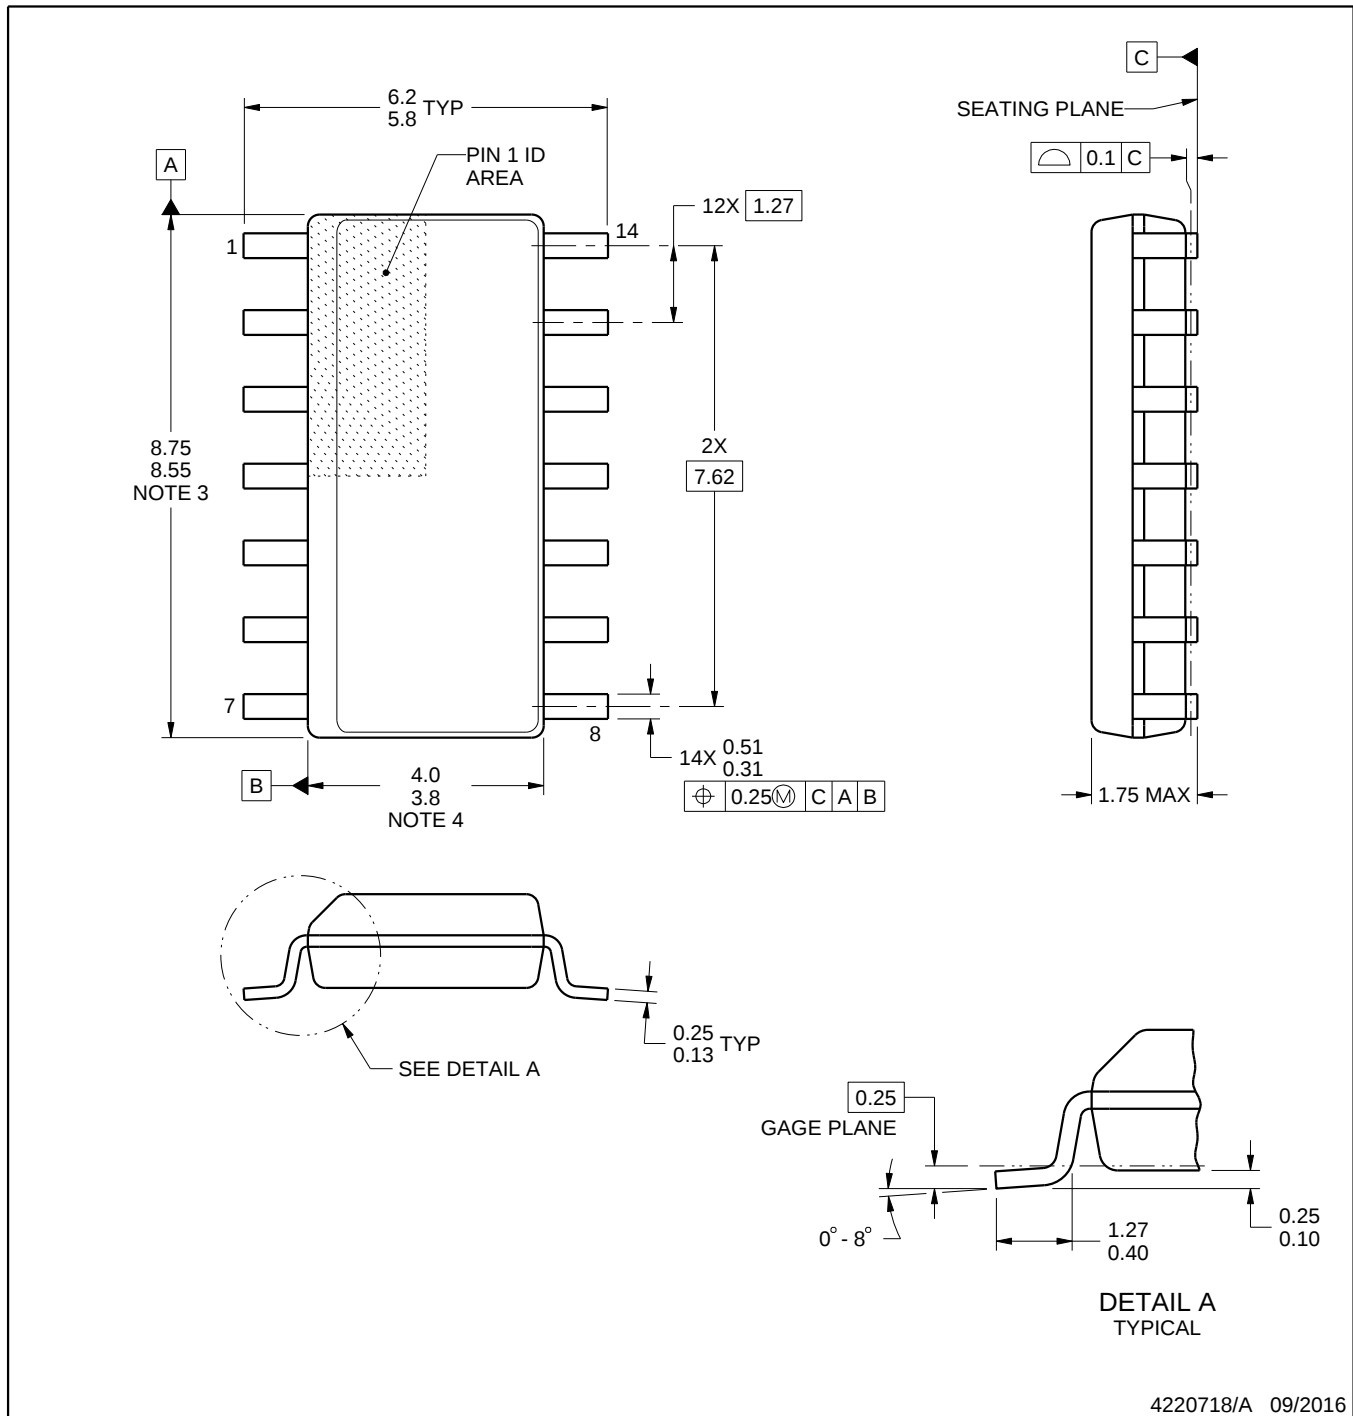

4220718/A 09/2016

**NOTES:**

1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm, per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
5. Reference JEDEC registration MS-012, variation AB.

# EXAMPLE BOARD LAYOUT

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
SCALE:8X



SOLDER MASK DETAILS

4220718/A 09/2016

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0014A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE:8X

4220718/A 09/2016

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.



## PACKAGE OUTLINE

**SOIC - 1.75 mm max height**

SMALL OUTLINE INTEGRATED CIRCUIT



1. Linear dimensions are in inches [millimeters]. Dimensions in parenthesis are for reference only. Controlling dimensions are in inches. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 [0.15] per side.
4. This dimension does not include interlead flash.
5. Reference JEDEC registration MS-012, variation AA.

# EXAMPLE BOARD LAYOUT

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE:8X



SOLDER MASK DETAILS

4214825/C 02/2019

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

## EXAMPLE STENCIL DESIGN

D0008A

SOIC - 1.75 mm max height

SMALL OUTLINE INTEGRATED CIRCUIT



SOLDER PASTE EXAMPLE  
BASED ON .005 INCH [0.125 MM] THICK STENCIL  
SCALE:8X

4214825/C 02/2019

NOTES: (continued)


8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

**PW0014A**

## PACKAGE OUTLINE

**TSSOP - 1.2 mm max height**

SMALL OUTLINE PACKAGE

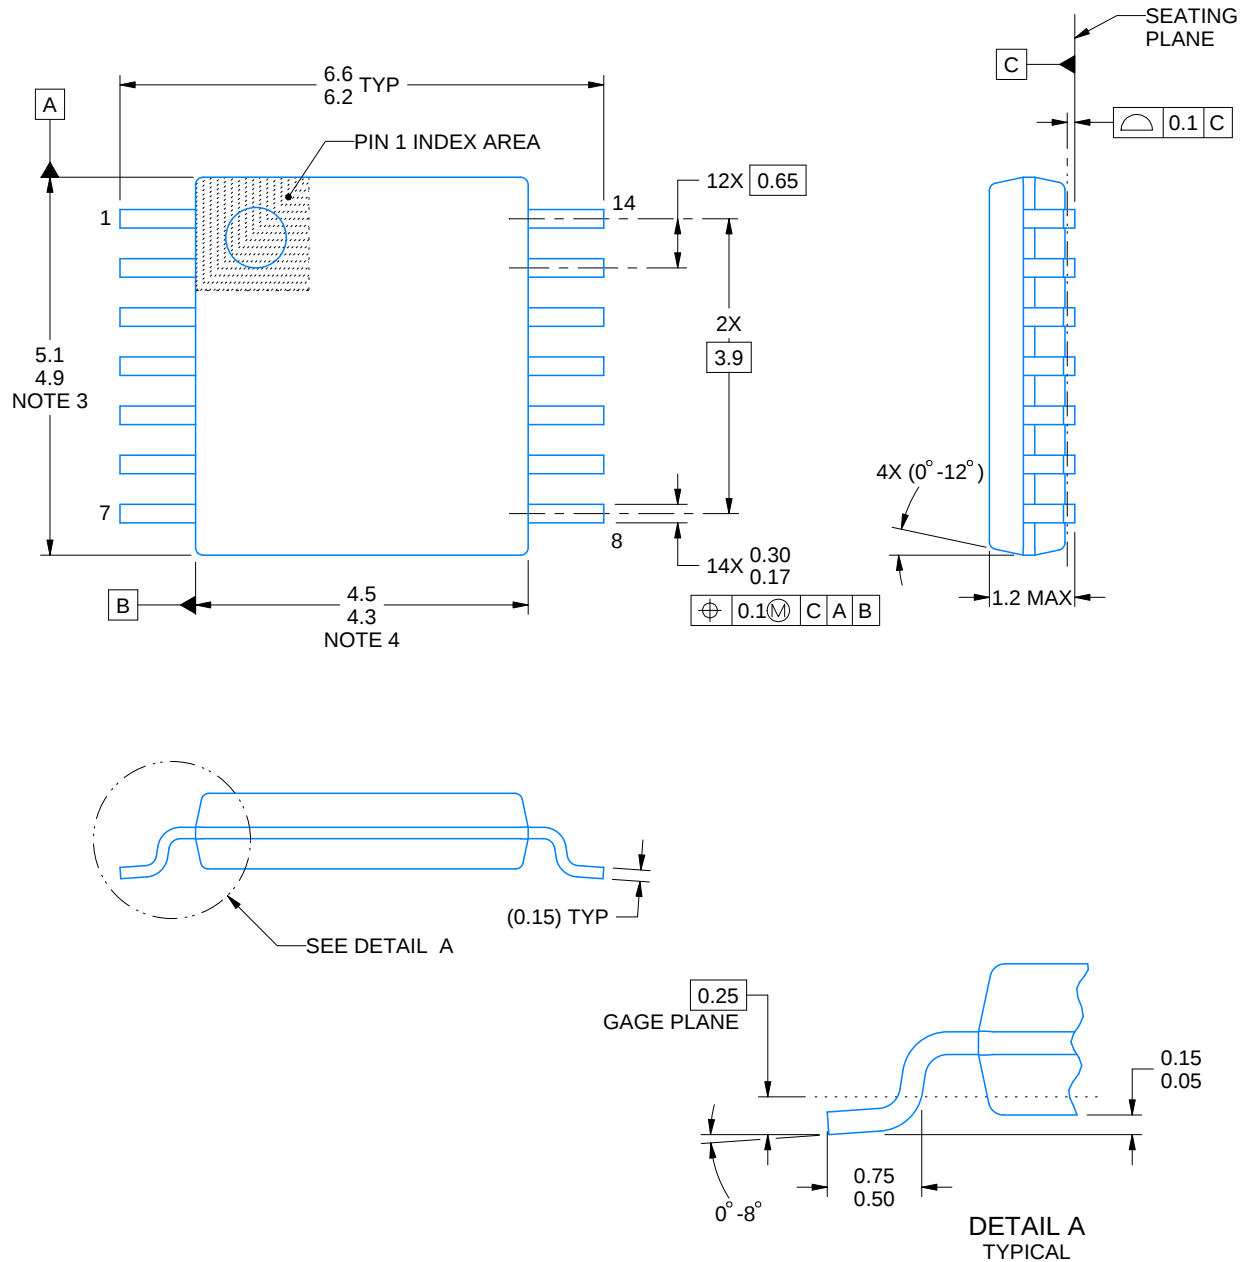

4220202/B 12/2023

NOTES:

1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
2. This drawing is subject to change without notice.
3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 mm per side.
4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
5. Reference JEDEC registration MO-153.

# EXAMPLE BOARD LAYOUT

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



LAND PATTERN EXAMPLE  
EXPOSED METAL SHOWN  
SCALE: 10X



SOLDER MASK DETAILS

4220202/B 12/2023

NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.

# EXAMPLE STENCIL DESIGN

PW0014A

TSSOP - 1.2 mm max height

SMALL OUTLINE PACKAGE



SOLDER PASTE EXAMPLE  
BASED ON 0.125 mm THICK STENCIL  
SCALE: 10X

4220202/B 12/2023

NOTES: (continued)

8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
9. Board assembly site may have different recommendations for stencil design.

## IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATA SHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to [TI's Terms of Sale](#) or other applicable terms available either on [ti.com](https://www.ti.com) or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

TI objects to and rejects any additional or different terms you may have proposed.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265  
Copyright © 2025, Texas Instruments Incorporated