




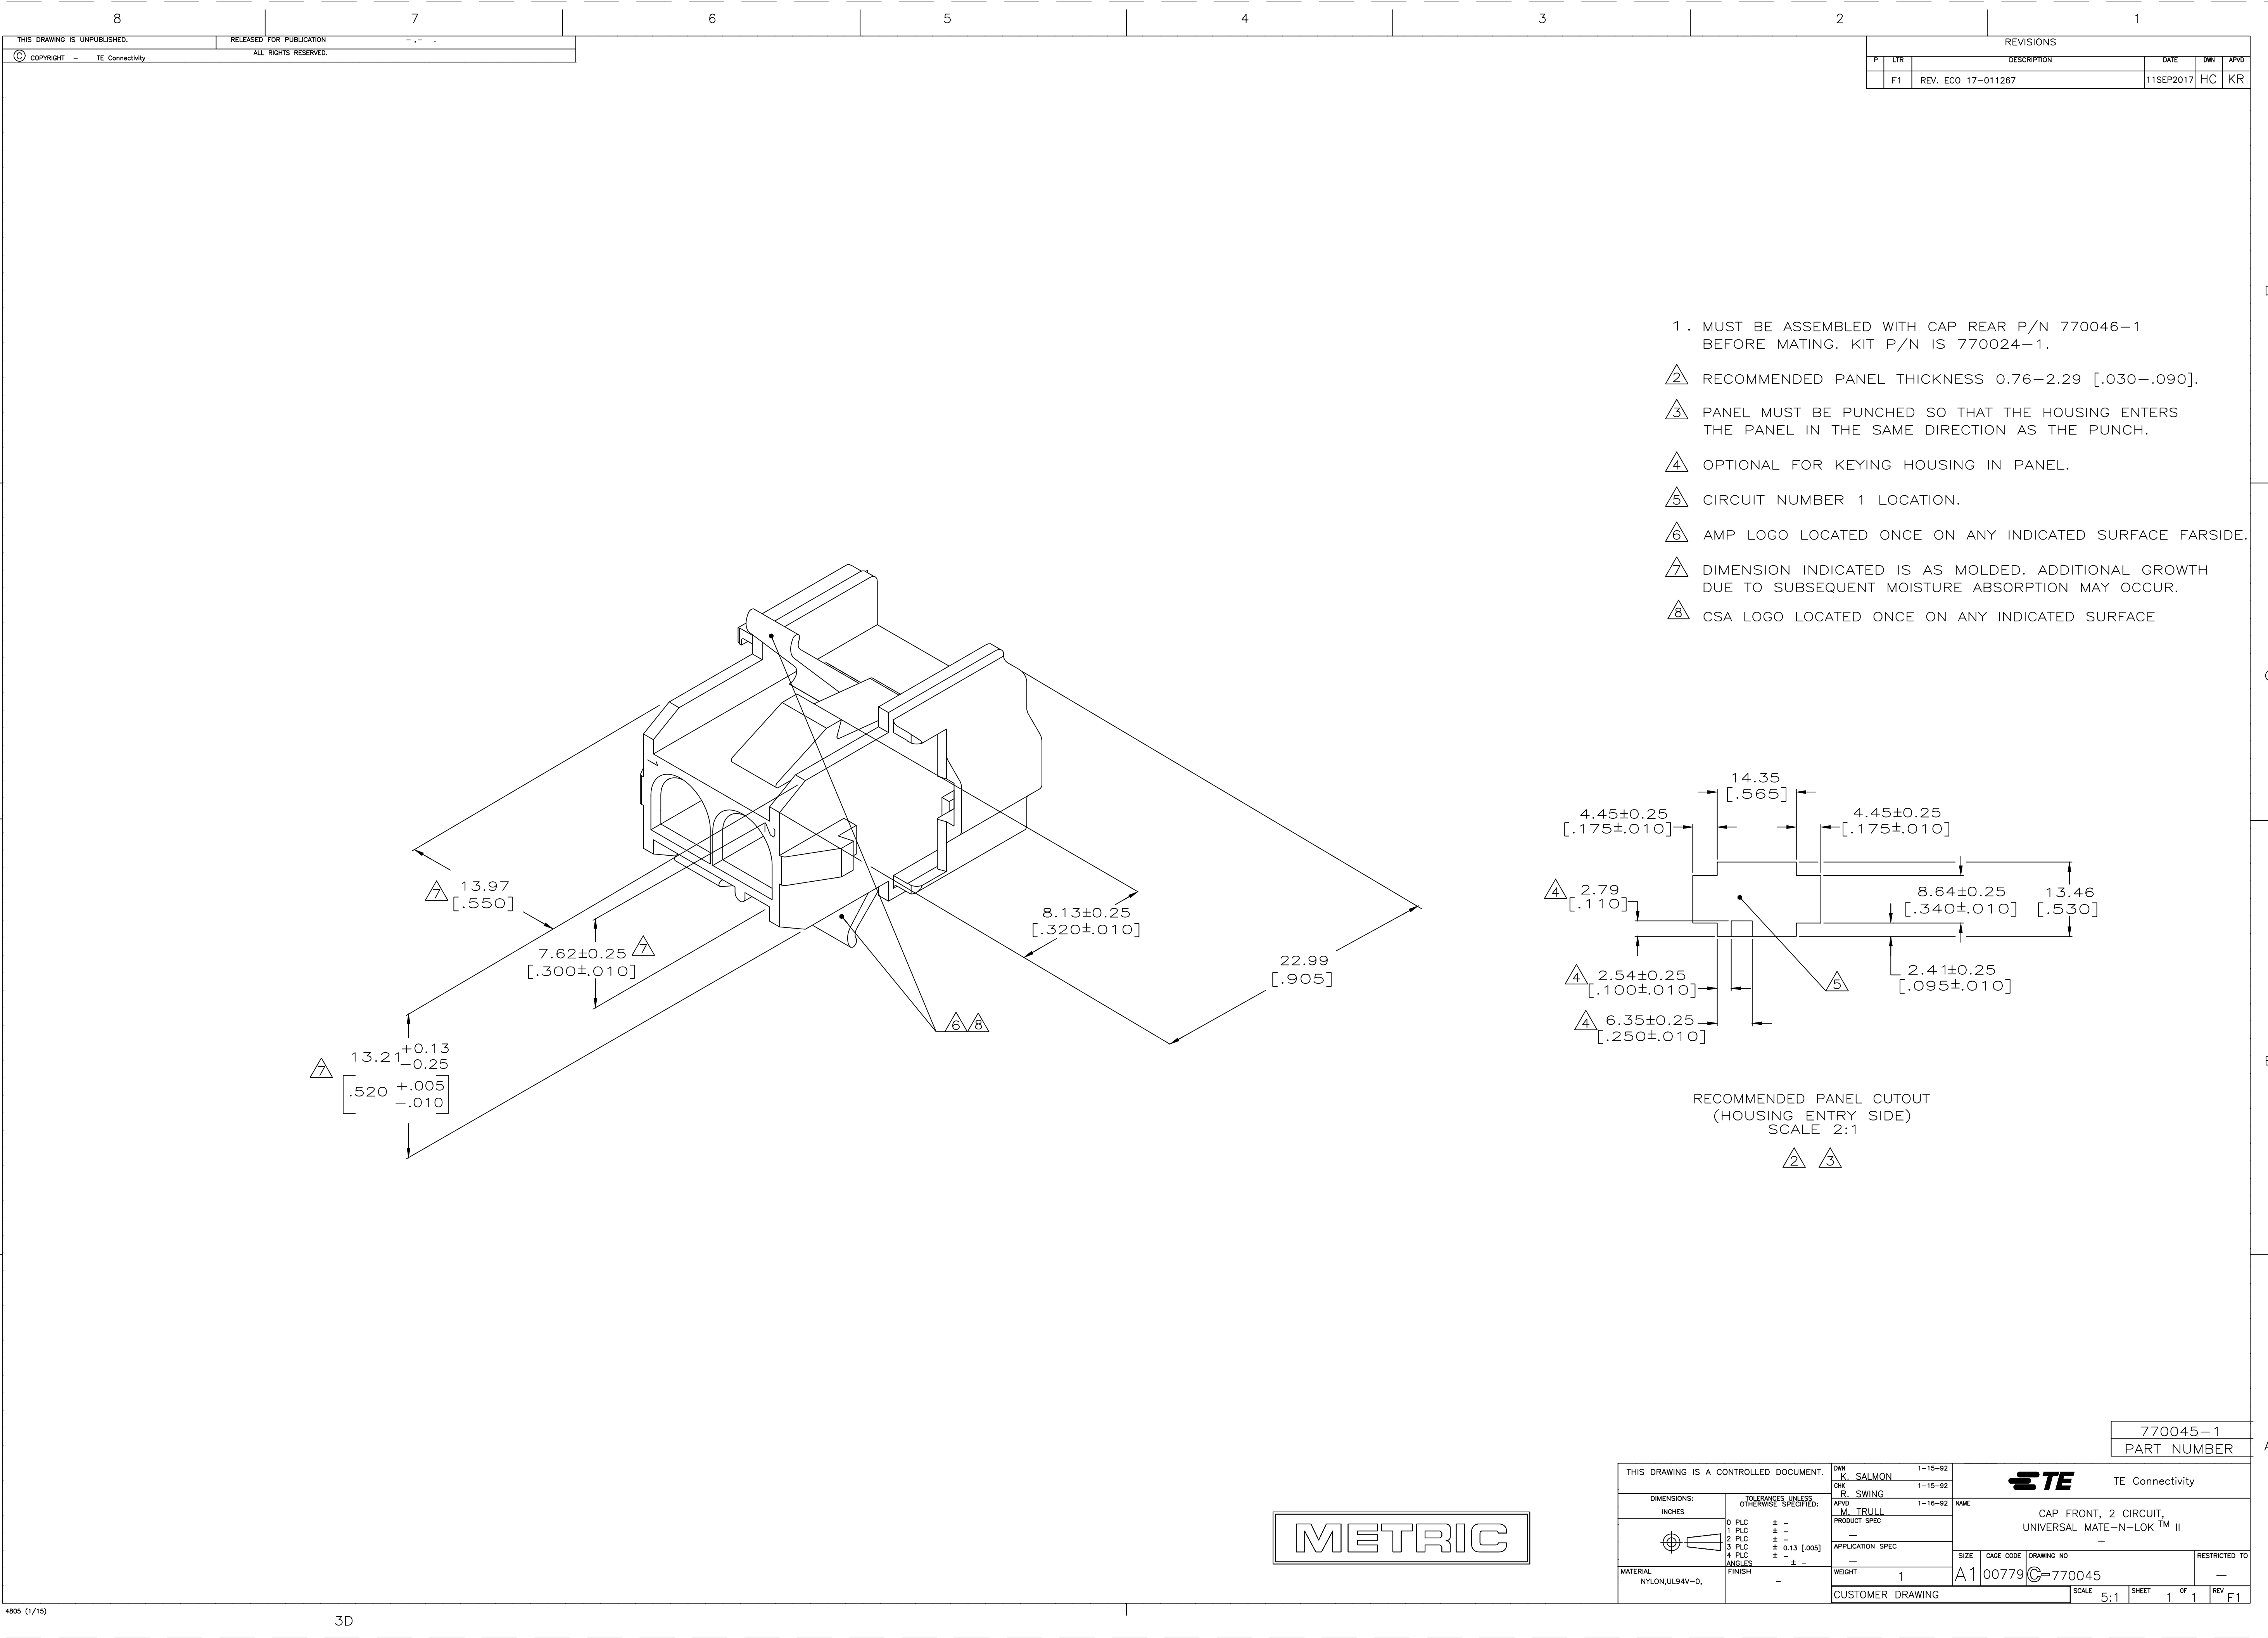

1. MUST BE ASSEMBLED WITH CAP REAR P/N 770046-1 BEFORE MATING. KIT P/N IS 770024-1.
2. RECOMMENDED PANEL THICKNESS 0.76-2.29 [.030-.090].
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. AMP LOGO LOCATED ONCE ON ANY INDICATED SURFACE FARSIDE.
7. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
8. CSA LOGO LOCATED ONCE ON ANY INDICATED SURFACE

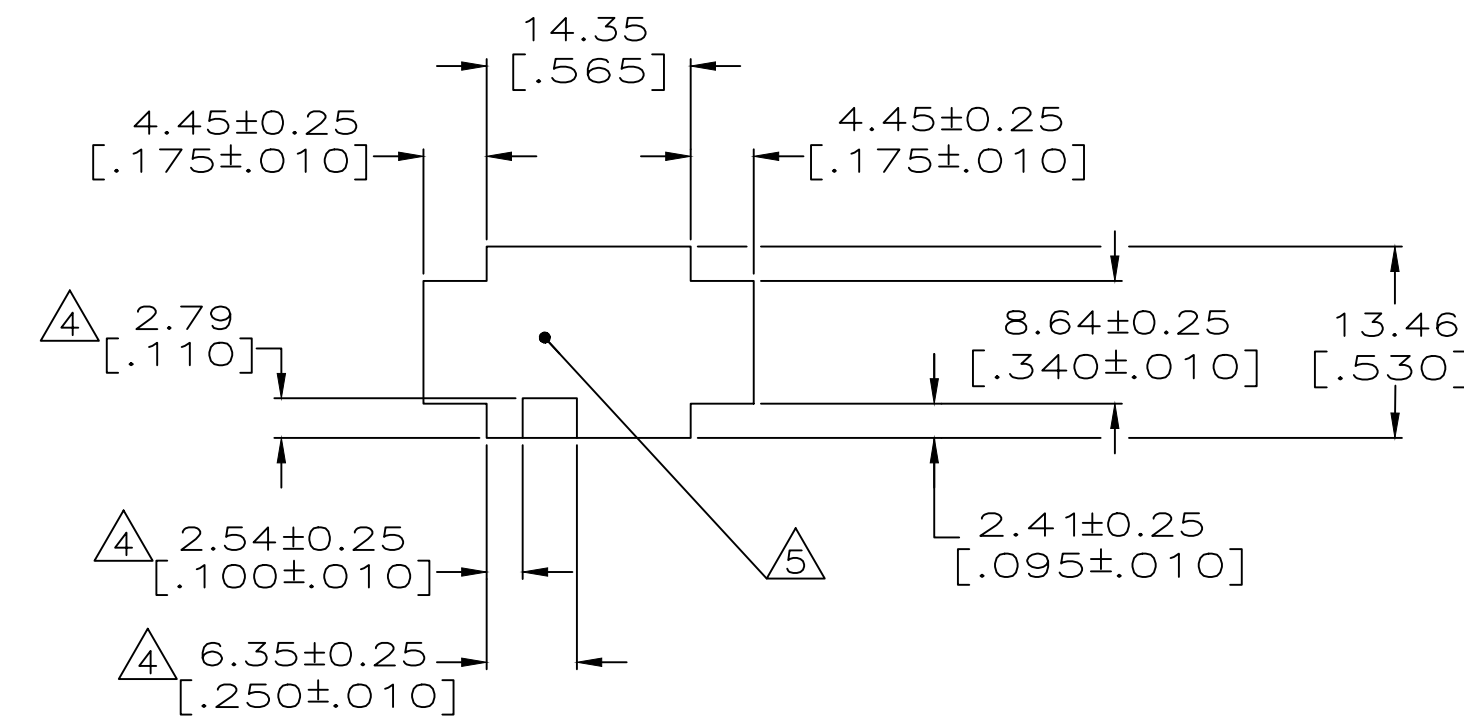

RECOMMENDED PANEL CUTOUT
(HOUSING ENTRY SIDE)
SCALE 2:1

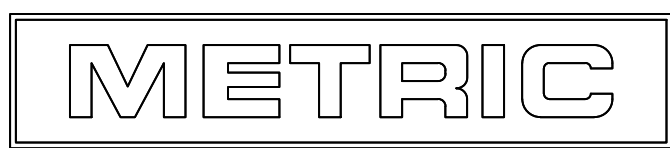

770045-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN K. SALMON	1-15-92	TE Connectivity	
DIMENSIONS: INCHES		CHK R. SWING	1-15-92		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP'D M. TRULL	1-16-92	NAME	
0 PLC ± -		PRODUCT SPEC		CAP FRONT, 2 CIRCUIT, UNIVERSAL MATE-N-LOK™ II	
1 PLC ± -		APPLICATION SPEC		-	
2 PLC ± -		WEIGHT		RESTRICTED TO	
3 PLC ± 0.13 [.005]		1		-	
4 PLC ± -		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 OF 1 REV F1	
ANGLES ± -		SIZE A1		CAGE CODE 00779	
FINISH -		DRAWING NO. C=770045		CUSTOMER DRAWING	
MATERIAL NYLON,UL94V-0,		SCALE 5:1		SHEET 1 OF 1	