
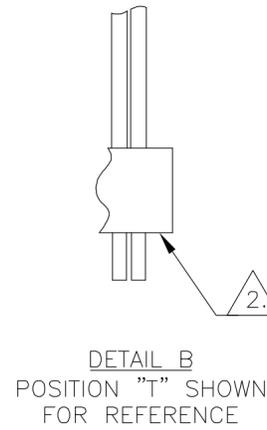


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	DO	P	LTR	DESCRIPTION	DATE	DWN	APVD
		D		UPDATE PER 0H2Y-0026-04	01-23-04	JDM	MKS

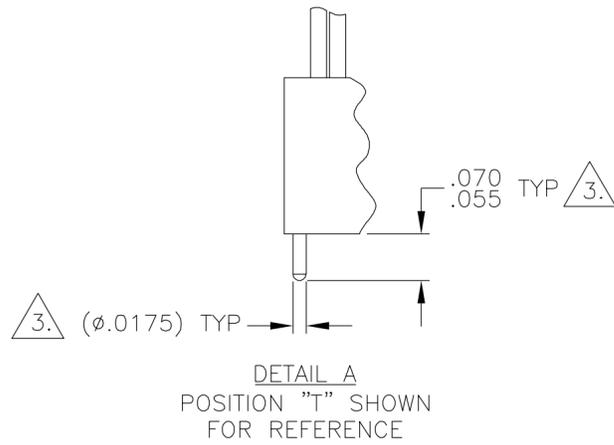

- T ○○○○○○○○ POSITION 1
- U ○●○○○○○○○ POSITION 2
- V ○○●○○○○○○ POSITION 3
- W ●○○○○○○○ POSITION 1, AND SECOND TO LAST POSITION
- Y ●○○○○○●○○ POSITION 1, AND THIRD TO LAST POSITION
- Z ○●○○○○○○○ POSITION 2, AND THIRD TO LAST POSITION





- T ○○○○○○○○ POSITION 1
- U ○○○○○○○○ POSITION 2
- V ○○○○○○●○○ POSITION 3
- W ●○○○○○○○ POSITION 1, AND SECOND TO LAST POSITION
- Y ○●○○○○○○○ POSITION 1, AND THIRD TO LAST POSITION
- Z ○○●○○○○○○ POSITION 2, AND THIRD TO LAST POSITION

SIZE	C DIM	(L DIM)
04	.115	(.075)
09	.240	(.200)
15	.390	(.350)

△6.	25	.640	(.600)
△6.	37	.940	(.900)
△6.	51	1.290	(1.250)

△3. △4. PLUG POLARIZING GUIDE POST
 "PGP" POSITIONS, SEE DETAIL A.

△2. △4. RECEPTACLE POLARIZING GUIDE POST
 "PGP" POSITIONS, SEE DETAIL B.

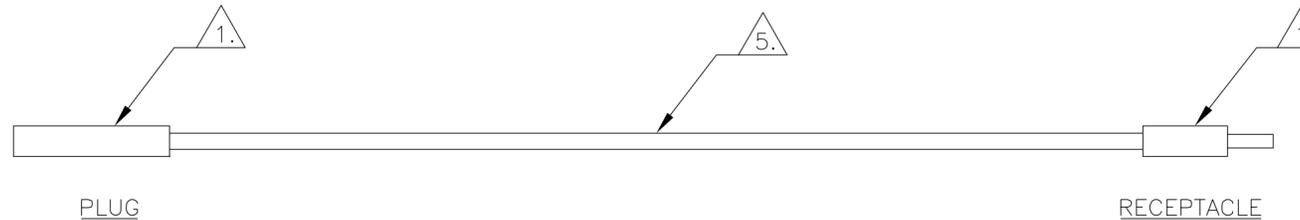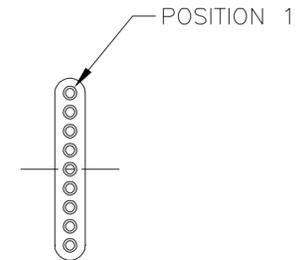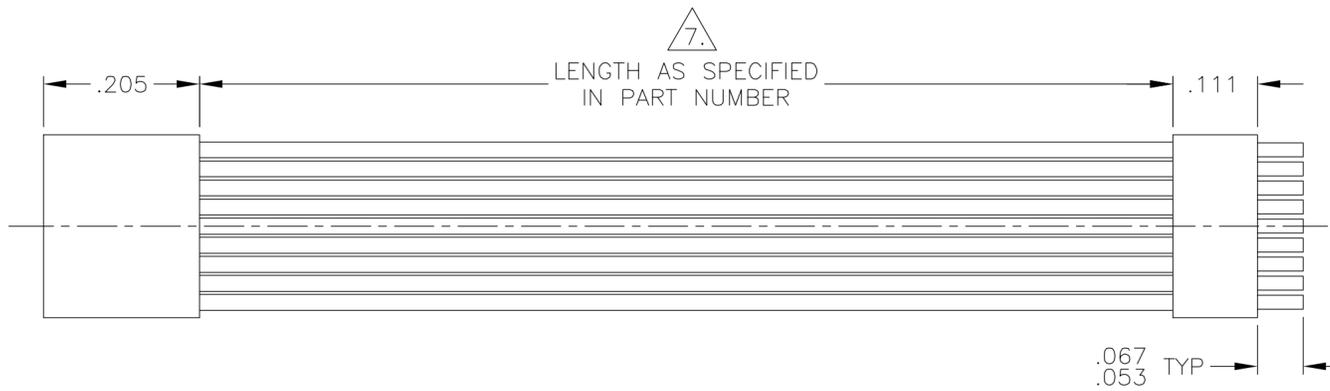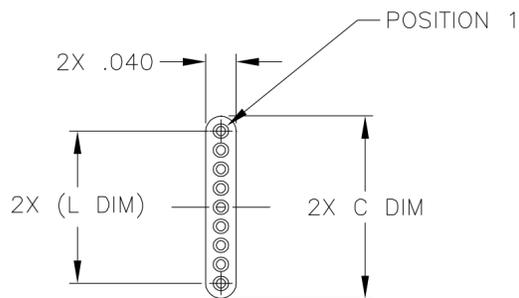

1. INSULATOR MATERIAL: RYTON (POLYPHENYLENE SULFIDE) PER MIL-M-24519 OR LCP PER ASTM D5138
2. OPTIONAL POLARIZATION POSITION SHOWN FOR REFERENCE ONLY. IF POLARIZATION GUIDE POST(S) ARE REQUIRED ON THE MATING PLUG, THE CORRESPONDING LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER. THE CONTACT CAVITY IS LEFT EMPTY FOR ACCEPTANCE OF THE PLUG GUIDE POST AND IS A NON OPERATIONAL CAVITY.
3. OPTIONAL POLARIZATION GUIDE POST SHOWN FOR REFERENCE ONLY. IF GUIDE POST(S) ARE REQUIRED, THE LOCATION MUST BE SPECIFIED IN THE NANONICS PART NUMBER AND IS A NON OPERATIONAL CAVITY. GUIDE POST MATERIAL IS 303 STAINLESS STEEL, PASSIVATED PER SAE-AMS-QQ-P-35.
4. POLARIZING POSITIONS MUST MATCH ON BOTH ENDS OF THE ASSEMBLY.
5. THIS CONFIGURATION MAY BE TERMINATED WITH 28 AWG SOLID, 30 AWG STRANDED OR SMALLER WIRE. CONDUCTOR TYPE AND LENGTH MUST BE SPECIFIED IN NANONICS PART NUMBER.
6. WHEN ORDERING THESE SIZES, FIRST CONSULT TYCO ELECTRONICS/NANONICS FOR ADDITIONAL INFORMATION.
7. LENGTH TOLERANCE: UP TO 25.0 INCHES, $\pm .25$; 25.0 INCHES AND LONGER, $\pm 1\%$
8. PREVIOUSLY IDENTIFIED AS NANONICS 303-0108

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. SCHOLL 05-01-02	Tyco Electronics Corporation Harrisburg, PA 17105
DIMENSIONS: INCHES		CHK M. STORRY 05-01-02	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. MORALES 01-27-04	
0 PLC ± - 1 PLC ± - 2 PLC ± .010 3 PLC ± .005 4 PLC ± - ANGLES ± 1°		PRODUCT SPEC	
MATERIAL SEE NOTES		FINISH SEE NOTES	NAME JUMPER ASSEMBLY, PLUG TO RECEPTACLE, UNSHROUDED STRIP, PLASTIC
SCALE 6:1		SHEET 1 OF 1	RESTRICTED TO

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[USJ015PR3DXC60](#)