



## WIRELESS SBCs ADVANTAGES

- eZ80AcclaimPlus! Flash MCU
- Up to 4 MB Flash Memory
- Up to 1 MB SRAM
- 802.11 b/g Wireless Transceiver
- Software Library
- Preemptive Multitasking OS
- Integrated Peripherals

## TARGET APPLICATIONS

- Home Control
- Fitness Equipment
- Industrial Control
- Smart Appliances
- Medical Devices
- Consumer Electronics

## eZ80AcclaimPlus!™ Wireless Zdots® Single Board Computer

### Overview

Zilog's eZ80AcclaimPlus! Wireless Zdots Single Board Computer (SBC) delivers a complete Wireless solution that can be easily and quickly embedded into a variety of devices to enable the Wireless capability. This fully integrated SBC offers a rich hardware feature set along with a full, royalty-free, web-server software stack, making your Wireless solution development quick, efficient, and cost effective.

### A Fully Integrated, High Performance SBC for Wireless Applications


At the center of this SBC is Zilog's award winning eZ80AcclaimPlus! Microcontroller, featuring a powerful 50 MHz single-cycle instruction fetch eZ80® core with 24-bit ALU, 256 KB of embedded Flash, 16 KB of SRAM and a variety of peripherals including four 16-bit timers, 32-bit GPIO, two UARTs, one SPI, and one I<sup>2</sup>C and support for up to 16 MB of external memory. In addition, the eZ80AcclaimPlus! Wireless Zdots SBC supports up to 4 MB of NOR Flash, up to 1 MB of SRAM, and support for optional serial Flash. The SBC also includes an 802.11 b/g Wireless Transceiver with the integrated onboard antenna and optional external antenna support.

The eZ80AcclaimPlus! Wireless Zdots SBC also comes with a full software library that includes an integrated, preemptive multitasking real time OS that has been optimized for embedded applications, a flexible, configurable TCP/IP stack and an optional SSL plug-in. The software license for this software library is royalty-free.

### eZ80AcclaimPlus!™ Wireless Zdots® Key Feature Summary

- 50 MHz High performance MCU core
- Integrated 256 KB Flash memory and 16 KB SRAM
- Integrated 10/100 Mbps Ethernet MAC for networking and internet connectivity  
(**Note:** PHY is not available on Zdots SBC, but can be connected via the MII interface off the 60-pin connector)
- Flexible ZDI Debug port
- 60-pin connector
- 4x 16-bit Timers/PWM, SPI, I<sup>2</sup>C, and 2x UART
- External memory options on board:
  - 128 KB – 1 MB fast SRAM
  - 2 MB – 4 MB NOR Flash
- Wireless Transceiver supports 802.11 b/g
- Integrated embedded antenna and optional external antenna
- Modular, multitasking RTOS with small footprint
- Scalable and configurable SPI TCP/IP wireless stack
- Optional Network Security Plug-in – SSL for secured data transmission and reception

## eZ80AcclaimPlus!™ Wireless Zdots® Block Diagram

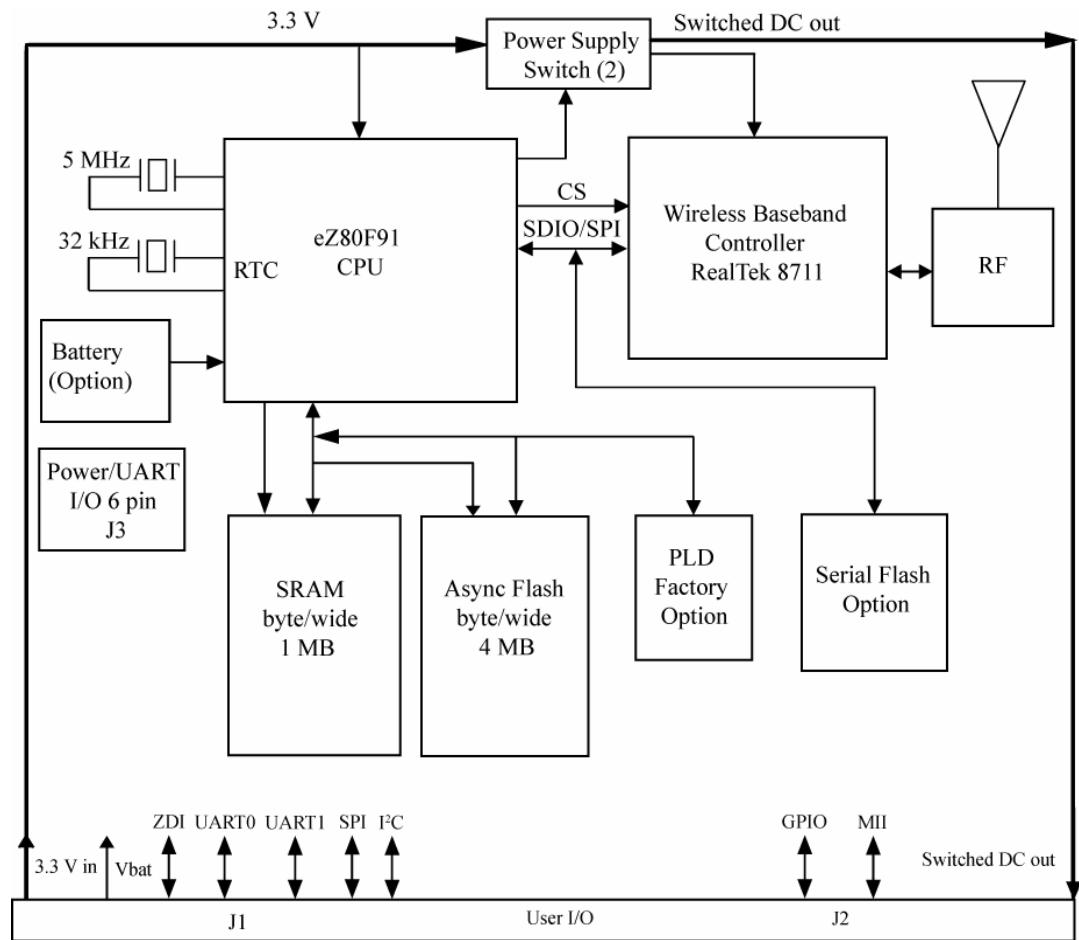

## KEY FEATURES

- eZ80AcclaimPlus! Flash MCU
  - Integrated 256 K Flash
  - Integrated Ethernet MAC
- On-board Flash Memory
- On-board SRAM Memory


## eZ80AcclaimPlus!™ Wireless Zdots® Detailed Feature Set

### eZ80AcclaimPlus!™ Flash Microcontroller

The eZ80AcclaimPlus! MCU operates either in eZ80® compatible (64 KB) mode or full 24-bit (16 MB) linear address mode. With increased clock speed and processor efficiency, the processing power of the eZ80AcclaimPlus! MCU rivals the performance of many 16-bit microprocessors. The eZ80AcclaimPlus! MCU features:

- Dual bank registers for fast context switching
- Block transfer instructions with expanded repeat capability
- High-performance data transfer similar to DMAs

### eZ80AcclaimPlus!™ Silicon Block Diagram

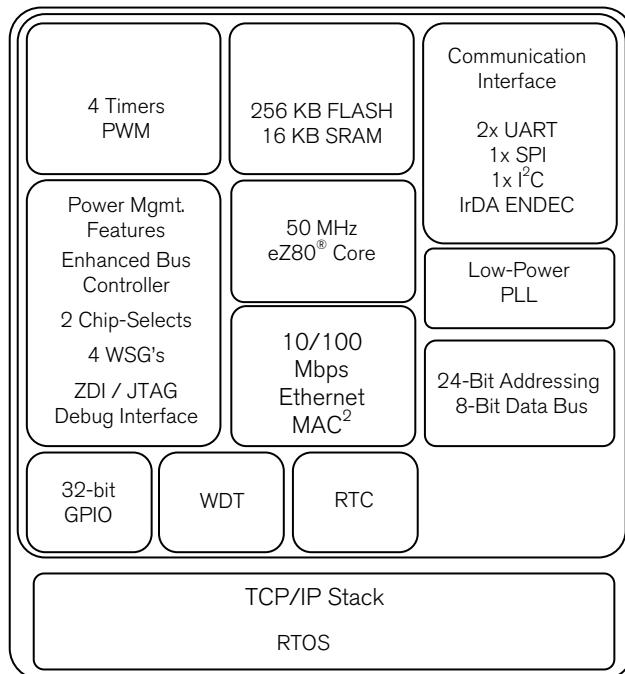

### On-chip Flash Memory

The eZ80AcclaimPlus! MCU features 256 KB of Flash Program Memory and 16 KB of high speed, re-locatable SRAM.

### 10/100 BaseT Ethernet MAC (EMAC)

The eZ80AcclaimPlus!™ Microcontroller has an integrated IEEE 802.3 Ethernet controller with 8 KB of dynamically-configurable Tx/Rx frame buffer. The device supports 10 Mbps and 100 Mbps, full duplex operation, and an industry-standard Media Independent Interface (MII) for simple connection to an external Physical Layer Interface (PHY) device.

**Note:** The PHY is not available on the eZ80AcclaimPlus! Wireless Zdots SBC. For eZ80AcclaimPlus! Ethernet Zdots SBC, please refer to part number eZ80F917050SBCG.

### Zdots® SBC Memory Options

SRAM 128 KB 1 MB

NOR Flash 2 MB 4 MB

## KEY FEATURES

- ZTP - TCP/IP Stack
- RTOS

## eZ80AcclaimPlus!™ Wireless Zdots® Detailed Feature Set (continued...)

### ZTP

Zilog's TCP/IP solution (ZTP) is an integrated, preemptive multitasking OS and TCP/IP protocol software suite optimized for embedded systems. ZTP includes Zilog's RZK RTOS, and works in conjunction with the award winning eZ80AcclaimPlus! product family of Flash microcontrollers to provide standard network connectivity in a wide range of wireless applications. The ZTP software suite is optimized for low cost systems, and offers full-feature operating system services in addition to network services while occupying very little program memory.

The ZTP software suite provides the following features:

- Industry standard, RFC compliant protocols
- Core protocols: IPv4, TCP, UDP, DHCP/BOOTP, ICMP, IGMP, ARP, RARP
- Optional Protocols: SSL server, SNMP V3 and HTTPS
- Interconnects: UART(x2), I<sup>2</sup>C, SPI
- FTP server and client services using an embedded Flash file system supporting multiple disk volumes
- Local or remote runtime debugging OS command shell
- Dynamic memory allocation support
- Selectable Wireless security – no Encryption WEP40 or WEP104
- Wireless discovery and attach APIs

### Zilog RTOS

Zilog's real-time preemptive multitasking kernel, RZK, is designed for time-critical embedded applications. RZK is configurable, scalable, and modular in design; it provides a rich-set of features via easy-to-use and well-documented APIs. Additionally, RZK features are highly optimized to the stringent memory and performance of embedded applications.

## Ordering Information

Order the eZ80Acclaim*Plus!*<sup>TM</sup> silicon, development tools and Wireless Zdots SBC from your local Zilog sales representative by using the part numbers below. For more information, or to download product collateral and/or software, please visit us at [www.zilog.com](http://www.zilog.com).

### eZ80Acclaim*Plus!*<sup>TM</sup> Zdots<sup>®</sup> Single Board Computer (SBC) & Development Kit

Part Number	Description
eZ80F91WF01SBCG	eZ80Acclaim <i>Plus!</i> <sup>TM</sup> Wireless Zdots <sup>®</sup> SBC
eZ80F91WF01ZCOG	eZ80Acclaim <i>Plus!</i> <sup>TM</sup> Wireless Zdots <sup>®</sup> SBC Development Kit

## Documentation

The collateral referenced below is a sample of the documentation available for the eZ80AcclaimPlus! Wireless Zdots Single Board Computer. For a complete listing of all available application notes, product specifications, user manuals, and sample libraries, please visit us at [www.zilog.com](http://www.zilog.com).

---

Document Number	Description
PS0280	eZ80AcclaimPlus!™ Wireless Zdots® Single Board Computer Product Specification

---

The documents associated with ZTP and RZK available for download on [www.zilog.com](http://www.zilog.com) are provided below:

---

Document Number	Description
PB0154	Zilog Full-Feature TCP/IP Software Suite Product Brief
QS0049	Zilog TCP/IP Software Suite Quick Start Guide
RM0041	Zilog TCP/IP Software Suite Programmer's Guide
RM0040	Zilog TCP/IP Stack API Reference Manual
PB0155	Zilog Real-Time Kernel Product Brief
QS0048	Zilog Real-Time Kernel Quick Start Guide
RM0006	Zilog Real-Time Kernel Reference Manual

---



Warning: DO NOT USE IN LIFE SUPPORT

## LIFE SUPPORT POLICY

ZILOG'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS PRIOR WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF ZILOG CORPORATION.

### As used herein

Life support devices or systems are devices which (a) are intended for surgical implant into the body, or (b) support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in a significant injury to the user. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system or to affect its safety or effectiveness.

### Document Disclaimer

©2008 by Zilog, Inc. All rights reserved. Information in this publication concerning the devices, applications, or technology described is intended to suggest possible uses and may be superseded. ZILOG, INC. DOES NOT ASSUME LIABILITY FOR OR PROVIDE A REPRESENTATION OF ACCURACY OF THE INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED IN THIS DOCUMENT. ZILOG ALSO DOES NOT ASSUME LIABILITY FOR INTELLECTUAL PROPERTY INFRINGEMENT RELATED IN ANY MANNER TO USE OF INFORMATION, DEVICES, OR TECHNOLOGY DESCRIBED HEREIN OR OTHERWISE. The information contained within this document has been verified according to the general principles of electrical and mechanical engineering.

eZ80AcclaimPlus!, Zdots, eZ80, and Z80 are trademarks or registered trademarks of Zilog, Inc. All other product or service names are the property of their respective owners.

**zilog**<sup>®</sup>

EMBEDDED IN LIFE  
[WWW.ZILOG.COM](http://WWW.ZILOG.COM) | 408.513.1500

Zilog and the Zilog logo are registered trademarks of Zilog, Inc. in the United States and in other countries.

eZ80AcclaimPlus!, Zdots, eZ80, and Z80 are the trademarks or registered trademarks of Zilog, Inc. All other product or service names are the property of their respective owners. ©Zilog, Inc., 2008. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

ZiLOG:

[EZ80F91WF01ZCOG](#)