

# MAX16033–MAX16040

# Low-Power Battery-Backup Circuits in Small µDFN Packages

## General Description

The MAX16033–MAX16040 supervisory circuits reduce the complexity and number of components required for power-supply monitoring and battery-control functions in microprocessor (µP) systems. The devices significantly improve system reliability and accuracy compared to other ICs or discrete components. The MAX16033–MAX16040 provide µP reset, backup-battery switchover, power-fail warning, watchdog, and chip-enable gating features.

The MAX16033–MAX16040 operate from supply voltages up to 5.5V. The factory-set reset threshold voltage ranges from 2.32V to 4.63V. The devices feature a manual-reset input (MAX16033/MAX16037), a watchdog timer input (MAX16034/MAX16038), a battery-on output (MAX16035/MAX16039), an auxiliary adjustable-reset input (MAX16036/MAX16040), and chip-enable gating (MAX16033–MAX16036). Each device includes a power-fail comparator and offers an active-low push-pull reset or an active-low open-drain reset.

The MAX16033–MAX16040 are available in 2mm x 2mm, 8-pin or 10-pin µDFN packages and are fully specified from -40°C to +85°C.

## Applications

- Portable/Battery-Powered Equipment
- POS Equipment
- Critical µP/µC Power Monitoring
- Set-Top Boxes
- Controllers
- Computers
- Fax Machines
- Industrial Control
- Real-Time Clocks
- Intelligent Instrument

**Pin Configurations and Typical Operating Circuit appear at end of data sheet**

## Selector Guide

| PART      | MR | WATCHDOG | BATTON | RESETIN | CEIN/CEOUT | PFI, PFO | PIN-PACKAGE |
|-----------|----|----------|--------|---------|------------|----------|-------------|
| MAX16033_ | ✓  |          |        |         | ✓          | ✓        | 10 µDFN-10  |
| MAX16034_ |    | ✓        |        |         | ✓          | ✓        | 10 µDFN-10  |
| MAX16035_ |    |          | ✓      |         | ✓          | ✓        | 10 µDFN-10  |
| MAX16036_ |    |          |        | ✓       | ✓          | ✓        | 10 µDFN-10  |
| MAX16037_ | ✓  |          |        |         |            | ✓        | 8 µDFN-8    |
| MAX16038_ |    | ✓        |        |         |            | ✓        | 8 µDFN-8    |
| MAX16039_ |    |          | ✓      |         |            | ✓        | 8 µDFN-8    |
| MAX16040_ |    |          |        | ✓       |            | ✓        | 8 µDFN-8    |

**Note:** Replace “\_” with L for push-pull or P for open-drain RESET and PFO outputs.

## Features

- Low 1.2V Operating Supply Voltage
- Precision Monitoring of 5.0V, 3.3V, 3.0V, and 2.5V Power-Supply Voltages
- Independent Power-Fail Comparator
- Debounced Manual-Reset Input
- Watchdog Timer, 1.6s Timeout
- Battery-On Output Indicator
- Auxiliary User-Adjustable RESETIN
- Low 13µA Quiescent Supply Current
- Two Available Output Structures:  
Active-Low Push-Pull Reset  
Active-Low Open-Drain Reset
- Active-Low Reset Valid Down to 1.2V
- Power-Supply Transient Immunity
- 140ms (min) Reset Timeout Period
- Small 2mm x 2mm, 8-Pin and 10-Pin µDFN Packages

## Ordering Information

| PART*           | TEMP RANGE     | PIN-PACKAGE |
|-----------------|----------------|-------------|
| MAX16033LLB__+T | -40°C to +85°C | 10 µDFN     |
| MAX16033PLB__+T | -40°C to +85°C | 10 µDFN     |
| MAX16034LLB__+T | -40°C to +85°C | 10 µDFN     |
| MAX16034PLB__+T | -40°C to +85°C | 10 µDFN     |

\*These parts offer a choice of reset threshold voltages. From the Reset Threshold Ranges table, insert the desired threshold voltage code in the blank to complete the part number. See the Selector Guide for a listing of device features.

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

Ordering Information continued on last page.

## Absolute Maximum Ratings

Terminal Voltages (with respect to GND)

$V_{CC}$ , BATT, OUT.....-0.3V to +6V  
 $\overline{RESET}$  (open drain),  $\overline{PFO}$  (open drain) .....-0.3V to +6V  
 $\overline{RESET}$  (push-pull),  $\overline{PFO}$  (push-pull), BATTON, RESETIN, WDI  
 MR, CEIN, CEOUT, PFI.....-0.3V to ( $V_{OUT}$  + 0.3V)

Input Current

$V_{CC}$  Peak.....1A  
 $V_{CC}$  Continuous.....250mA  
 BATT Peak.....250mA  
 BATT Continuous.....40mA  
 GND.....75mA

Output Current

OUT.....Short-Circuit Protected for up to 5s  
 $\overline{RESET}$ , BATTON.....20mA  
 Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )  
 8-Pin µDFN (derate 4.8mW/°C above +70°C).....380.6mW  
 10-Pin µDFN (derate 5mW/°C above +70°C).....402.8mW  
 Operating Temperature Range .....-40°C to +85°C  
 Storage Temperature Range .....-65°C to +150°C  
 Lead Temperature (soldering, 10s) .....+300°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## Electrical Characteristics

( $V_{CC} = 2.25\text{V}$  to  $5.5\text{V}$ ,  $V_{BATT} = 3\text{V}$ ,  $\overline{RESET}$  not asserted,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ , for MAX16039PLA31+T,  $T_A = -55^\circ\text{C}$  to  $+85^\circ\text{C}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                             | SYMBOL                | CONDITIONS                                                                  |                                                     | MIN               | TYP | MAX   | UNITS |
|---------------------------------------|-----------------------|-----------------------------------------------------------------------------|-----------------------------------------------------|-------------------|-----|-------|-------|
| Operating Voltage Range               | $V_{CC}$ , $V_{BATT}$ | No load (Note 2)                                                            |                                                     | 0                 |     | 5.5   | V     |
| Supply Current                        | $I_{CC}$              | No load, $V_{CC} > V_{TH}$                                                  | $V_{CC} = 2.8\text{V}$                              |                   | 13  | 30    | µA    |
|                                       |                       |                                                                             | $V_{CC} = 3.6\text{V}$                              |                   | 16  | 35    |       |
|                                       |                       |                                                                             | $V_{CC} = 5.5\text{V}$                              |                   | 22  | 50    |       |
| Supply Current in Battery Backup Mode |                       | $V_{BATT} = 2.8\text{V}$ ,<br>$V_{CC} = 0\text{V}$ ,<br>excluding $I_{OUT}$ | $T_A = +25^\circ\text{C}$                           |                   |     | 1     | µA    |
|                                       |                       |                                                                             | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$    |                   |     | 2     |       |
|                                       |                       |                                                                             | $T_A = -55^\circ\text{C}$<br>(MAX16039PLA31+T only) |                   |     | 10    |       |
| BATT Standby Current (Note 3)         | $I_{BATT}$            | $(V_{BATT} + 0.2\text{V}) < V_{CC}$<br>< 5.5V                               | $T_A = +25^\circ\text{C}$                           | -0.1              |     | +0.02 | µA    |
|                                       |                       |                                                                             | $T_A = -40^\circ\text{C}$ to $+85^\circ\text{C}$    | -0.3              |     | +0.02 |       |
| $V_{CC}$ to OUT On-Resistance         | $R_{ON}$              | $V_{CC} = 4.75\text{V}$ , $V_{CC} > V_{TH}$ , $I_{OUT} = 150\text{mA}$      |                                                     |                   |     | 3.1   | Ω     |
|                                       |                       | $V_{CC} = 3.15\text{V}$ , $V_{CC} > V_{TH}$ , $I_{OUT} = 65\text{mA}$       |                                                     |                   |     | 3.7   |       |
|                                       |                       | $V_{CC} = 2.5\text{V}$ , $V_{CC} > V_{TH}$ , $I_{OUT} = 25\text{mA}$        |                                                     |                   |     | 4.6   |       |
| Output Voltage in Battery Backup Mode | $V_{OUT}$             | $V_{BATT} = 4.50\text{V}$ , $V_{CC} = 0\text{V}$ , $I_{OUT} = 20\text{mA}$  |                                                     | $V_{BATT} - 0.2$  |     |       | V     |
|                                       |                       | $V_{BATT} = 3.15\text{V}$ , $V_{CC} = 0\text{V}$ , $I_{OUT} = 10\text{mA}$  |                                                     | $V_{BATT} - 0.15$ |     |       |       |
|                                       |                       | $V_{BATT} = 2.5\text{V}$ , $V_{CC} = 0\text{V}$ , $I_{OUT} = 5\text{mA}$    |                                                     | $V_{BATT} - 0.15$ |     |       |       |
| Battery-Switchover Threshold          | $V_{SW}$              | $V_{CC} - V_{BATT}$ ,<br>$V_{CC} < V_{TH}$                                  | $V_{CC}$ rising                                     |                   | 0   |       | mV    |
|                                       |                       |                                                                             | $V_{CC}$ falling                                    |                   | -40 |       |       |

## Electrical Characteristics (continued)

( $V_{CC}$  = 2.25V to 5.5V,  $V_{BATT}$  = 3V,  $\overline{RESET}$  not asserted,  $T_A$  = -40°C to +85°C, for MAX16039PLA31+T,  $T_A$  = -55°C to +85°C, unless otherwise noted. Typical values are at  $T_A$  = +25°C.) (Note 1)

| PARAMETER                            | SYMBOL           | CONDITIONS                                                                                                            |                                                   | MIN                   | TYP   | MAX   | UNITS |
|--------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------|---------------------------------------------------|-----------------------|-------|-------|-------|
| RESET OUTPUT                         |                  |                                                                                                                       |                                                   |                       |       |       |       |
| Reset Threshold                      | V <sub>TH</sub>  | MAX160__L_46                                                                                                          |                                                   | 4.50                  | 4.63  | 4.75  | V     |
|                                      |                  | MAX160__L_44                                                                                                          |                                                   | 4.25                  | 4.38  | 4.50  |       |
|                                      |                  | MAX160__L_31                                                                                                          |                                                   | 3.00                  | 3.08  | 3.15  |       |
|                                      |                  | MAX160__L_29                                                                                                          |                                                   | 2.85                  | 2.93  | 3.00  |       |
|                                      |                  | MAX160__L_26                                                                                                          |                                                   | 2.55                  | 2.63  | 2.70  |       |
|                                      |                  | MAX160__L_23                                                                                                          |                                                   | 2.25                  | 2.32  | 2.38  |       |
| V <sub>CC</sub> Falling Reset Delay  |                  | V <sub>CC</sub> falling at 10V/ms                                                                                     |                                                   | 25                    |       |       | µs    |
| Reset Active Timeout Period          | t <sub>RP</sub>  |                                                                                                                       |                                                   | 140                   |       | 280   | ms    |
| RESET Output Low Voltage             | V <sub>OL</sub>  | RESET asserted                                                                                                        | I <sub>SINK</sub> = 1.6mA, V <sub>CC</sub> ≥ 2.1V |                       |       | 0.3   | V     |
|                                      |                  |                                                                                                                       | I <sub>SINK</sub> = 100µA, V <sub>CC</sub> ≥ 1.2V |                       |       | 0.4   |       |
| RESET Output High Voltage            | V <sub>OH</sub>  | MAX160__L only (push-pull), RESET not asserted, I <sub>SOURCE</sub> = 500µA, V <sub>CC</sub> ≥ V <sub>TH</sub> (MAX)  |                                                   | 0.8 x V <sub>CC</sub> |       |       | V     |
| RESET Output Leakage Current         | I <sub>LKG</sub> | MAX160__P only (open drain), not asserted                                                                             |                                                   |                       |       | 1     | µA    |
| POWER-FAIL COMPARATOR                |                  |                                                                                                                       |                                                   |                       |       |       |       |
| PFI Input Threshold                  | V <sub>PFI</sub> | V <sub>PFI</sub> falling                                                                                              |                                                   | 1.185                 | 1.235 | 1.285 | V     |
| PFI Hysteresis                       |                  |                                                                                                                       |                                                   | 1                     |       |       | %     |
| PFI Input Current                    |                  | V <sub>PFI</sub> = 0V or V <sub>CC</sub>                                                                              |                                                   | -100                  |       | +100  | nA    |
| PFO Output Low Voltage               | V <sub>OL</sub>  | Output asserted                                                                                                       | V <sub>CC</sub> ≥ 2.1V, I <sub>SINK</sub> = 1.6mA |                       |       | 0.3   | V     |
|                                      |                  |                                                                                                                       | V <sub>CC</sub> ≥ 1.2V, I <sub>SINK</sub> = 100µA |                       |       | 0.4   |       |
| PFO Output High Voltage              | V <sub>OH</sub>  | MAX160__L only (push-pull), V <sub>CC</sub> ≥ V <sub>TH</sub> (MAX), I <sub>SOURCE</sub> = 500µA, output not asserted |                                                   | 0.8 x V <sub>CC</sub> |       |       | V     |
| PFO Leakage Current                  |                  | MAX160__P only (open drain), V <sub>PFO</sub> = 5.5V, not asserted                                                    |                                                   |                       |       | 1     | µA    |
| PFO Delay Time                       |                  | V <sub>PFI</sub> + 100mV to V <sub>PFI</sub> - 100mV                                                                  |                                                   | 4                     |       |       | µs    |
| MANUAL RESET (MAX16033/MAX16037)     |                  |                                                                                                                       |                                                   |                       |       |       |       |
| MR Input Voltage                     | V <sub>IL</sub>  |                                                                                                                       |                                                   | 0.3 x V <sub>CC</sub> |       | V     |       |
|                                      | V <sub>IH</sub>  |                                                                                                                       |                                                   | 0.7 x V <sub>CC</sub> |       |       |       |
| Pullup Resistance to V <sub>CC</sub> |                  |                                                                                                                       |                                                   | 20                    |       | 165   | kΩ    |
| Minimum Pulse Width                  |                  |                                                                                                                       |                                                   | 1                     |       |       | µs    |
| Glitch Immunity                      |                  | V <sub>CC</sub> = 3.3V                                                                                                |                                                   | 100                   |       |       | ns    |
| MR to Reset Delay                    |                  |                                                                                                                       |                                                   | 120                   |       |       | ns    |

**Electrical Characteristics (continued)**

( $V_{CC}$  = 2.25V to 5.5V,  $V_{BATT}$  = 3V,  $\overline{RESET}$  not asserted,  $T_A$  = -40°C to +85°C, for MAX16039PLA31+T,  $T_A$  = -55°C to +85°C, unless otherwise noted. Typical values are at  $T_A$  = +25°C.) (Note 1)

| PARAMETER                                | SYMBOL           | CONDITIONS                                                                                                                    | MIN                     | TYP   | MAX   | UNITS |
|------------------------------------------|------------------|-------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------|-------|-------|
| WATCHDOG (MAX16034/MAX16038)             |                  |                                                                                                                               |                         |       |       |       |
| Watchdog Timeout Period                  | t <sub>WD</sub>  |                                                                                                                               | 1.00                    | 1.65  | 2.25  | s     |
| Minimum WDI Input Pulse Width            | t <sub>WDI</sub> | (Note 4)                                                                                                                      | 100                     |       |       | ns    |
| WDI Input Voltage                        | V <sub>IL</sub>  |                                                                                                                               | 0.3 x V <sub>CC</sub>   |       |       | V     |
|                                          | V <sub>IH</sub>  |                                                                                                                               | 0.7 x V <sub>CC</sub>   |       |       |       |
| WDI Input Current                        |                  |                                                                                                                               | -1.0                    |       | +1.0  | µA    |
| BATTON (MAX16035/MAX16039)               |                  |                                                                                                                               |                         |       |       |       |
| Output Voltage                           | V <sub>OL</sub>  | I <sub>SINK</sub> = 3.2mA, V <sub>BATT</sub> = 2.1V                                                                           |                         |       | 0.4   | V     |
| Output Short-Circuit Current             |                  | Sink current, V <sub>CC</sub> = 5V                                                                                            |                         | 60    |       | mA    |
|                                          |                  | Source current, V <sub>BATT</sub> ≥ 2V                                                                                        | 10                      | 30    | 120   | µA    |
| RESETIN (MAX16036/MAX16040)              |                  |                                                                                                                               |                         |       |       |       |
| RESETIN Threshold                        | V <sub>RTH</sub> |                                                                                                                               | 1.185                   | 1.235 | 1.285 | V     |
| RESETIN Input Current                    |                  |                                                                                                                               |                         | 0.01  | 25    | nA    |
| RESETIN to Reset Delay                   |                  | (V <sub>RTH</sub> + 100mV) to (V <sub>RTH</sub> - 100mV)                                                                      |                         | 1.5   |       | µs    |
| CHIP-ENABLE GATING (MAX16033–MAX16036)   |                  |                                                                                                                               |                         |       |       |       |
| CEIN Leakage Current                     |                  | RESET asserted                                                                                                                |                         |       | ±1    | µA    |
| CEIN to CEOUT Resistance                 |                  | RESET not asserted, V <sub>CC</sub> = V <sub>TH</sub> (MAX), V <sub>CEIN</sub> = V <sub>CC</sub> /2, I <sub>SINK</sub> = 10mA |                         |       | 100   | Ω     |
| CEOUT Short-Circuit Current              |                  | RESET asserted, V <sub>CEOUT</sub> = 0V                                                                                       |                         | 1     | 2.0   | mA    |
| CEIN to CEOUT Propagation Delay (Note 4) |                  | 50Ω source impedance driver, C <sub>LOAD</sub> = 50pF                                                                         | V <sub>CC</sub> = 4.75V | 1.5   | 7     | ns    |
|                                          |                  |                                                                                                                               | V <sub>CC</sub> = 3.15V | 2     | 9     |       |
| CEOUT Output-Voltage High                |                  | V <sub>CC</sub> = 5V, V <sub>CC</sub> ≥ V <sub>BATT</sub> , I <sub>SOURCE</sub> = 100µA                                       | 0.7 x V <sub>CC</sub>   |       |       | V     |
|                                          |                  | V <sub>CC</sub> = 0V, V <sub>BATT</sub> ≥ 2.2V, I <sub>SOURCE</sub> = 1µA                                                     | V <sub>BATT</sub> - 0.1 |       |       |       |
| RESET to CEOUT Delay                     |                  |                                                                                                                               |                         | 1     |       | µs    |

**Note 1:** All devices are 100% production tested at  $T_A$  = +25°C. All overtemperature limits are guaranteed by design.


**Note 2:**  $V_{BATT}$  can be 0V any time, or  $V_{CC}$  can go down to 0V if  $V_{BATT}$  is active (except at startup).

**Note 3:** Positive current flows into BATT.

**Note 4:** Guaranteed by design.


## Typical Operating Characteristics

(TA = +25°C, unless otherwise noted.)

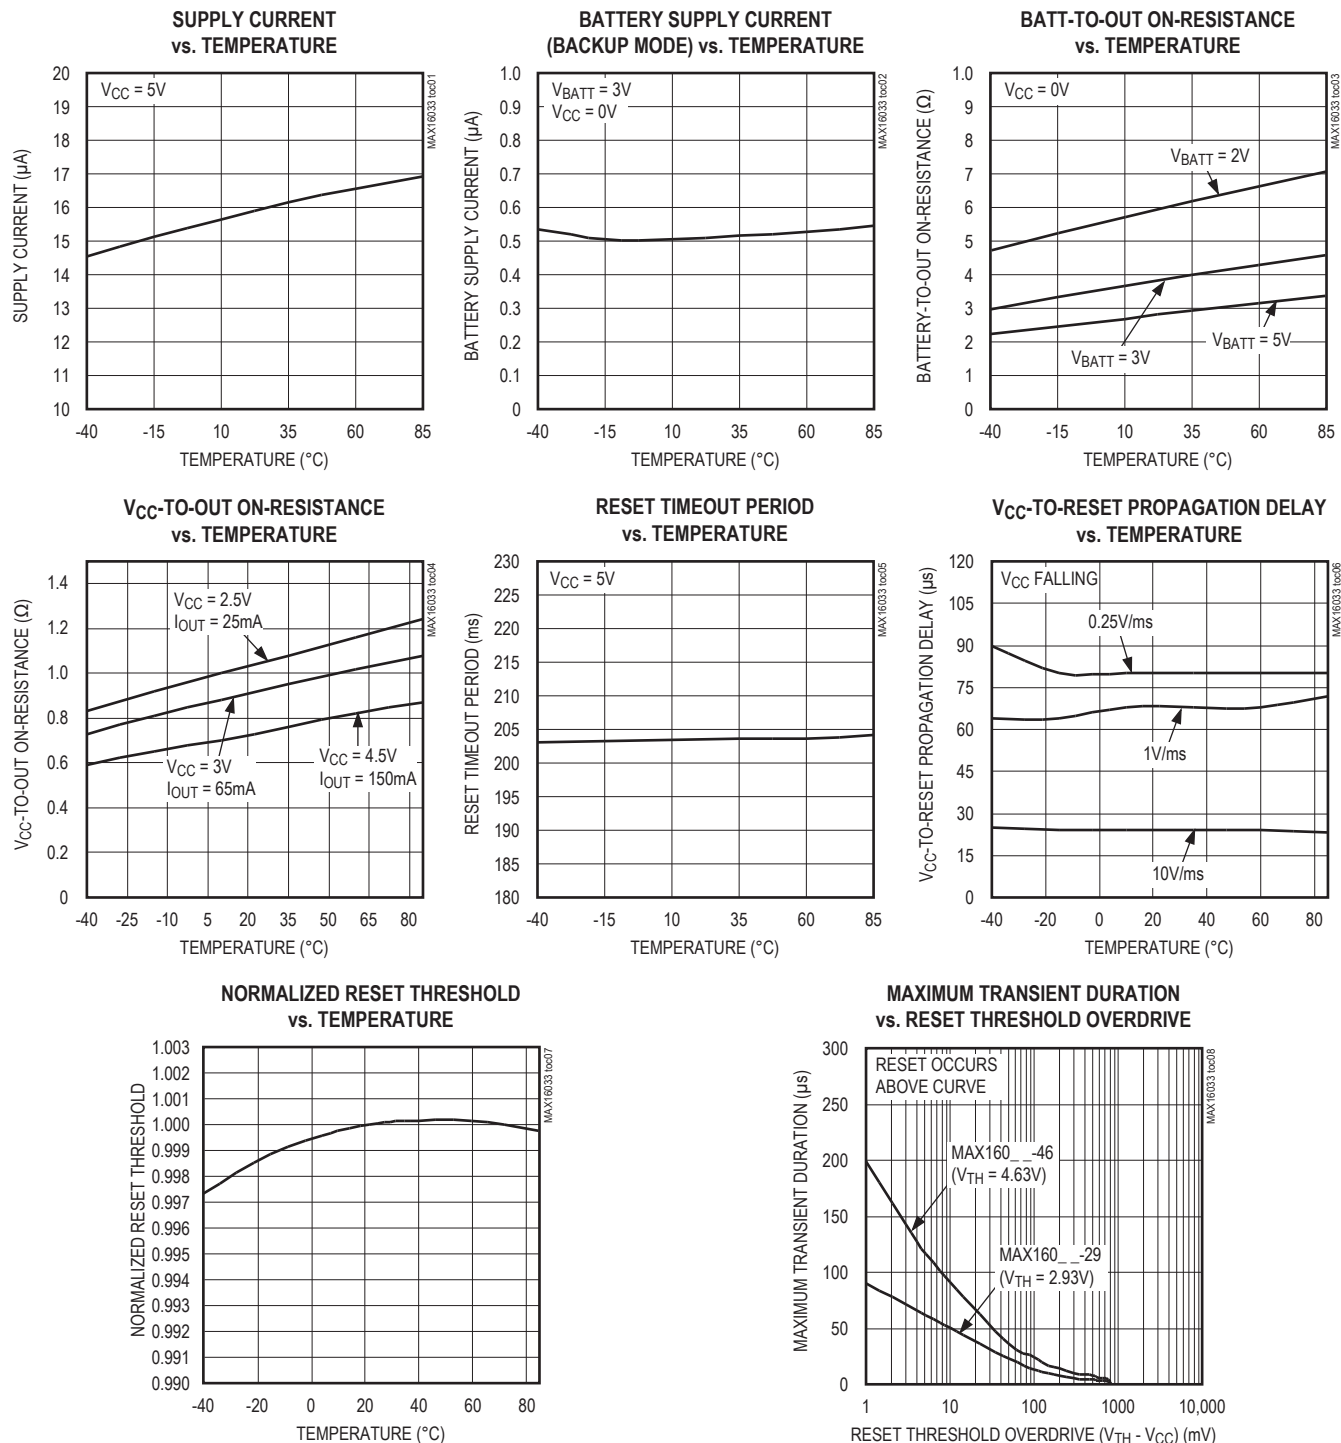

## Typical Operating Characteristics (continued)


(TA = +25°C, unless otherwise noted.)

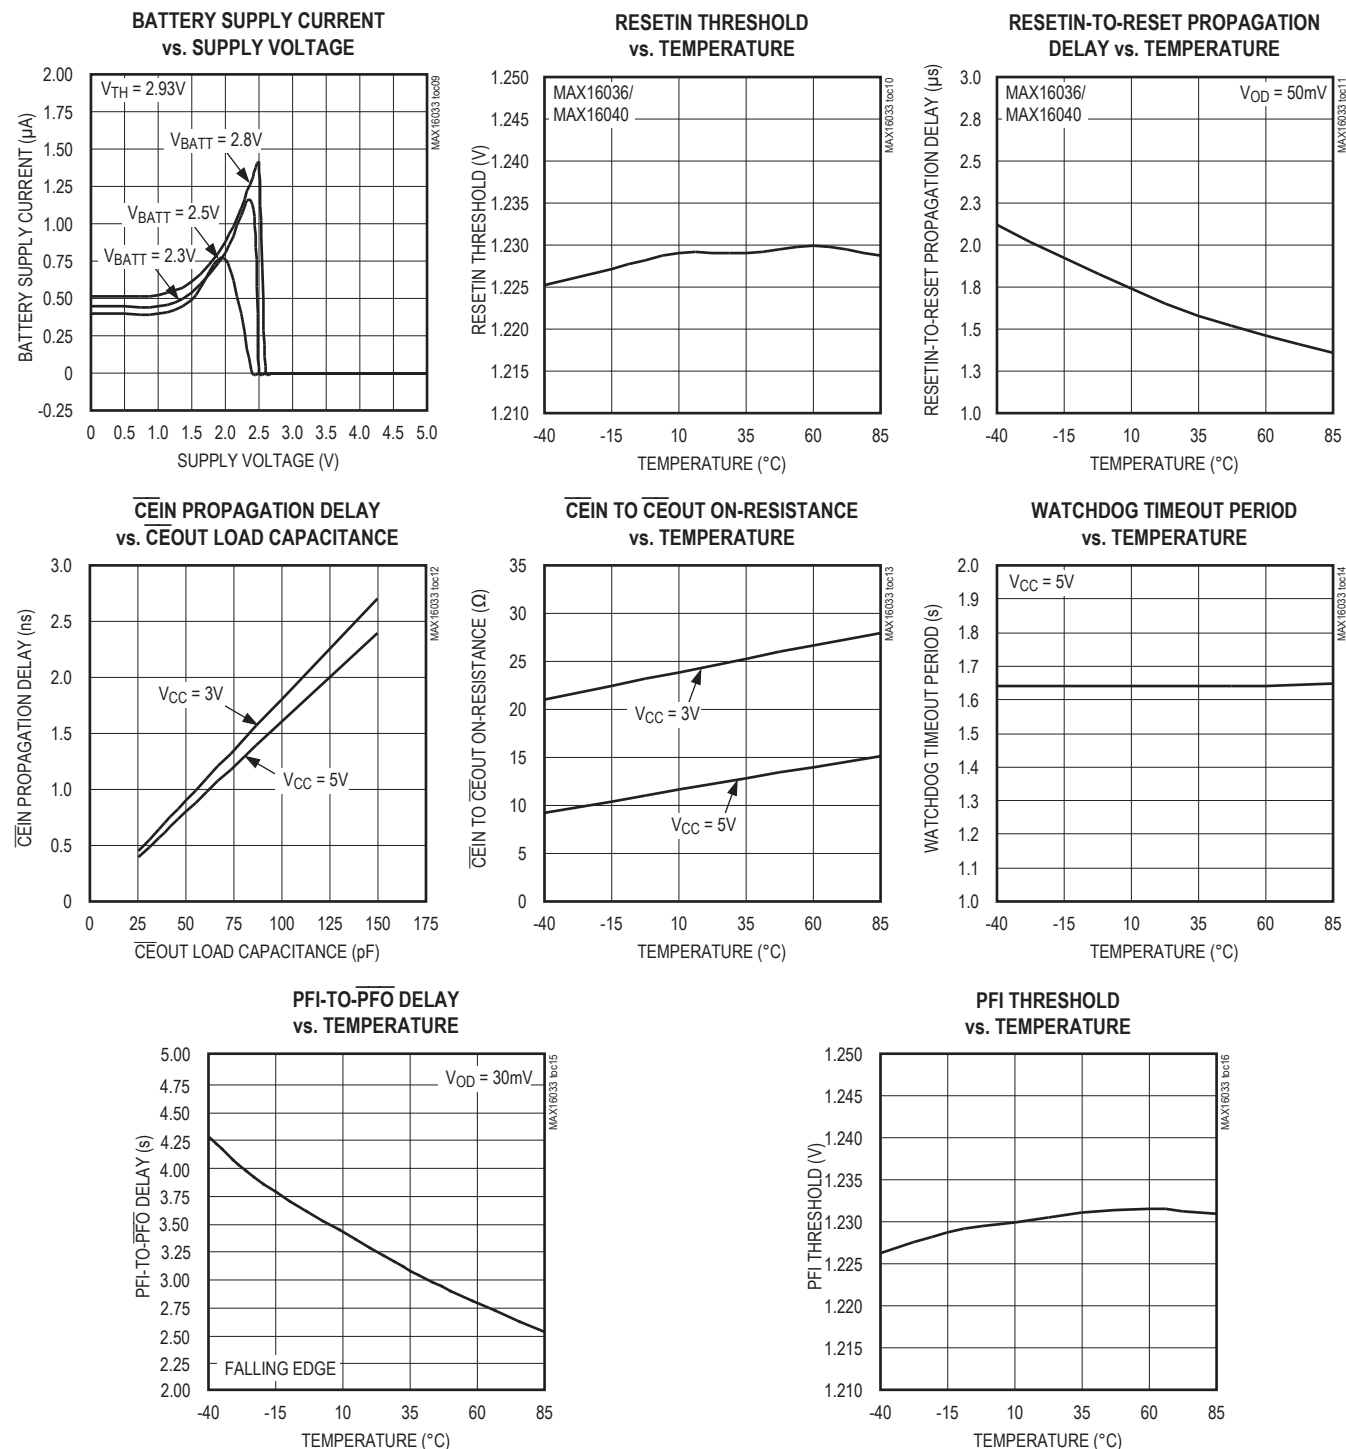

## Pin Description

| PIN                                    |                                       | NAME                      | FUNCTION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|----------------------------------------|---------------------------------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MAX16033–<br>MAX16036<br>(10-pin µDFN) | MAX16037–<br>MAX16040<br>(8-pin µDFN) |                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| 1                                      | 1                                     | $\overline{\text{RESET}}$ | Active-Low Reset Output. $\overline{\text{RESET}}$ remains low when $V_{\text{CC}}$ is below the reset threshold ( $V_{\text{TH}}$ ), the manual-reset input is low, or RESETIN is low. It asserts low in pulses when the internal watchdog times out. $\overline{\text{RESET}}$ remains low for the reset timeout period ( $t_{\text{RP}}$ ) after $V_{\text{CC}}$ rises above the reset threshold, after the manual-reset input goes from low to high, after RESETIN goes high, or after the watchdog triggers a reset event. The MAX160_ _L is an active-low push-pull output, while the MAX160_ _P is an active-low open-drain output. |
| 2                                      | —                                     | $\overline{\text{CEIN}}$  | Chip-Enable Input. The input to the chip-enable gating circuit. Connect to GND or OUT if not used.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 3                                      | 2                                     | PFI                       | Power-Fail Input. $\overline{\text{PFO}}$ goes low when $V_{\text{PFI}}$ falls below 1.235V.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 4                                      | 3                                     | GND                       | Ground                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 5                                      | 4                                     | $\overline{\text{MR}}$    | Manual-Reset Input (MAX16033/MAX16037). Driving $\overline{\text{MR}}$ low asserts $\overline{\text{RESET}}$ . $\overline{\text{RESET}}$ remains asserted as long as $\overline{\text{MR}}$ is low and for the reset timeout period ( $t_{\text{RP}}$ ) after $\overline{\text{MR}}$ transitions from low to high. Leave unconnected, or connect to $V_{\text{CC}}$ if not used. $\overline{\text{MR}}$ has an internal 20kΩ pullup to $V_{\text{CC}}$ .                                                                                                                                                                                   |
|                                        |                                       | WDI                       | Watchdog Input (MAX16034/MAX16038). If WDI remains high or low for longer than the watchdog timeout period ( $t_{\text{WD}}$ ), the internal watchdog timer runs out and a reset pulse is triggered for the reset timeout period ( $t_{\text{RP}}$ ). The internal watchdog clears whenever $\overline{\text{RESET}}$ asserts or whenever WDI sees a rising or falling edge (Figure 2).                                                                                                                                                                                                                                                    |
|                                        |                                       | BATTON                    | Battery-On Output (MAX16035/MAX16039). BATTON goes high during battery backup mode.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                                        |                                       | RESETIN                   | Reset Input (MAX16036/MAX16040). When RESETIN falls below 1.235V, $\overline{\text{RESET}}$ asserts. $\overline{\text{RESET}}$ remains asserted as long as RESETIN is low and for at least $t_{\text{RP}}$ after RESETIN goes high.                                                                                                                                                                                                                                                                                                                                                                                                        |
| 6                                      | 5                                     | $\overline{\text{PFO}}$   | Active-Low Power-Fail Output. $\overline{\text{PFO}}$ goes low when $V_{\text{PFI}}$ falls below 1.235V. $\overline{\text{PFO}}$ stays low until $V_{\text{PFI}}$ goes above 1.235V. $\overline{\text{PFO}}$ also goes low when $V_{\text{CC}}$ falls below the reset threshold voltage.                                                                                                                                                                                                                                                                                                                                                   |
| 7                                      | 6                                     | $V_{\text{CC}}$           | Supply Voltage, 1.2V to 5.5V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| 8                                      | 7                                     | OUT                       | Output. OUT sources from $V_{\text{CC}}$ when $\overline{\text{RESET}}$ is not asserted and from the greater of $V_{\text{CC}}$ or BATT when $V_{\text{CC}}$ is below the reset threshold voltage.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| 9                                      | 8                                     | BATT                      | Backup-Battery Input. When $V_{\text{CC}}$ falls below the reset threshold, OUT switches to BATT if $V_{\text{BATT}}$ is 40mV greater than $V_{\text{CC}}$ . When $V_{\text{CC}}$ rises above $V_{\text{BATT}}$ , OUT switches to $V_{\text{CC}}$ . The 40mV hysteresis prevents repeated switching if $V_{\text{CC}}$ falls slowly.                                                                                                                                                                                                                                                                                                       |
| 10                                     | —                                     | $\overline{\text{CEOUT}}$ | Chip-Enable Output. $\overline{\text{CEOUT}}$ goes low only when $\overline{\text{CEIN}}$ is low and reset is not asserted. When $\overline{\text{CEOUT}}$ is disconnected from $\overline{\text{CEIN}}$ , $\overline{\text{CEOUT}}$ is actively pulled up to OUT.                                                                                                                                                                                                                                                                                                                                                                         |

## Pin Description (continued)

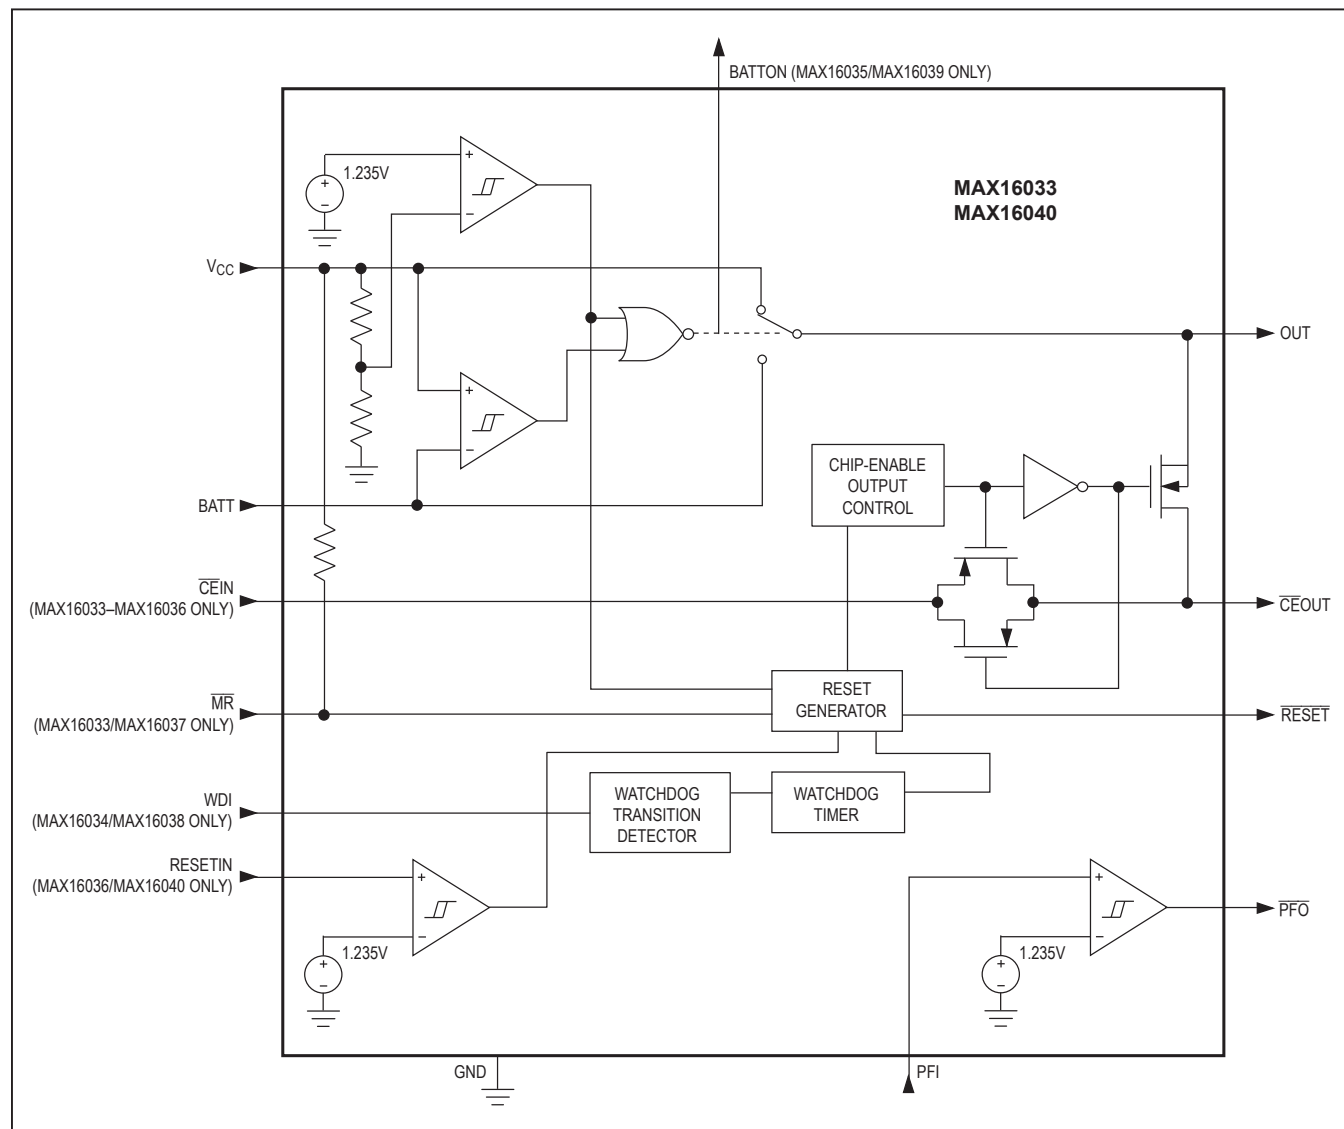

## Detailed Description

The *Typical Operating Circuit* shows a typical connection for the MAX16033–MAX16040. OUT powers the static random-access memory (SRAM). If  $V_{CC}$  is greater than the reset threshold ( $V_{TH}$ ), or if  $V_{CC}$  is lower than  $V_{TH}$  but higher than  $V_{BATT}$ ,  $V_{CC}$  is connected to OUT. If  $V_{CC}$  is lower than  $V_{TH}$  and  $V_{CC}$  is less than  $V_{BATT}$ , BATT is connected to OUT. OUT supplies up to 200mA from  $V_{CC}$ . In battery-backup mode, an internal MOSFET connects the backup battery to OUT. The on-resistance of the MOSFET is a function of the backup-battery voltage and temperature and is shown in the BATT-to-OUT On-Resistance vs. Temperature graph in the *Typical Operating Characteristics*.

### Chip-Enable Signal Gating (MAX16033–MAX16036 Only)

The MAX16033–MAX16036 provide internal gating of chip-enable ( $\overline{CE}$ ) signals to prevent erroneous data from being written to CMOS RAM in the event of a power failure or brownout condition. During normal operation, the  $\overline{CE}$  gate is enabled and passes all  $\overline{CE}$  transitions. When reset asserts, this path becomes disabled, preventing erroneous data from corrupting the CMOS RAM. The MAX16033–MAX16036 provide a series transmission gate from  $\overline{CEIN}$  to  $\overline{CEOUT}$ . A 2ns (typ) propagation delay

from  $\overline{CEIN}$  to  $\overline{CEOUT}$  allows these devices to be used with most  $\mu$ Ps and high-speed DSPs.

When  $\overline{RESET}$  is deasserted,  $\overline{CEIN}$  is connected to  $\overline{CEOUT}$  through a low on-resistance transmission gate. If  $\overline{CEIN}$  is high when  $\overline{RESET}$  is asserted,  $\overline{CEOUT}$  remains high regardless of any subsequent transitions on  $\overline{CEIN}$  during the reset event.

If  $\overline{CEIN}$  is low when  $\overline{RESET}$  is asserted,  $\overline{CEOUT}$  is held low for 1 $\mu$ s to allow completion of the read/write operation (Figure 1). After the 1 $\mu$ s delay expires,  $\overline{CEOUT}$  goes high and stays high regardless of any subsequent transitions on  $\overline{CEIN}$  during the reset event. When  $\overline{CEOUT}$  is disconnected from  $\overline{CEIN}$ ,  $\overline{CEOUT}$  is actively pulled up to OUT.

The propagation delay through the chip-enable circuitry depends on both the source impedance of the drive to  $\overline{CEIN}$  and the capacitive loading at  $\overline{CEOUT}$ . The chip-enable propagation delay is specified from the 50% point of  $\overline{CEIN}$  to the 50% point of  $\overline{CEOUT}$ , using a 50 $\Omega$  driver and 50pF load capacitance. Minimize the capacitive load at  $\overline{CEOUT}$  and use a low output-impedance driver to minimize propagation delay.

In high-impedance mode, the leakage current at  $\overline{CEIN}$  is  $\pm 1\mu$ A (max) over temperature. In low-impedance mode, the impedance of  $\overline{CEIN}$  appears as a 75 $\Omega$  resistor in series with the load at  $\overline{CEOUT}$ .

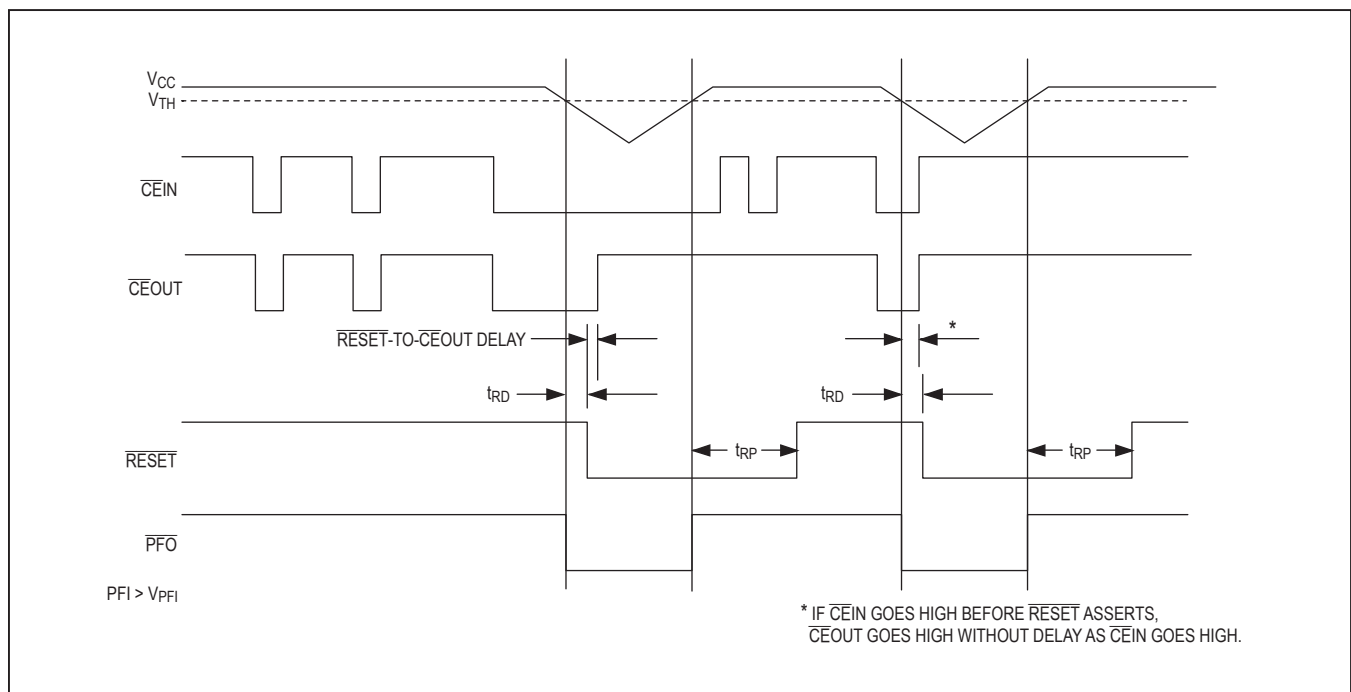


Figure 1.  $\overline{RESET}$  and Chip-Enable Timing

**Backup-Battery Switchover**

To preserve the contents of the RAM in a brownout or power failure, the MAX16033–MAX16040 automatically switch to back up the battery installed at BATT when the following two conditions are met:

- 1)  $V_{CC}$  falls below the reset threshold voltage.
- 2)  $V_{CC}$  is below  $V_{BATT}$ .

Table 1 lists the status of the inputs and outputs in battery-backup mode. The devices do not power up if the only voltage source is  $V_{BATT}$ . OUT only powers up from  $V_{CC}$  at startup.

**Table 1. Input and Output Status in Battery-Backup Mode**

| PIN                                      | STATUS                                                                                                                                    |
|------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{CC}$                                 | Disconnected from OUT                                                                                                                     |
| OUT                                      | Connected to BATT                                                                                                                         |
| BATT                                     | Connected to OUT. Current drawn from the battery is less than $1\mu A$ (at $V_{BATT} = 2.8V$ , excluding $I_{OUT}$ ) when $V_{CC} = 0V$ . |
| RESET                                    | Asserted                                                                                                                                  |
| BATTON                                   | High state                                                                                                                                |
| $\overline{MR}$ , RESETIN, CEIN, and WDI | Inputs ignored                                                                                                                            |
| $\overline{CEOUT}$                       | Connected to OUT                                                                                                                          |
| $\overline{PFO}$                         | Asserted                                                                                                                                  |

**Manual-Reset Input  
(MAX16033/MAX16037 Only)**

Many µP-based products require manual-reset capability, allowing the user or external logic circuitry to initiate a reset. For the MAX16033/MAX16037, a logic-low on  $\overline{MR}$  asserts RESET. RESET remains asserted while  $\overline{MR}$  is low and for a minimum of 140ms ( $t_{RP}$ ) after it returns

high.  $\overline{MR}$  has an internal 20kΩ (min) pullup resistor to  $V_{CC}$ . This input can be driven from TTL/CMOS logic outputs or with open-drain/collector outputs. Connect a normally open momentary switch from  $\overline{MR}$  to GND to create a manual-reset function; external debounce circuitry is not required. When driving  $\overline{MR}$  from long cables, or when using the device in a noisy environment, connect a 0.1µF capacitor from  $\overline{MR}$  to GND to provide additional noise immunity.

**Watchdog Input  
(MAX16034/MAX16038 Only)**

The watchdog monitors µP activity through the watchdog input (WDI). RESET asserts when the µP fails to toggle WDI. Connect WDI to a bus line or µP I/O line. A change of state (high to low, low to high, or a minimum 100ns pulse) resets the watchdog timer. If WDI remains high or low for longer than the watchdog timeout period ( $t_{WD}$ ), the internal watchdog timer runs out and triggers a reset pulse for the reset timeout period ( $t_{RP}$ ). The internal watchdog timer clears whenever RESET is asserted or whenever WDI sees a rising or falling edge. If WDI remains in either a high or low state, a reset pulse periodically asserts after every watchdog timeout period ( $t_{WD}$ ); see Figure 2.

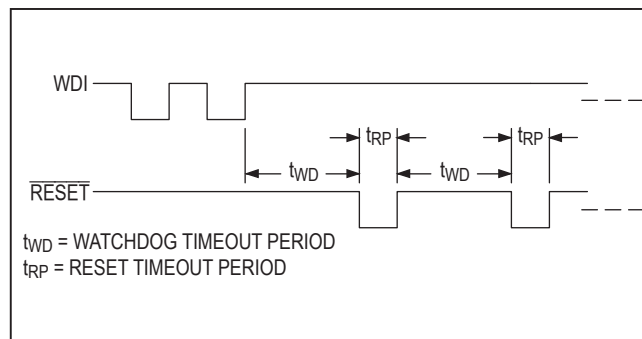


**Figure 2. MAX16034/MAX16038 Watchdog Timeout Period and Reset Active Time**

**BATTON Indicator  
(MAX16035/MAX16039 Only)**

BATTON is a push-pull output that asserts high when in battery-backup mode. BATTON typically sinks 3.2mA at a 0.4V saturation voltage. In battery-backup mode, this terminal sources approximately 10µA from OUT. Use BATTON to indicate battery-switchover status or to supply base drive to an external pass transistor for higher current applications (Figure 3).

**RESETIN Comparator  
(MAX16036/MAX16040 Only)**

An internal 1.235V reference sets the RESETIN threshold voltage. RESET asserts when the voltage at RESETIN is below 1.235V. Use the RESETIN function to monitor a secondary power supply.

Use the following equations to set the reset threshold voltage ( $V_{RTH}$ ) of the secondary power supply (see Figure 4):

$$V_{RTH} = V_{REF} (R1/R2 + 1)$$

where  $V_{REF} = 1.235V$ . To simplify the resistor selection, choose a value for R2 and calculate R1:

$$R1 = R2 [(V_{RTH}/V_{REF}) - 1]$$

Since the input current at RESETIN is 25nA (max), large values (up to 1MΩ) can be used for R2 with no significant loss in accuracy.

**Power-Fail Comparator**

The MAX16033–MAX16040 issue an interrupt (nonmaskable or regular) to the µP when a power failure occurs. The power line is monitored by two external resistors connected to the power-fail input (PFI). When the voltage at PFI falls below 1.235V, the power-fail output ( $\overline{PFO}$ ) drives the processor's NMI input low. An earlier power-fail warning can be generated if the unregulated DC input of the regulator is available for monitoring. The MAX16033–MAX16040 turn off the power-fail comparator and force  $\overline{PFO}$  low when  $V_{CC}$  falls below the reset threshold voltage (Figure 1). The MAX160\_ \_L devices provide push-pull  $\overline{PFO}$  outputs. The MAX160\_ \_P devices provide open-drain  $\overline{PFO}$  outputs.

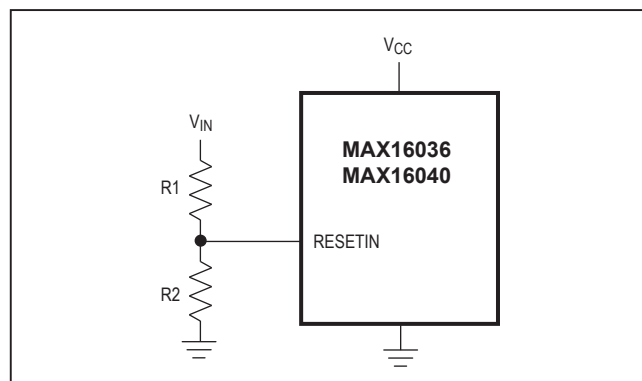


Figure 4. Setting RESETIN Voltage for the MAX16036/MAX16040

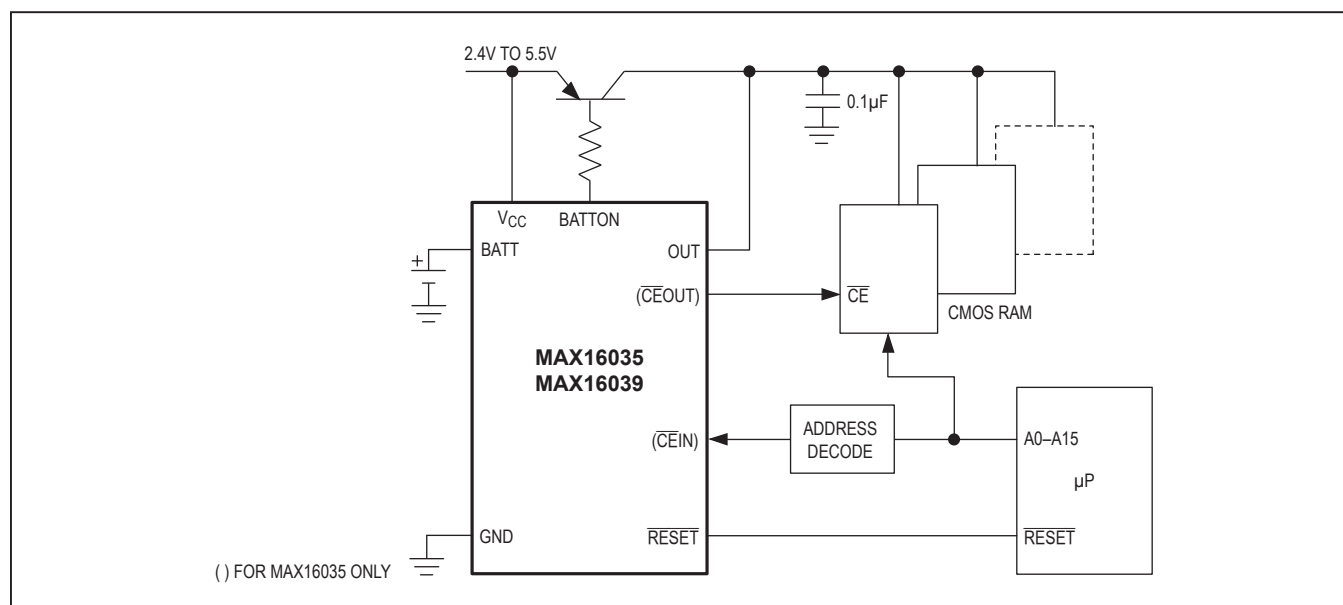


Figure 3. MAX16035/MAX16039 BATTON Driving an External Pass Transistor

## RESET

A  $\mu$ P's reset input puts the  $\mu$ P in a known state. The MAX16033–MAX16040  $\mu$ P supervisory circuits assert a reset to prevent code-execution errors during power-up, power-down, and brownout conditions.  $\overline{\text{RESET}}$  asserts when  $V_{CC}$  is below the reset threshold voltage and for at least 140ms ( $t_{RP}$ ) after  $V_{CC}$  rises above the reset threshold.  $\overline{\text{RESET}}$  also asserts when  $\overline{\text{MR}}$  is low (MAX16033/MAX16037) or when RESETIN is below 1.235V (MAX16036/MAX16040). The MAX16034/MAX16038 watchdog function causes  $\overline{\text{RESET}}$  to assert in pulses following a watchdog timeout (Figure 2). The MAX160\_ \_L devices provide push-pull  $\overline{\text{RESET}}$  outputs. The MAX160\_ \_P devices provide open-drain  $\overline{\text{RESET}}$  outputs.

## Applications Information

### Operation Without a Backup Power Source

The MAX16033–MAX16040 provide a battery-backup function. If a backup power source is not used, connect BATT to GND and OUT to  $V_{CC}$ .

### Using a Super Cap as a Backup Power Source

Super caps are capacitors with extremely high capacitance, such as 0.47F. Figure 5 shows two methods to use a super cap as a backup power source. Connect the super cap through a diode to the 3V input (Figure 5a) or connect the super cap through a diode to 5V (Figure 5b), if a 5V supply is available. The 5V supply charges the super cap to a voltage close to 5V, allowing a longer backup period. Since  $V_{BATT}$  can be higher than  $V_{CC}$  while  $V_{CC}$  is above the reset threshold voltage, there are no special precautions required when using these  $\mu$ P supervisors with a super cap.

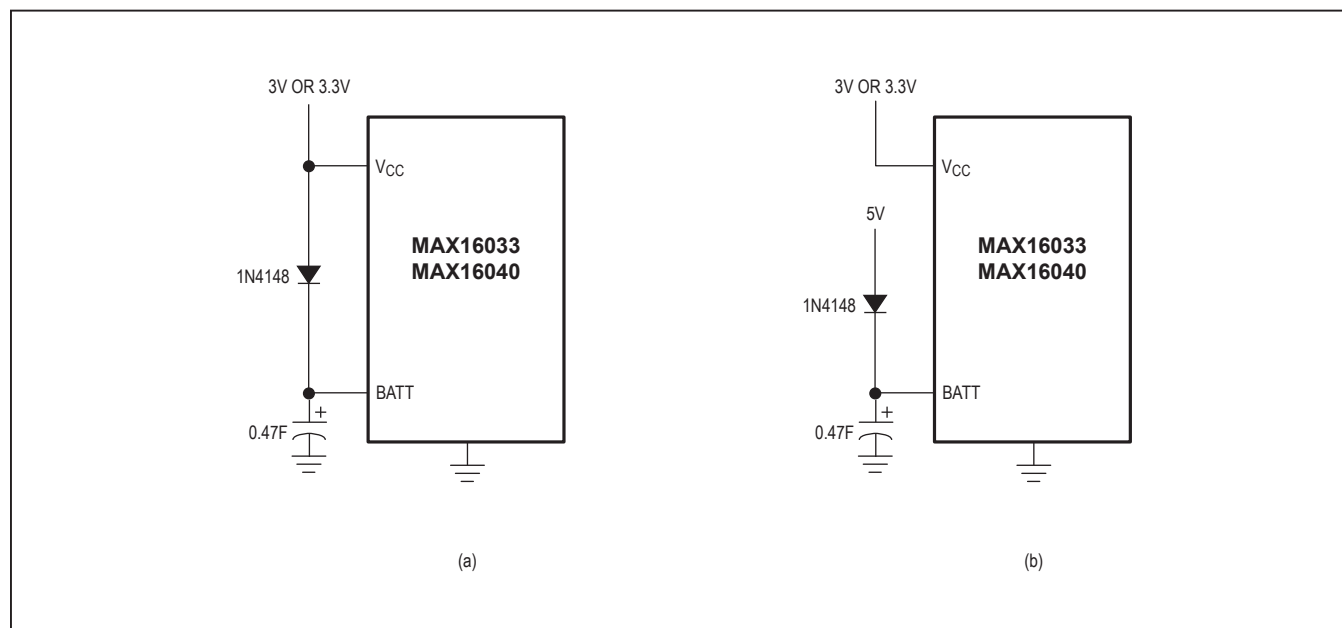


Figure 5. Using a Super Cap as a Backup Source

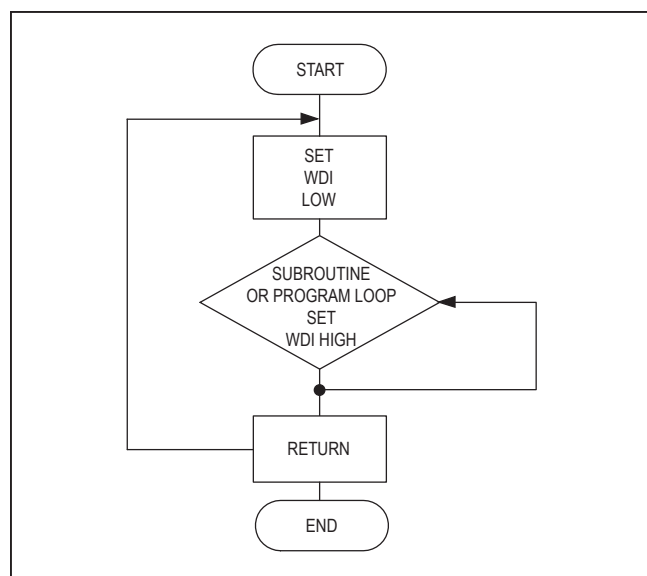


Figure 6. Watchdog Flow Diagram

### Watchdog Software Considerations

One way to help the watchdog timer to monitor software execution more closely is to set and reset the watchdog at different points in the program, rather than pulsing the watchdog input periodically. Figure 6 shows a flow diagram where the I/O driving the watchdog is set low in the beginning of the program, set high at the beginning of every subroutine or loop, and set low again when the program returns to the beginning. If the program should hang in any subroutine, the watchdog would timeout and reset the µP.

### Replacing the Backup Battery

Decouple BATT to GND with a 0.1µF capacitor. The backup power source can be removed while V<sub>CC</sub> remains valid without the danger of triggering a reset pulse. The device does not enter battery-backup mode when V<sub>CC</sub> stays above the reset threshold voltage.

### Power-Fail Comparator

#### Monitoring an Additional Power Supply

Monitor another voltage by connecting a resistive divider to PFI, as shown in Figure 7. The threshold voltage is:

$$V_{TH(PFI)} = 1.235 (R1/R2 + 1)$$

where V<sub>TH(PFI)</sub> is the threshold at which the monitored voltage will trip PFO.

To simplify the resistor selection, choose a value for R2 and calculate R1:

$$R1 = R2 [(V_{TH(PFI)}/1.235) - 1]$$

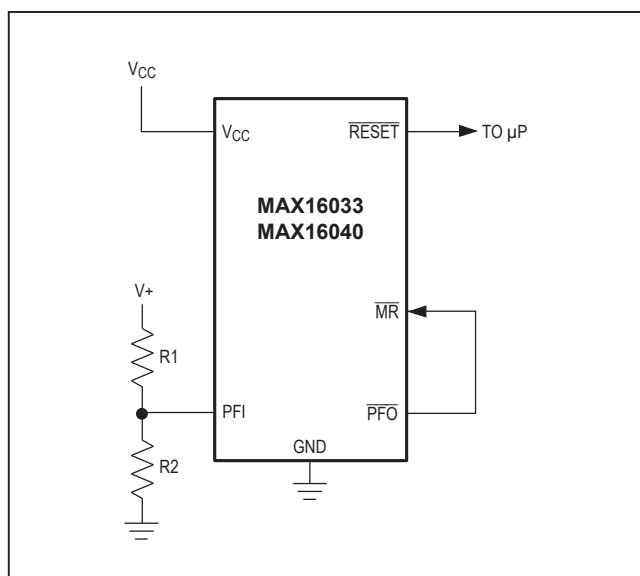


Figure 7. Monitoring an Additional Power Supply

Connect PFO to MR in applications that require RESET to assert when the second voltage falls below its threshold. RESET remains asserted as long as PFO holds MR low, and for 140ms (min) after PFO goes high.

#### Adding Hysteresis to the Power-Fail Comparator

The power-fail comparator provides a typical hysteresis of 12mV, which is sufficient for most applications where a power-supply line is being monitored through an external voltage-divider. Connect a voltage-divider between PFI and PFO, as shown in Figure 8a, to provide additional noise immunity. Select the ratio of R1 and R2 such that V<sub>PFI</sub> falls to 1.235V when V<sub>IN</sub> drops to its trip point (V<sub>TRIP</sub>). R3 adds hysteresis and is typically more than 10 times the value of R1 or R2. The hysteresis window extends above (V<sub>H</sub>) and below (V<sub>L</sub>) the original trip point, V<sub>TRIP</sub>. Connecting an ordinary signal diode in series with R3, as shown in Figure 8b, causes the lower trip point (V<sub>L</sub>) to coincide with the trip point without hysteresis (V<sub>TRIP</sub>). This method provides additional noise margin without compromising the accuracy of the power-fail threshold when the monitored voltage is falling. Set the current through R1 and R2 to be at least 10µA to ensure that the 100nA (max) PFI input current does not shift the trip point. Set R3 to be higher than 10kΩ to reduce the load at PFO. Capacitor C1 adds additional noise rejection.

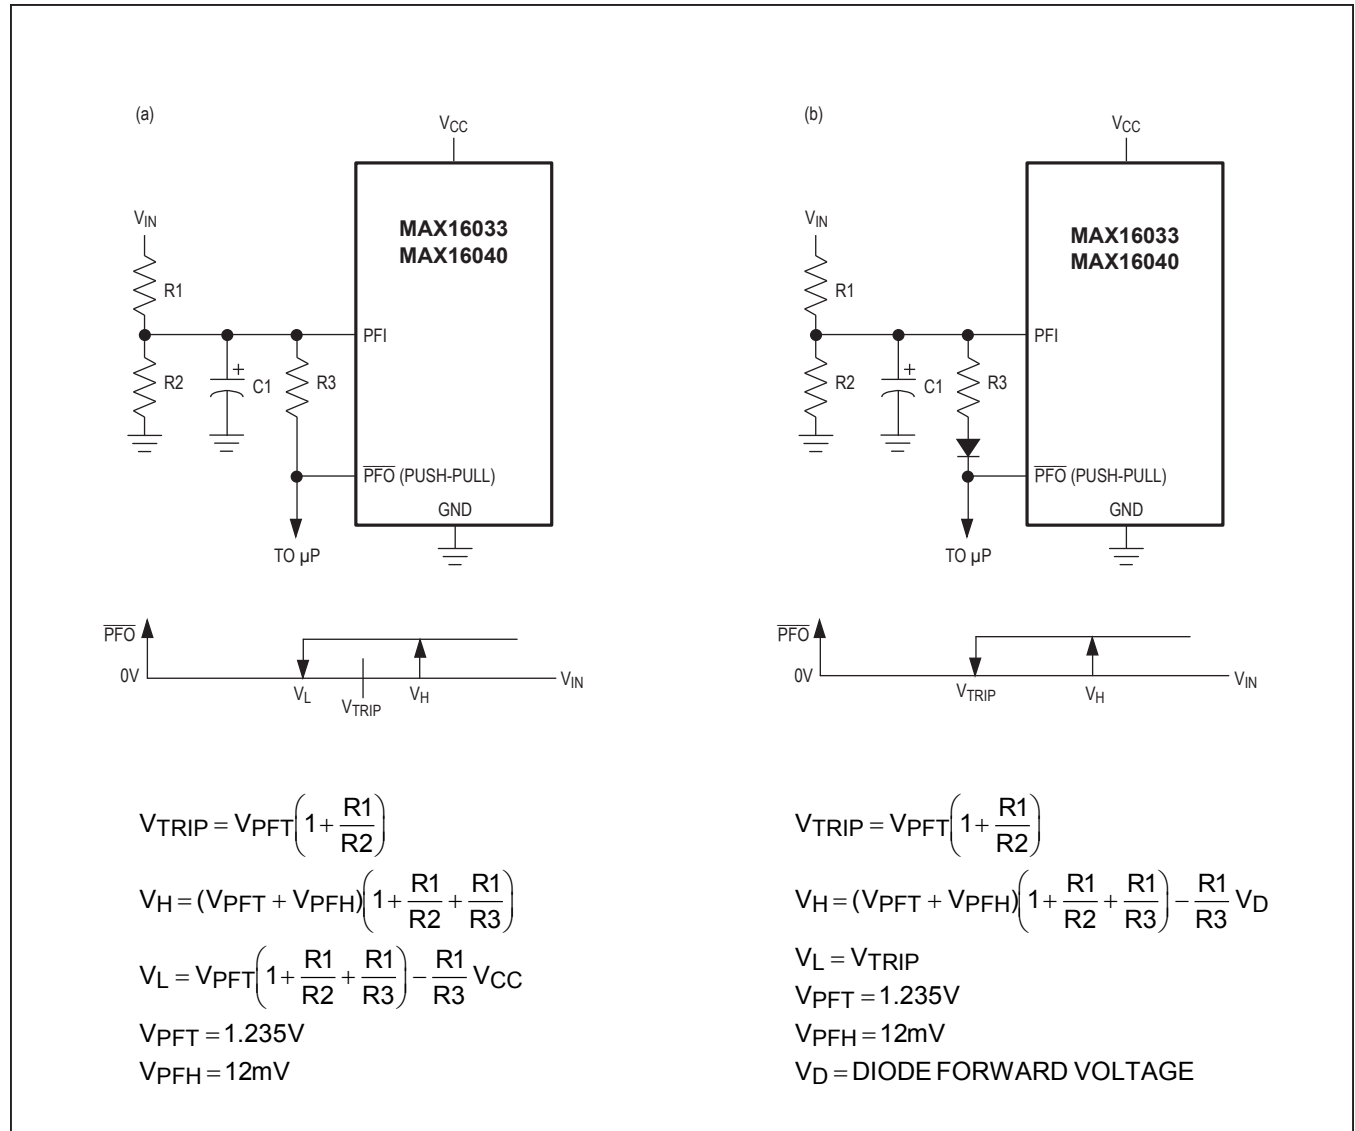


Figure 8. (a) Adding Additional Hysteresis to the Power-Fail Comparator. (b) Shifting the Additional Hysteresis above V<sub>TRIP</sub>

**Monitoring a Negative Voltage**

Connect the circuit, as shown in Figure 9, to use the power-fail comparator to monitor a negative supply rail.  $\overline{\text{PFO}}$  stays low when  $V_-$  is good. When  $V_-$  rises to cause PFI to be above +1.235V,  $\overline{\text{PFO}}$  goes high. Ensure  $V_{\text{CC}}$  comes up before the negative supply.

**Negative-Going  $V_{\text{CC}}$  Transients**

The MAX16033–MAX16040 are relatively immune to short-duration, negative-going  $V_{\text{CC}}$  transients. Resetting the µP when  $V_{\text{CC}}$  experiences only small glitches is not usually desired.

The *Typical Operating Characteristics* section contains a Maximum Transient Duration vs. Reset Threshold Overdrive graph. The graph shows the maximum pulse width of a negative-going  $V_{\text{CC}}$  transient that would not trigger a reset pulse. As the amplitude of the transient increases (i.e., goes further below the reset threshold voltage), the maximum allowable pulse width decreases. Typically, a  $V_{\text{CC}}$  transient that goes 100mV below the reset threshold and lasts for 25µs does not trigger a reset pulse.

A 0.1µF bypass capacitor mounted close to  $V_{\text{CC}}$  provides additional transient immunity.

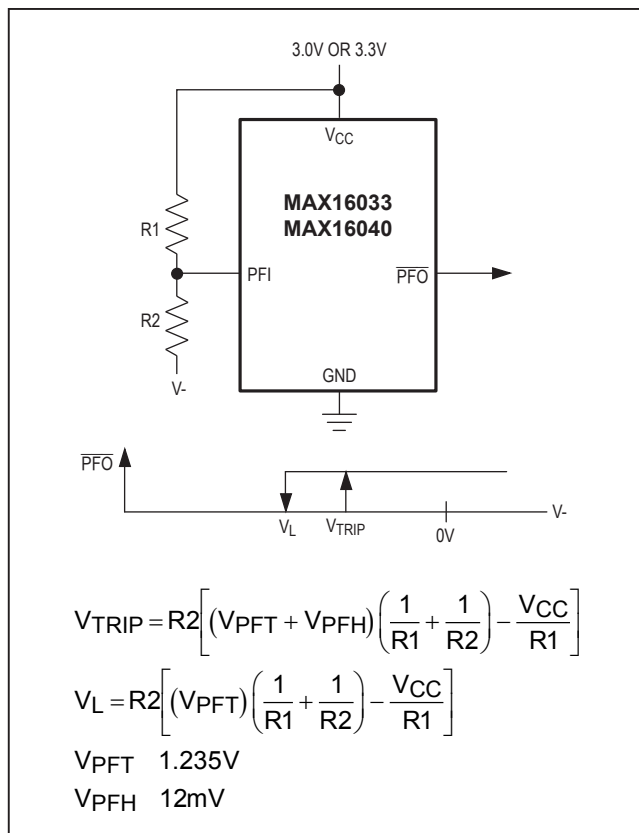


Figure 9. Monitoring a Negative Voltage





## Device Marking Codes

| PART                   | TOP MARK    | PART                   | TOP MARK    | PART                   | TOP MARK    | PART                   | TOP MARK    |
|------------------------|-------------|------------------------|-------------|------------------------|-------------|------------------------|-------------|
| MAX16033LLB23+T        | +ABE        | MAX16035LLB23+T        | +ACC        | MAX16037LLA23+T        | +ABX        | MAX16039LLA23+T        | +ACV        |
| MAX16033LLB26+T        | +ABF        | MAX16035LLB26+T        | +ACD        | MAX16037LLA26+T        | +ABY        | MAX16039LLA26+T        | +ACW        |
| <b>MAX16033LLB29+T</b> | <b>+ABG</b> | <b>MAX16035LLB29+T</b> | <b>+ACE</b> | <b>MAX16037LLA29+T</b> | <b>+ABZ</b> | <b>MAX16039LLA29+T</b> | <b>+ACX</b> |
| <b>MAX16033LLB31+T</b> | <b>+ABH</b> | <b>MAX16035LLB31+T</b> | <b>+ACF</b> | <b>MAX16037LLA31+T</b> | <b>+ACA</b> | <b>MAX16039LLA31+T</b> | <b>+ACY</b> |
| MAX16033LLB44+T        | +ABI        | MAX16035LLB44+T        | +ACG        | MAX16037LLA44+T        | +ACB        | MAX16039LLA44+T        | +ACZ        |
| <b>MAX16033LLB46+T</b> | <b>+ABJ</b> | <b>MAX16035LLB46+T</b> | <b>+ACH</b> | <b>MAX16037LLA46+T</b> | <b>+ACC</b> | <b>MAX16039LLA46+T</b> | <b>+ADA</b> |
| MAX16033PLB23+T        | +ABK        | MAX16035PLB23+T        | +ACI        | MAX16037PLA23+T        | +ACD        | MAX16039PLA23+T        | +ADB        |
| MAX16033PLB26+T        | +ABL        | MAX16035PLB26+T        | +ACJ        | MAX16037PLA26+T        | +ACE        | MAX16039PLA26+T        | +ADC        |
| <b>MAX16033PLB29+T</b> | <b>+ABM</b> | <b>MAX16035PLB29+T</b> | <b>+ACK</b> | <b>MAX16037PLA29+T</b> | <b>+ACF</b> | <b>MAX16039PLA29+T</b> | <b>+ADD</b> |
| <b>MAX16033PLB31+T</b> | <b>+ABN</b> | <b>MAX16035PLB31+T</b> | <b>+ACL</b> | <b>MAX16037PLA31+T</b> | <b>+ACG</b> | <b>MAX16039PLA31+T</b> | <b>+ADE</b> |
| MAX16033PLB44+T        | +ABO        | MAX16035PLB44+T        | +ACM        | MAX16037PLA44+T        | +ACH        | MAX16039PLA44+T        | +ADF        |
| <b>MAX16033PLB46+T</b> | <b>+ABP</b> | <b>MAX16035PLB46+T</b> | <b>+ACN</b> | <b>MAX16037PLA46+T</b> | <b>+ACI</b> | <b>MAX16039PLA46+T</b> | <b>+ADG</b> |
| MAX16034LLB23+T        | +ABQ        | MAX16036LLB23+T        | +ACO        | MAX16038LLA23+T        | +ACJ        | MAX16040LLA23+T        | +ADH        |
| MAX16034LLB26+T        | +ABR        | MAX16036LLB26+T        | +ACP        | MAX16038LLA26+T        | +ACK        | MAX16040LLA26+T        | +ADI        |
| <b>MAX16034LLB29+T</b> | <b>+ABS</b> | <b>MAX16036LLB29+T</b> | <b>+ACQ</b> | <b>MAX16038LLA29+T</b> | <b>+ACL</b> | <b>MAX16040LLA29+T</b> | <b>+ADJ</b> |
| <b>MAX16034LLB31+T</b> | <b>+ABT</b> | <b>MAX16036LLB31+T</b> | <b>+ACR</b> | <b>MAX16038LLA31+T</b> | <b>+ACM</b> | <b>MAX16040LLA31+T</b> | <b>+ADK</b> |
| MAX16034LLB44+T        | +ABU        | MAX16036LLB44+T        | +ACS        | MAX16038LLA44+T        | +ACN        | MAX16040LLA44+T        | +ADL        |
| <b>MAX16034LLB46+T</b> | <b>+ABV</b> | <b>MAX16036LLB46+T</b> | <b>+ACT</b> | <b>MAX16038LLA46+T</b> | <b>+ACO</b> | <b>MAX16040LLA46+T</b> | <b>+ADM</b> |
| MAX16034PLB23+T        | +ABW        | MAX16036PLB23+T        | +ACU        | MAX16038PLA23+T        | +ACP        | MAX16040PLA23+T        | +ADN        |
| MAX16034PLB26+T        | +ABX        | MAX16036PLB26+T        | +ACV        | MAX16038PLA26+T        | +ACQ        | MAX16040PLA26+T        | +ADO        |
| <b>MAX16034PLB29+T</b> | <b>+ABY</b> | <b>MAX16036PLB29+T</b> | <b>+ACW</b> | <b>MAX16038PLA29+T</b> | <b>+ACR</b> | <b>MAX16040PLA29+T</b> | <b>+ADP</b> |
| <b>MAX16034PLB31+T</b> | <b>ABZ</b>  | <b>MAX16036PLB31+T</b> | <b>+ACX</b> | <b>MAX16038PLA31+T</b> | <b>+ACS</b> | <b>MAX16040PAL31+T</b> | <b>+ADQ</b> |
| MAX16034PLB44+T        | +ACA        | MAX16036PLB44+T        | +ACY        | MAX16038PLA44+T        | +ACT        | MAX16040PLA44+T        | +ADR        |
| <b>MAX16034PLB46+T</b> | <b>+ACB</b> | <b>MAX16036PLB46+T</b> | <b>+ACZ</b> | <b>MAX16038PLA46+T</b> | <b>+ACU</b> | <b>MAX16040PLA46+T</b> | <b>+ADS</b> |

**Note:** 48 standard versions shown in **bold** are available. Sample stock is generally held on standard versions only. Contact factory for nonstandard versions availability.


Pin Configurations

TOP VIEW

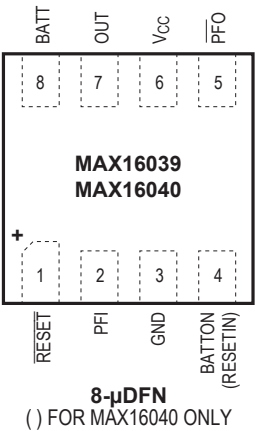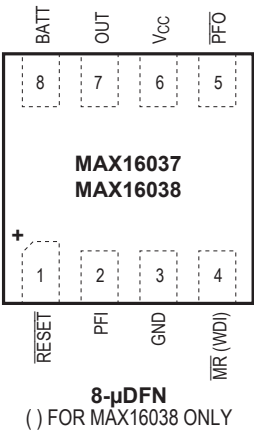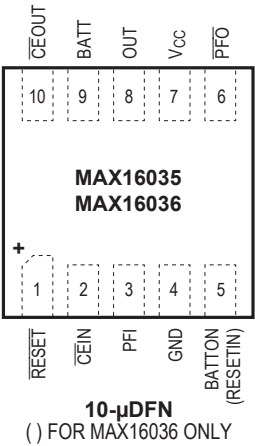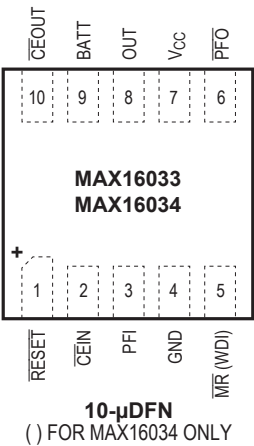

+ DENOTES A LEAD(Pb)-FREE PACKAGE.

## Typical Operating Circuit

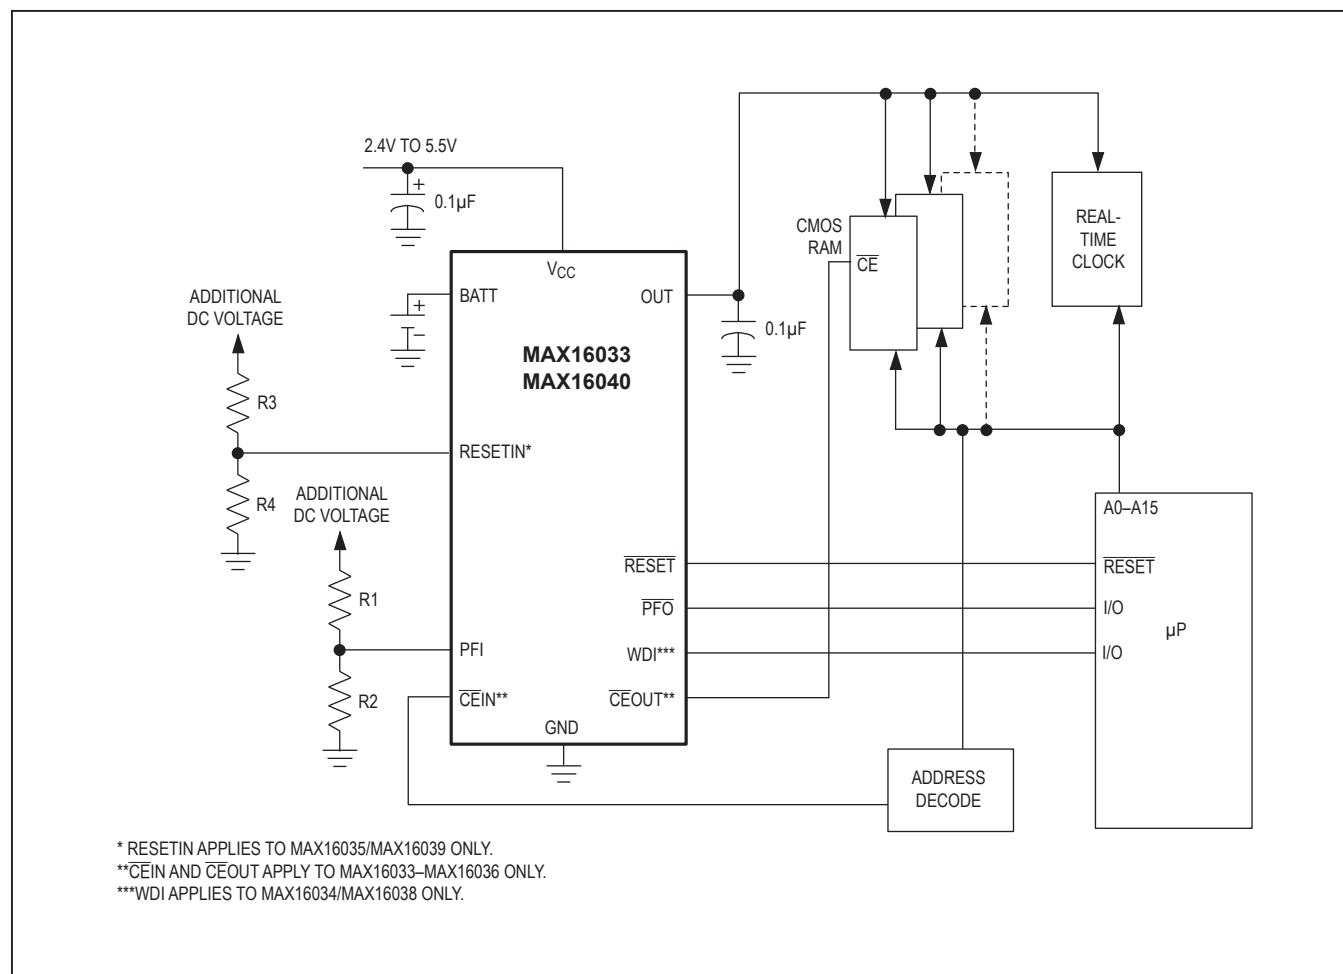

## Ordering Information (continued)

| PART*                   | TEMP RANGE     | PIN-PACKAGE |
|-------------------------|----------------|-------------|
| <b>MAX16035</b> LLB__+T | -40°C to +85°C | 10 µDFN     |
| MAX16035PLB__+T         | -40°C to +85°C | 10 µDFN     |
| <b>MAX16036</b> LLB__+T | -40°C to +85°C | 10 µDFN     |
| MAX16036PLB__+T         | -40°C to +85°C | 10 µDFN     |
| <b>MAX16037</b> LLA__+T | -40°C to +85°C | 8 µDFN      |
| MAX16037PLA__+T         | -40°C to +85°C | 8 µDFN      |
| <b>MAX16038</b> LLA__+T | -40°C to +85°C | 8 µDFN      |
| MAX16038PLA__+T         | -40°C to +85°C | 8 µDFN      |
| <b>MAX16039</b> LLA__+T | -40°C to +85°C | 8 µDFN      |
| MAX16039PLA__+T         | -40°C to +85°C | 8 µDFN      |
| MAX16039PLA31+T         | -55°C to +85°C | 8 µDFN      |
| <b>MAX16040</b> LLA__+T | -40°C to +85°C | 8 µDFN      |
| MAX16040PLA__+T         | -40°C to +85°C | 8 µDFN      |

\*These parts offer a choice of reset threshold voltages. From the Reset Threshold Ranges table, insert the desired threshold voltage code in the blank to complete the part number. See the Selector Guide for a listing of device features.

+Denotes a lead(Pb)-free/RoHS-compliant package.

T = Tape and reel.

## Reset Threshold Ranges

| SUFFIX | RESET-THRESHOLD VOLTAGE (V) |      |      |
|--------|-----------------------------|------|------|
|        | MIN                         | TYP  | MAX  |
| 46     | 4.50                        | 4.63 | 4.75 |
| 44     | 4.25                        | 4.38 | 4.50 |
| 31     | 3.00                        | 3.08 | 3.15 |
| 29     | 2.85                        | 2.93 | 3.00 |
| 26     | 2.55                        | 2.63 | 2.70 |
| 23     | 2.25                        | 2.32 | 2.38 |

## Chip Information

PROCESS: BiCMOS

## Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|--------------|--------------|-------------------------|-------------------------|
| 8 µDFN       | L822+1       | <a href="#">21-0164</a> | <a href="#">90-0005</a> |
| 10 µDFN      | L1022+1      | <a href="#">21-0164</a> | <a href="#">90-0006</a> |

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                       | PAGES<br>CHANGED |
|--------------------|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 1                  | 5/14             | Data sheet rebranded; updated <i>Electrical Characteristics</i> and <i>Ordering Information</i> tables to support MAX16039PLA31+T option at -55°C | 2, 19            |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.*