

## NTS350 Series

350 Watts

### Data Sheet

**Total Power:** 200 - 350 Watts  
**Input Voltage:** 85 - 264 Vac  
 120 - 300 Vdc  
**# of Outputs:** Single

### SPECIAL FEATURES

- Active power factor correction
- IEC EN61000-3-2 compliance
- Remote sense
- Power fail and remote inhibit
- Single wire current sharing
- Built-in EMI filter
- Low output ripple
- 5 V standby
- 12 V fan output
- Overvoltage protection
- Overload protection
- Thermal overload protection
- DC power good
- Built in OR-ing diode/FET
- Optional fan cover (-CF suffix)
- Optional end fan cover (-CEF suffix)

### SAFETY

- TUV 60950
- UL 0950
- CSA 60950
- cULus 60950 (-CEF)
- NEMKO 60950
- AUSTEL 60950
- CB Certificate and report
- CE Mark (LVD)
- CCC Certificate



### Electrical Specifications

#### Input

|                                |  |
|--------------------------------|--|
| Input range:                   | 85 - 264 Vac (wide range)  |
| Frequency:                     | 47 - 440 Hz (47- 63 Hz for -CEF versions)  |
| Inrush current:                | 38 A max., cold start @ 25 °C  |
| Efficiency:                    | 85% typical at full load   |
| EMI filter:                    | FCC Class B conducted and radiated; CISPR22 Class B conducted and radiated; EN55022 Class B conducted and radiated; VDE0878PT3 Class B conducted and radiated. |
| Safety ground leakage current: | < 0.5 mA @ 50/60 Hz, 264 Vac input   |

#### Output

|                         |  |
|-------------------------|--|
| Maximum power:          | 200 W for convection; 350 W with 30CFM forced air  |
| Adjustment range:       | ± 5%   |
| Standby output:         | 5 V @ 2 A regulated, ± 5%  |
| Fan output:             | 12 V @ 1 A, -5 %, +7%, 0.5 A for -CF version   |
| Hold-up time:           | 20 ms @ 350 W load, 115 Vac nominal line at factory voltage setting                          |
| Overload protection:    | Short circuit protection on all outputs. Case overload protected @ 115 - 130% of peak rating |
| Overvoltage protection: | 20 - 35% above nominal output  |

## Logic Control

|                      |  |
|----------------------|--|
| <b>Power failure</b> | TTL logic signal goes high 100 - 500 msec after main output. It goes low at least 4 msec before loss of regulation |
| <b>Remote on/off</b> | Requires an external contact closure to inhibit outputs  |
| <b>DC OK</b>         | TTL logic goes high after the output is in regulation. It goes low when there is loss of regulation.               |
| <b>Remote sense</b>  | Compensates for 0.5 V lead drop min. Will operate without remote sense connected. Reverse connection protected.    |

## Environmental Specifications


|  |  |
|--|--|
| <b>Operating temperature:</b>          | 0° to 50 °C ambient derate each output as 2.5% per degree from 50° to 70 °C.   |
| <b>Storage temperature:</b>            | -40 °C to +85 °C   |
| <b>Electromagnetic susceptibility:</b> | Designed to meet EN61000-4; -2, -3, -4, -5, -6, -8, -11 Level 3  |
| <b>Humidity:</b>                       | Operating; non-condensing 10% to 90% RH  |
| <b>Vibration:</b>                      | Three orthogonal axes, sweep at 1 oct/min, 5 min. dwell at four major resonances. 2 G peak 8 Hz to 500 Hz, operational |
| <b>MTBF demonstrated:</b>              | 1M hours at full load and 25 °C ambient conditions   |

## Ordering Information

| Model Number | Output Voltage | Minimum Load | Maximum Load with Convection Cooling | Maximum Load with 30CFM Forced Air | Peak Load <sup>1</sup> | Regulation <sup>2</sup> | Ripple P/P (PARD) <sup>3</sup> |
|--------------|----------------|--------------|--------------------------------------|------------------------------------|------------------------|-------------------------|--------------------------------|
| NTS353       | 12 V           | 0 A          | 16.6 A                               | 29.2 A                             | 33 A                   | ± 2%                    | 120 mV                         |
| NTS355       | 24 V           | 0 A          | 8.3 A                                | 14.6 A                             | 16.5 A                 | ± 2%                    | 240 mV                         |
| NTS358       | 48 V           | 0 A          | 4.2 A                                | 7.3 A                              | 8.2 A                  | ± 2%                    | 480 mV                         |
| NTS359       | 54 V           | 0 A          | 3.7 A                                | 6.5 A                              | 7.4 A                  | ± 2%                    | 540 mV                         |

1. Peak current lasting < 30 seconds with a maximum 10% duty cycle.
2. At 25 °C including initial tolerance, line voltage, load currents and output voltages adjusted to factory settings.
3. Peak-to-peak with 20 MHz bandwidth and 10 µF (tantalum capacitor) in parallel with a 0.1 µF capacitor at rated line voltage and load ranges.
4. CF suffix added to the model number indicates cover with top fan. -CEF suffix added to the model number indicates cover with end mounted fan cover and AC inlet
5. This product is a Component Power Supply and is only for inclusion by professional installers within other equipment and must not be operated as a standalone product. EMC compliance to appropriate standards must be verified at the system level. This product is for sale to OEMs and System Integrators, including through Distribution Channels. It is not intended for sale to End Users.

## Pin Assignments

| Connector   |        |                       |
|---|--------|-----------------------|
| SK1   | PIN 1  | Line                  |
|   | PIN 3  | Neutral               |
|   | PIN 5  | Ground                |
|  | PIN 1  | V1 swp                |
|   | PIN 2  | - Remote Sense        |
|   | PIN 3  | + Remote Sense        |
|   | PIN 4  | 5VSB (standby)        |
|   | PIN 5  | 5VSB return           |
|   | PIN 6  | +12V                  |
|   | PIN 7  | Common                |
|   | PIN 8  | Inhibit               |
|   | PIN 9  | DC power good (DC OK) |
|   | PIN 10 | Power Fail (POK)      |

## Adjustment Potentiometers


|    |                   |
|----|-------------------|
| P1 | +V1 Output adjust |
| P3 | +5VSB adjust      |

## Mating Connectors


|  |                        |
|--|------------------------|
| SK1 AC input   | Molex 09-50-8051 (USA) |
|  | Molex 09-91-0500 (UK)  |
|  | PINS:08-52-0113        |
| SK2,3,4  | Molex BB-124-08        |
| SK5 Control signals  | Molex 90142-0010       |
|  | PINS: 90119-2110       |
| Or   | Amp: 87977-3           |
|  | PINS: 87309-8          |
| Artesyn Embedded Power Connector Kit #70-841-022 includes all of the above |                        |

- 1.Specifications subject to change without
- 2.All dimensions in inches (mm), tolerance is  $\pm 0.2$ ".
- 3.Specifications are at factory settings
- 4.Mounting maximum insertion depth is 0.12".
- 5.Warranty: 2 year
- 6.Weight: NTS35X 1.65 lbs/750g. NTS35X-CF 2 lbs/909g. NTS35X-CEF 2.25 lbs/1022g.

## Mechanical Drawing

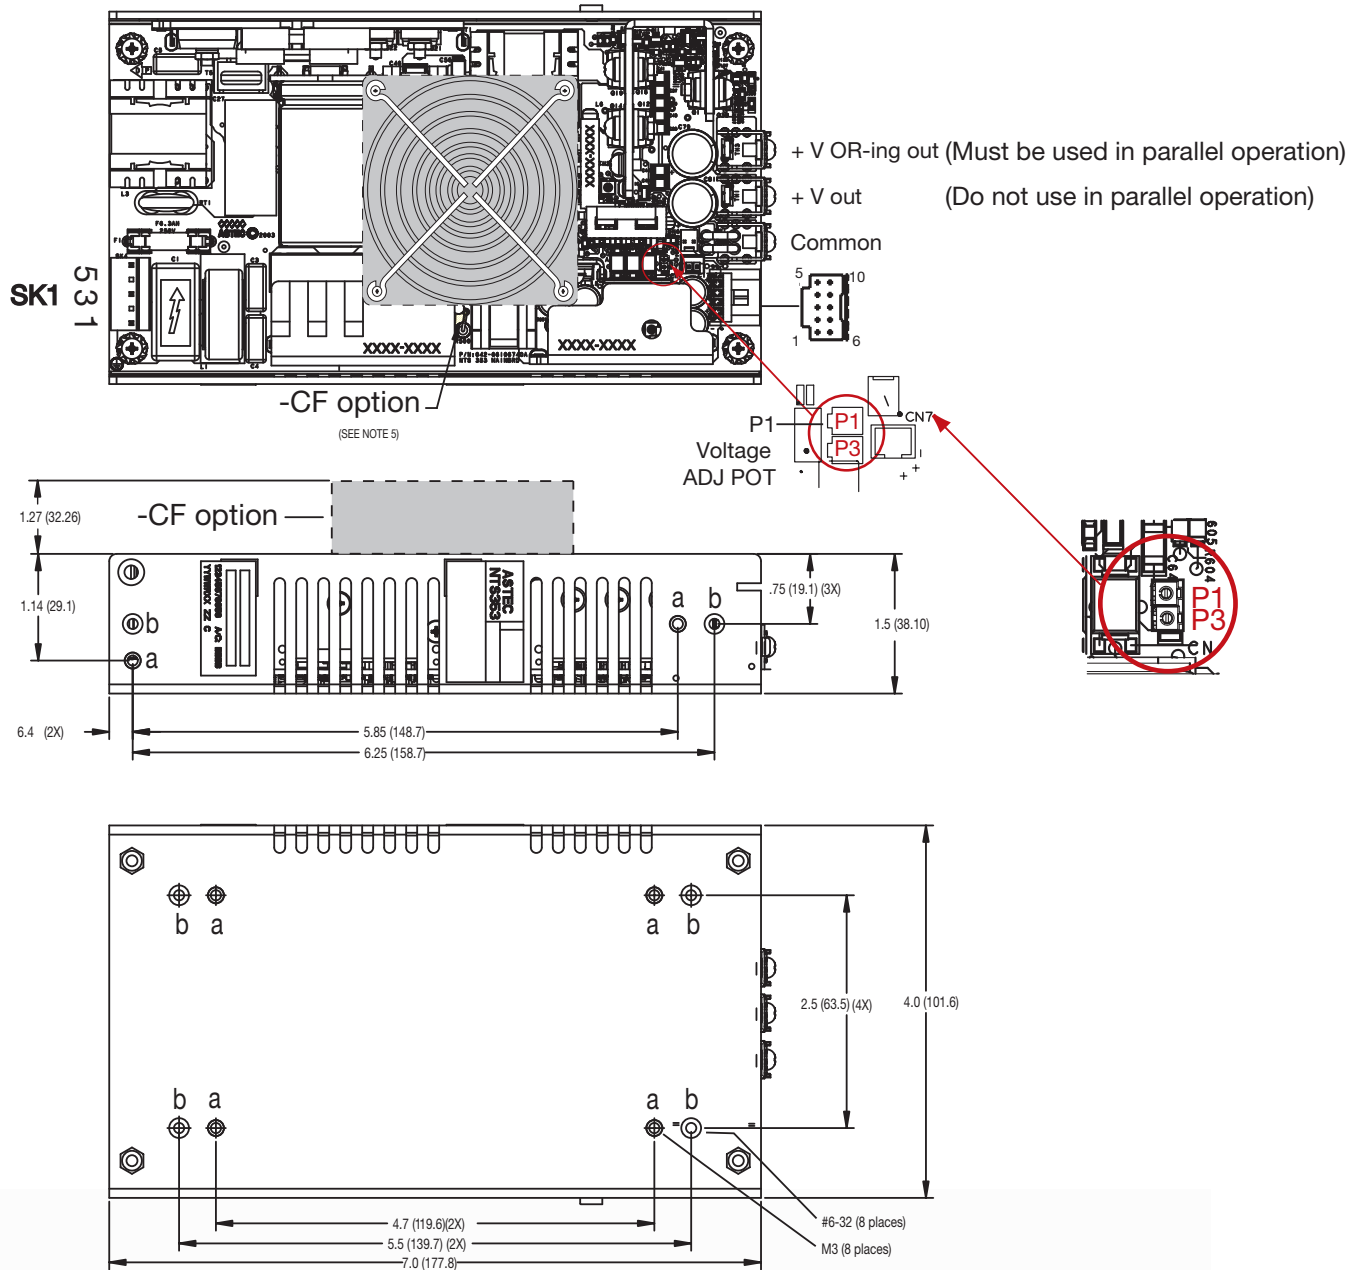

## Mechanical Drawing - CEF option

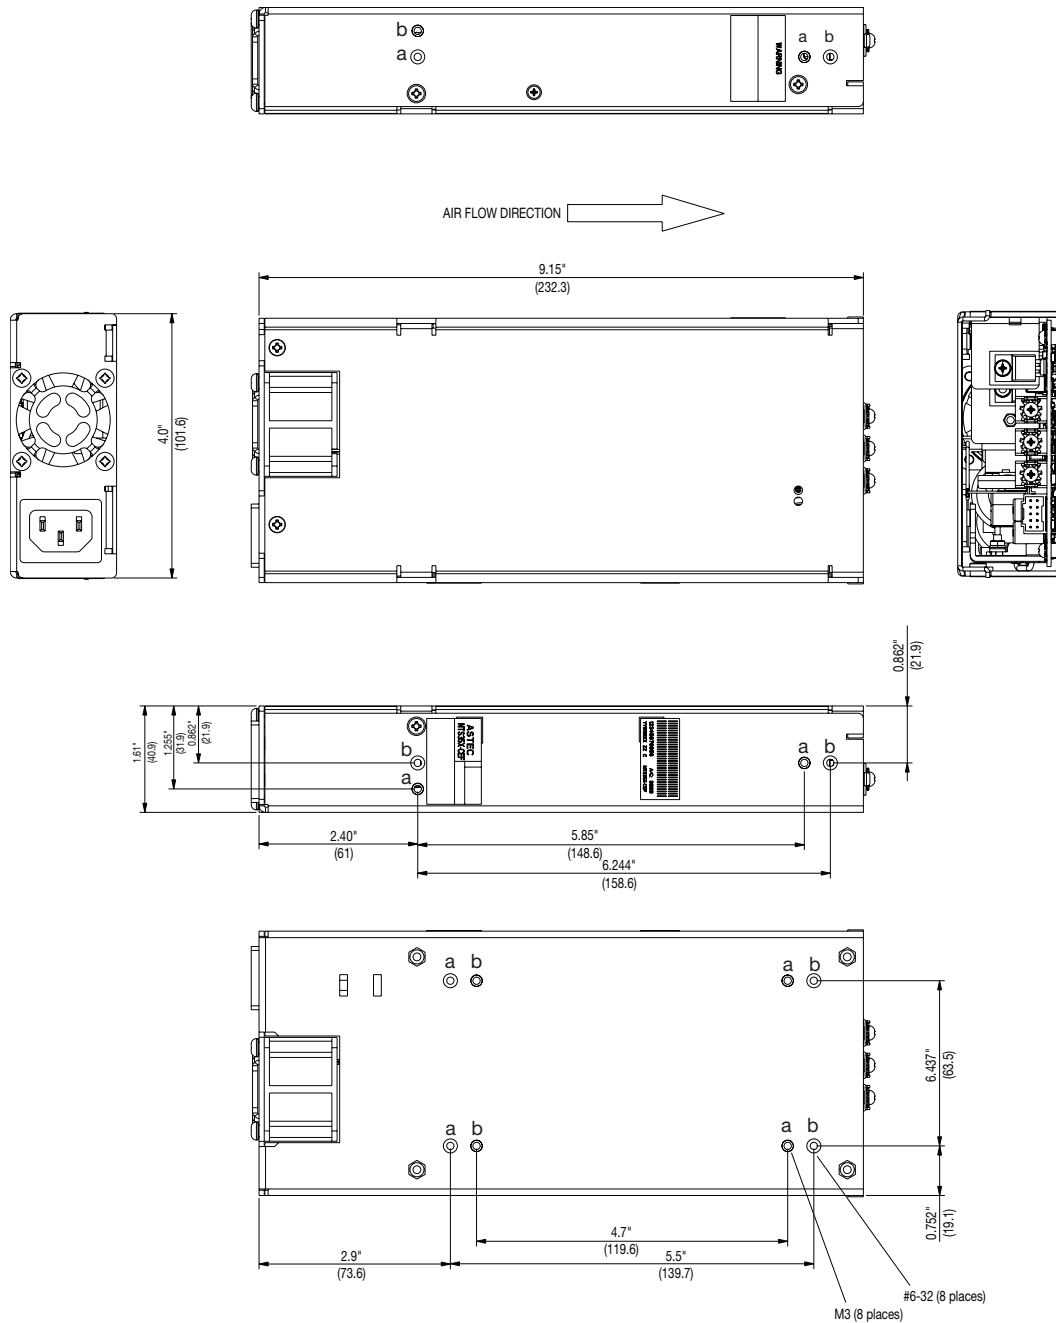

### WORLDWIDE OFFICES

#### Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

#### Europe (UK)

Ground Floor Offices, Barbary House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

#### Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333

**ARTESYN**<sup>TM</sup>  
An Advanced Energy Company

[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

NTS350 DS 18Dec2019



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Artesyn Embedded Technologies:](#)

[70-841-022](#)