

Micro Commercial Components



Micro Commercial Components 20736 Marilla Street Chatsworth CA91311

Phone:(818)-701-4933 Fax: (818)-701-4939

MC78L05F

Three-Terminal Low Current Positive

Voltage Regulator

Features

- Halogen free available upon request by adding suffix "-HF" Maximum Output current Io:0.1A Lead Free Finish/RoHS Compliant ("P" Suffix designates RoHS Compliant. See ordering information) Internal Short Circuit Current Limiting
- Internal Thermal Overload Protection
- No External Components Required
- Epoxy meets UL 94 V-0 flammability rating
- Moisure Sensitivity Level 1


Maximum Ratings


Parameter	Symbol	Value	Unit
Input Voltage (Vo=5.8V)	V ₁	30	V
Operating Junction Temperature	T _{OPR}	-20+120	$^{\circ}\!\mathbb{C}$
Storage Temperature Range	T _{STG}	-55+150	$^{\circ}\!\mathbb{C}$

Electrical Characteristics(V_i=10V, I₀=40mA, 0 °C <Tj<125 °C, C1=0 33uF Ca=0 1uF unless otherwise specified)

v i=v.vvui , vv=v. iui , uiiivəə vuivi miəv əpvviiivu;							
Parameter	Sym	Min	Тур	Max	Test conditions		
Output Voltage	V ₀	4.8V	5.0V	5.2V	T _j =25°C		
		4.7V		5.25V	7V≦V ₁ ≦20V,		
		5.0V			I₀=1mA-40mA		
		4.7V		5.25V	$7V \leq V_1 \leq V_{MAX}$		
		5.0V			I₀=1mA-700mA (Note)		
Load Regulation	$\triangle V_o$		11mV	60mV	l₀=1mA-100mA, T _j =25°C,		
			5.0mV	30mV	I _o =1mA-40mA, T _i =25°C		
Line	$\triangle V_o$		8mV	150mV	7V≦V ₁ ≦20V, T _j =25°C		
regulation			6mV	100mV	$8V \le V_1 \le 20V$, $T_j = 25^{\circ}C$		
Quiescent	I _q		2.0mA	5.5mA			
Current	$\triangle I_q$			1.5mA	8V≦V ₁ ≦20V		
Quiescent Current	$\triangle I_q$			0.1mA	1mA≤I₀≤40mA		
Change	∠⊃iq			U. IIIIA	1111A = 10 = 40111A		
Output Noise	V _N		40µV		10Hz≦f≦100KHz		
Voltage Ripple					9\/<\/<20\/		
Rejection	RR	41dB	80dB		8V≦V ₁ ≦20V f=120Hz, T _j =25°C		
Dropout Voltage	V _d		1.7V		T _j =25°C		

*Note: Bypass Capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators Typical Application:



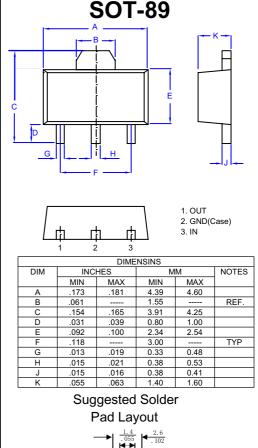


mm

MC78L05F



Figure 1. Representative Schematic Diagram

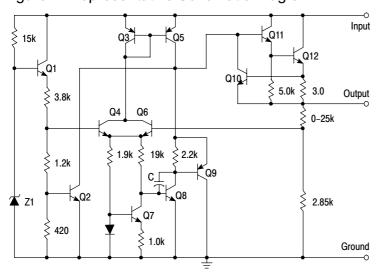



Micro Commercial Components

Ordering Information:

Device	Packing	
Part Number-TP	Tape&Reel 1Kpcs/Reel	

Note: Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.