
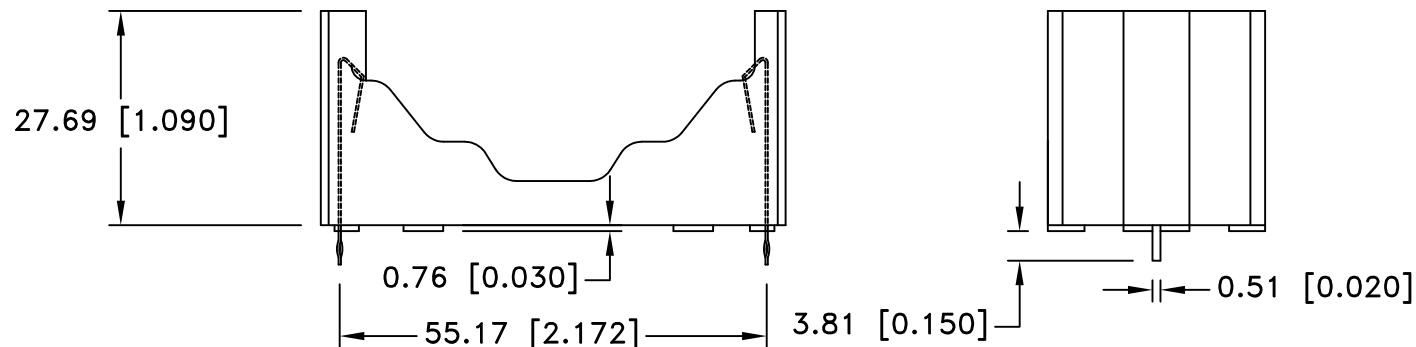
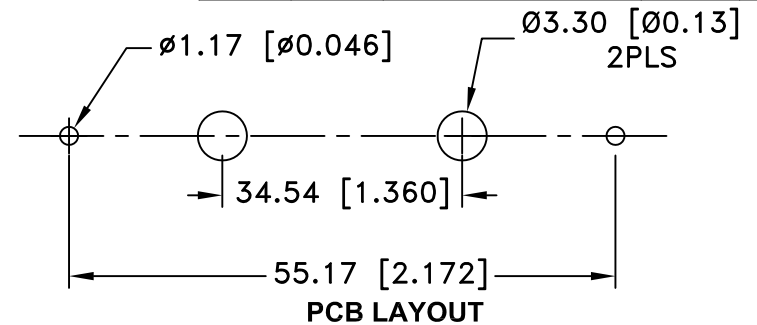


Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/29/05	A	UPDATED NOTES. CHANGED TITLE	T.B.	B.S.	
1/28/06	B	ADDED DETAIL FOR POSITIVE CONTACT RIBS	T.B.	B.S.	
8/06/14	C	UPDATED TO ROHS 2 COMPLIANT	T.B.	B.S.	

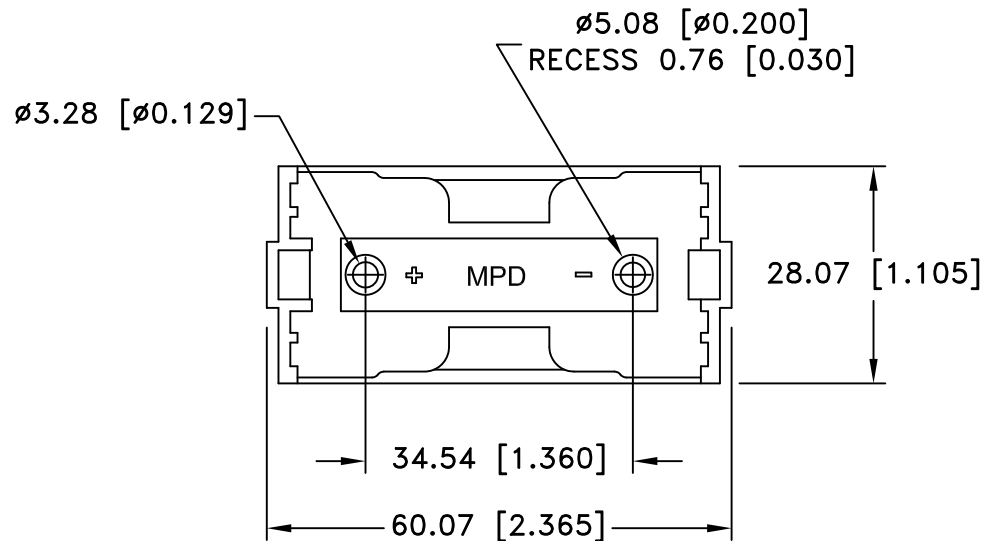

#### SPECIFICATIONS:

Holder Material: Black PBT, 30% Glass, UL94V-0

Contacts: 302 Spring temper stainless steel, Gold plated

Vibration Test: 10-50-10 Hz swept in 60 seconds

X,Y,Z direction: 1 hour each direction, No dislodgement

of the cell or damage, No discontinuity over 10 micro-seconds

Shock Test: Half sine wave acceleration 150g, 6 micro-seconds, 1 shock

pulses each direction per axis, total of 6 pulses, No evidence


of physical damage

Drop Test: Drop height 1meter, Randomly oriented, 1 drop per direction,

total 1 drop, No evidence of physical damage

Built in Reverse polarity protection

ROHS 2 COMPLIANT

Tolerance (Except as noted)	 Memory Protection Devices, Inc 200 Broad Hollow Road, Farmingdale, New York 11735		
decimal $\pm .5$ (.020)		Scale	Drawn By B.S.
			Approved By T.B.
Fractional $\pm .8$ (.030)	Title MILITARY BATTERY HOLDER FOR C CELLS		
Angular $\pm 3^\circ$	Date 8/06/14	Drawing Number BHC-POL	