

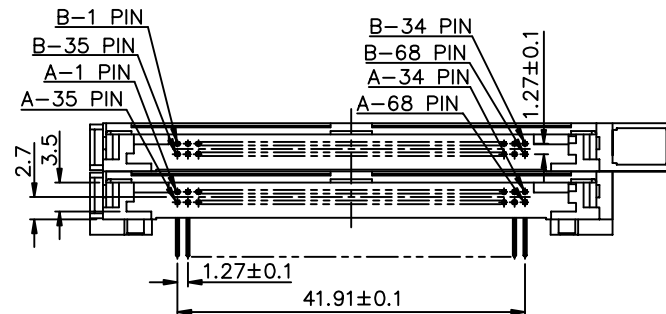
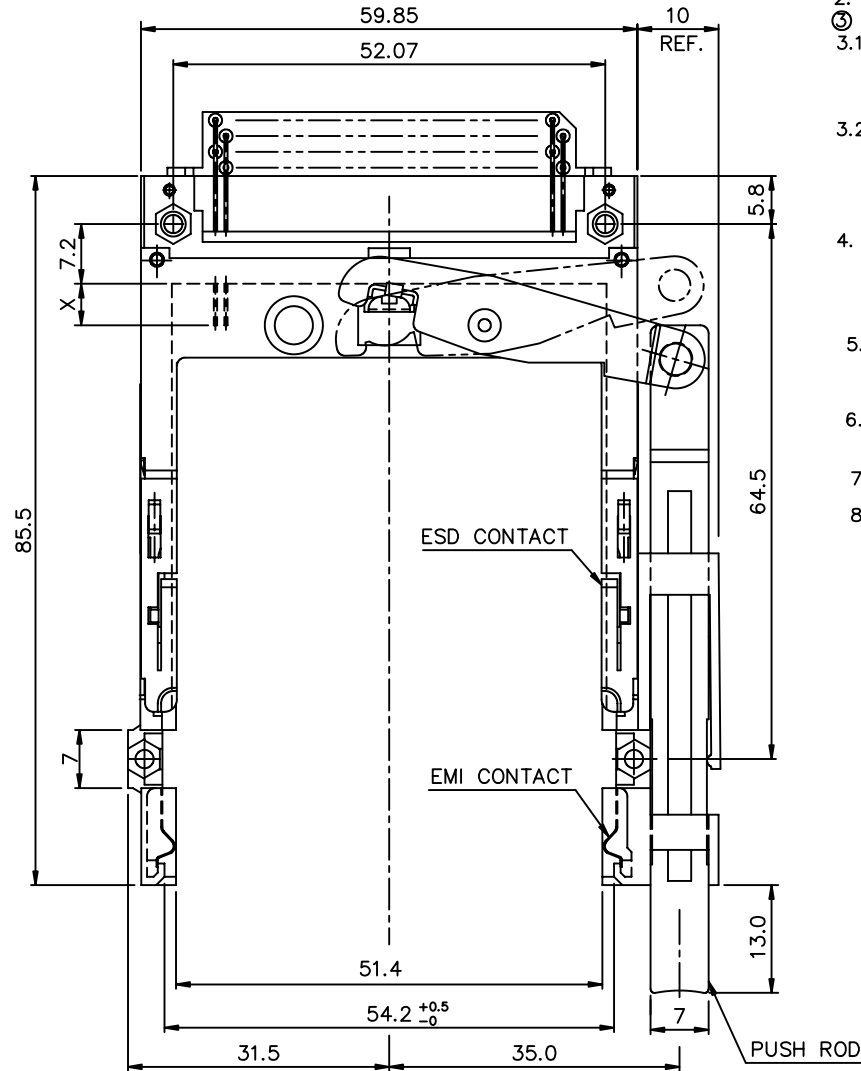


61848-220CA/220CALF

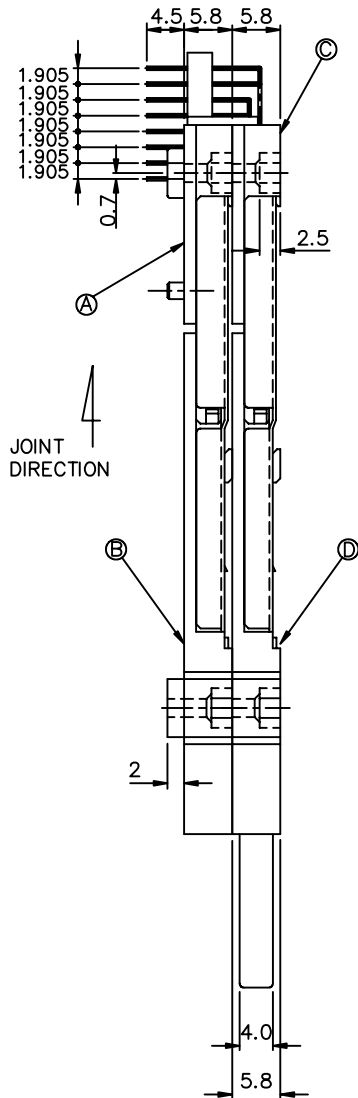


4.25±0.1	3.5±0.1	5.0±0.1
OTHERS	36,67	1,17,34,35,51,68

6. IF LEAD FREE P.N.THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
7. IF LEAD FREE P/N.THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
8. LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

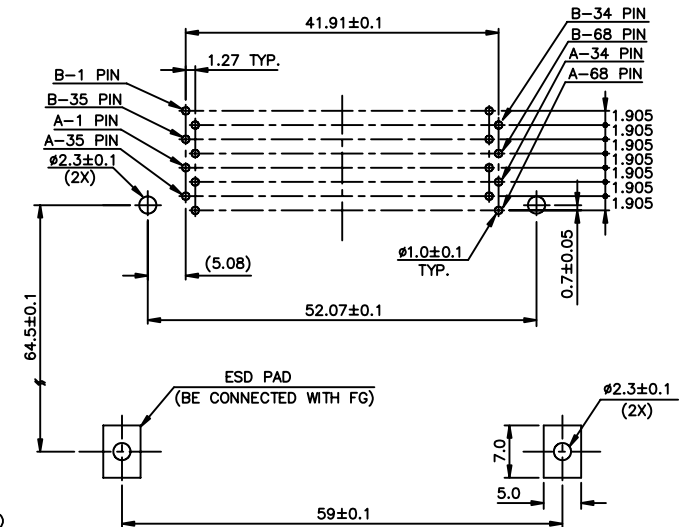


4 CARD INSERTION DIRECTION




mat'l code				tolerance unless otherwise specified			CUSTOMER COPY		 ELECTRONICS			
rev.	ecn no.	dr	date	linear				projection 	title 68P DOUBLE EJECTOR HEADER ASS'Y FOR TYPE 1/2/3			
A	T70129	WL	04/02/97		±0.30							
B	T00288	WL	09/18/00									
C	N05-0192	WB	07/04/05	angles	±2°							
				dr	C M HSU	03/04/97	unit	product family : PCMCIA				code
				engr	JOSEPH HSIA	03/04/97	mm/inch	size dwg no.				TWN
				chr	JOSEPH HSIA	03/04/97	scale	A3				sheet
				appd	JENN TAO	03/04/97	1.5:1	61848				1 OF 2
sheet	revision	C	C									
index	sheet	1	2									

D

61848-221CA/221CALF

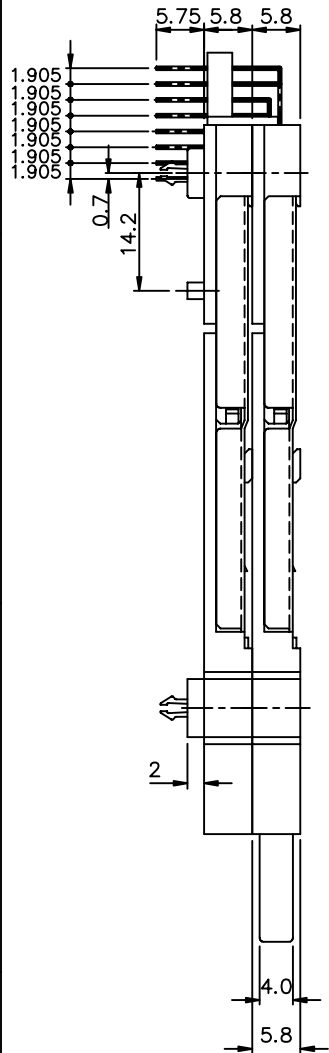

NO PLAY BETWEEN
HOLD DOWN AND HEADER

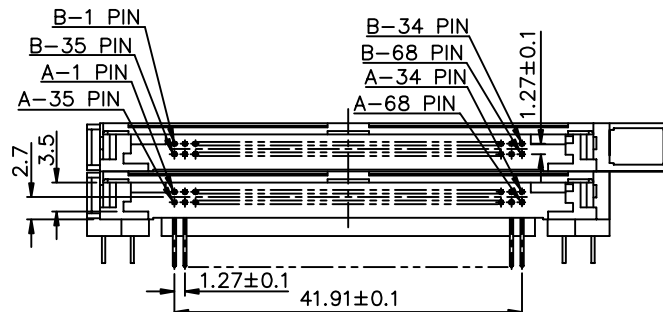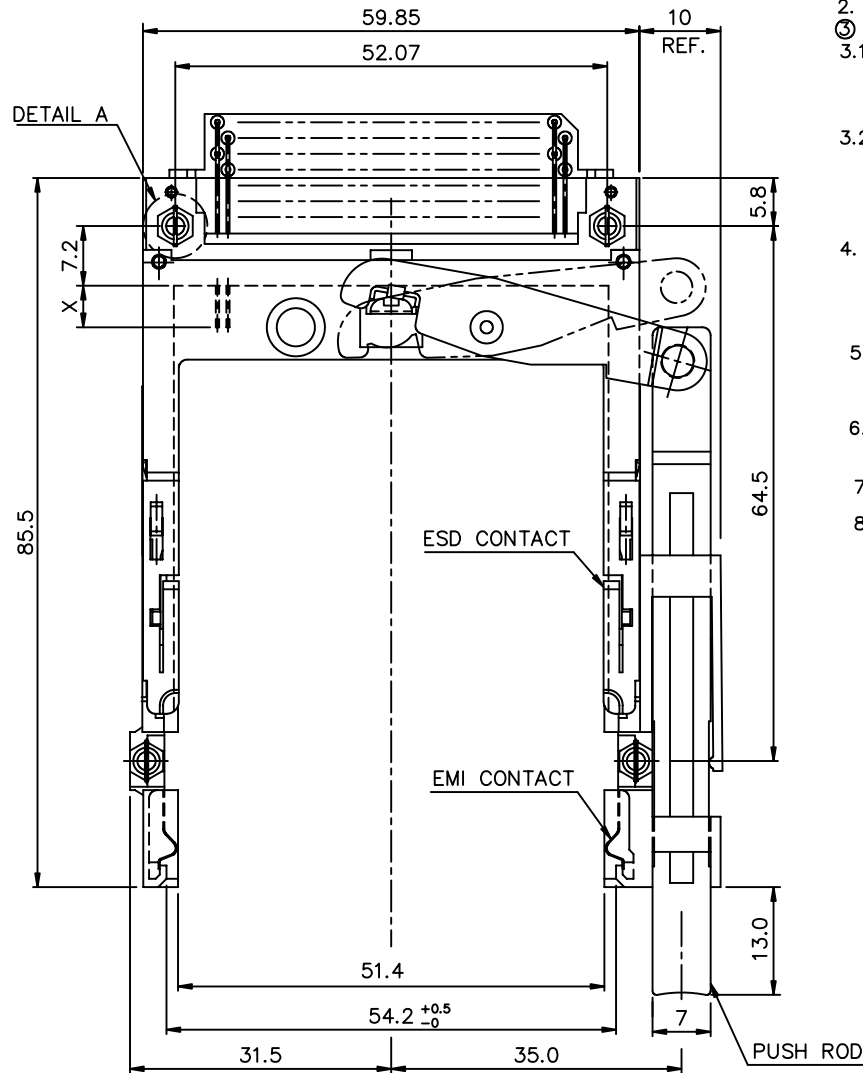

Top view of the package showing dimensions and pin locations. The drawing includes a central rectangular area with a width of 41.91 ± 0.1 and a length of 52.07 ± 0.1 . Pins are located along the top and bottom edges. The top edge has pins labeled B-1, B-35, A-1, A-35, B-34, B-68, A-34, and A-68. The bottom edge has pins labeled B-1, B-35, A-1, A-35, B-34, B-68, A-34, and A-68. Dimensions include 1.27 TYP. for the pin pitch, 0.7 ± 0.05 for the pin width, and 0.1905 for the pin height. A note indicates "ESD PAD (BE CONNECTED WITH FG)".

4 CARD INSERTION DIRECTION

[illegible]