



## Multi- Aperture cores (2843010302)



Part Number: 2843010302

### 43 MULTI- APERTURE CORE

#### Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- Last digit 2 = Burnished

**Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

All multi- aperture cores are supplied burnished.

Our “Multi- Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

Weight: 18 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	19.45	$\pm 0.40$	0.765	
B	25.4	$\pm 0.70$	1	
C	9.5	$\pm 0.25$	0.375	
E	9.9	$\pm 0.25$	0.39	
H	4.75	$\pm 0.20$	0.187	

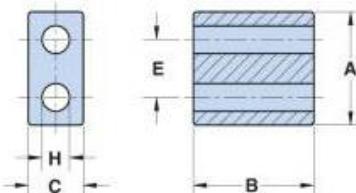


Figure 3

#### Chart Legend

+ Test frequency


Typical Impedance ( $\Omega$ )	
25 MHz	295
100 MHz <sup>+</sup>	400

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and  $A_L$  value. The high frequency 67 material is controlled for  $A_L$  value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

Multi- aperture cores in 73 and 43 material are measured for impedance on the 4193A Vector Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the 4291A Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

The 61 and 67 material multi- hole beads are tested for  $A_L$  value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

**2843010302**

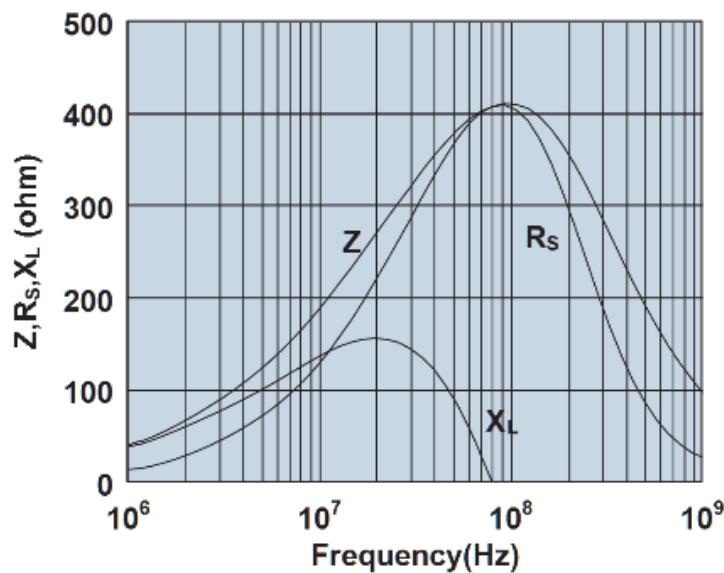

Impedance, reactance, and resistance vs. frequency.

Fair- Rite Products Corp. • One Commercial Row, Wallkill, New York 12589-0288

888-324-7748 • 845-895-2055 • Fax: 845-895-2629 • [ferrites@fair-rite.com](mailto:ferrites@fair-rite.com) • [www.fair-rite.com](http://www.fair-rite.com)