THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
HB	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASE	25OCT2012	HL.C	BH.Y

ELECTRICAL DATA

COIL DATA:

NOMINAL VOLTAGE:	12 VDC
OPERATE VOLTAGE:	9 VDC MAX. @ 25°C
RELEASE VOLTAGE:	1.2 VDC MIN. @ 25°C
RESISTANCE/OHMS:	86 ±10%
OPERATE TIME:	25 MS MAX. INCLUDING BOUNCE
RELEASE TIME:	25 MS MAX. INCLUDING BOUNCE

CONTACT DATA:

ARRANGEMENT:	2 FORM A (DPST-N.O.)
MATERIAL:	SILVER TIN OXIDE
RATING:	30A @ 120/277VAC, RESISTIVE 1.5HP @ 120VAC, 3HP @ 240VAC

MECHANICAL DATA:

MECHANICAL LIFE:	5 MILLION OPERATIONS

ENVIRONMENTAL DATA:

TEMPERATURE RANGE:	STORAGE: -40°C TO +85°C OPERATING: -40°C TO +85°C
DIELECTRIC BREAKDOWN:	4,000V rms, 60Hz. BETWEEN CONTACTS & COIL 1,500V rms, 60Hz. ACROSS OPEN CONTACTS 2,000V rms, 60Hz. BETWEEN POLES

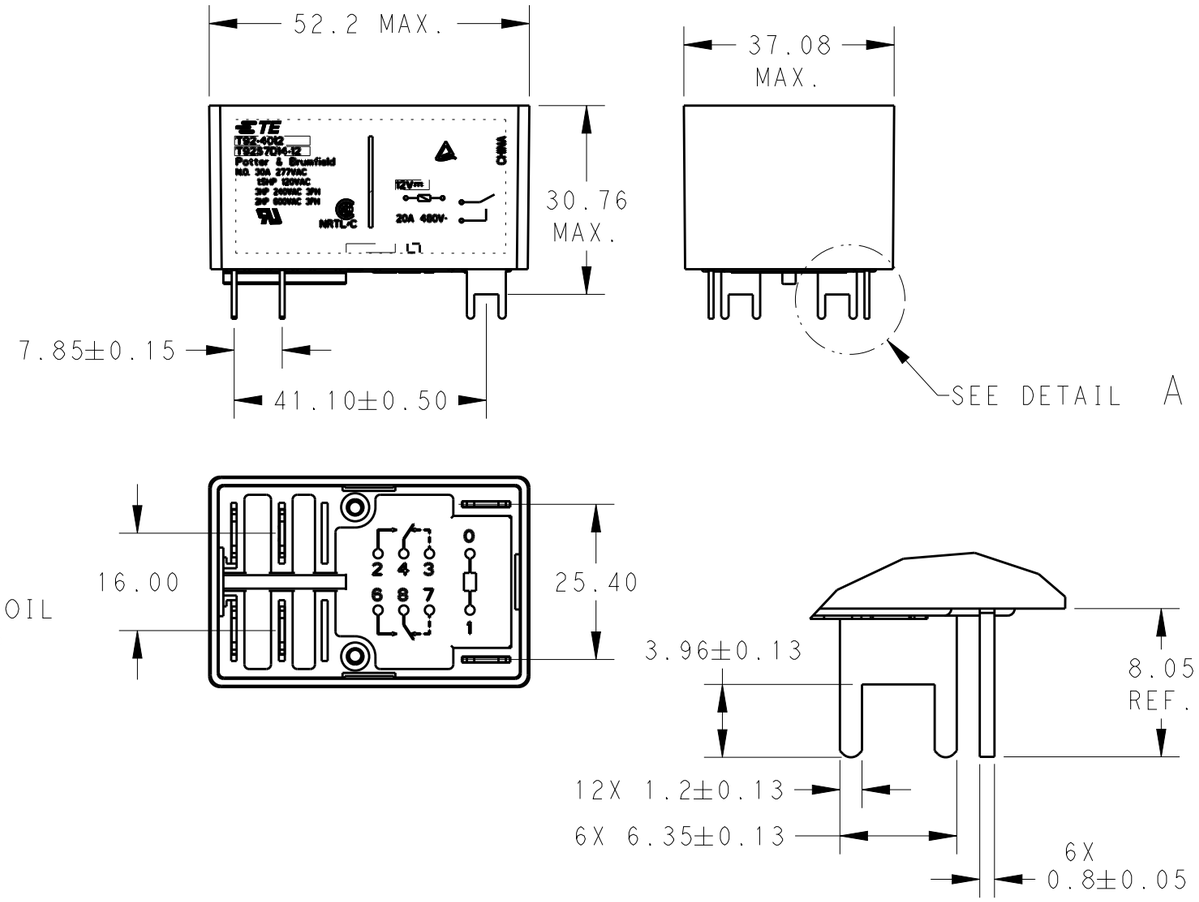





2 FORM A (DPST-N.O.)
WIRING DIAGRAM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±- 1 PLC ±0.5 2 PLC ±0.25 3 PLC ±0.08 4 PLC ±- ANGLES ±1°
MATERIAL -	FINISH -

DWN	TIMOTHY.CHEN
CHK	LINCOLN.YU
APVD	SUNNY.ZHANG
PRODUCT SPEC	-
APPLICATION SPEC	-
WEIGHT	-

TE PART NO.
1-1423008-4

TE Connectivity

NAME
RELAY ASSEMBLY
T92P
-

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-T92-4012	-

Customer Drawing | SCALE - | SHEET 1 OF 1 | REV A

1470-19 (3/11)