



(2,54mm) .100"

TSW, HTSW SERIES

TSW-108-05-L-Q

TSW-116-11-G-S

THROUGH-HOLE .025" SQ POST HEADER

Mates with:

SSW, SSQ, SSM, ESW, ESQ,
BCS, BSW, CES, SLW, IDSD,
IDSS, SMSD, SMSS

SPECIFICATIONS

For complete specifications
see www.samtec.com?TSW

TSW

Insulator Material:

Black Glass Filled
Polyester

Terminal Material:

Phosphor Bronze

Plating:

Au or Sn over 50µ" (1,27µm) Ni

Operating Temp Range:

-55°C to +125°C with Gold

-55°C to +105°C with Tin

Voltage Rating:

550 VAC mated with SSW;

500 VAC mated with

BCS or ESQ;

450 VAC -RA/-RE mated with

BCS or SSM

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave Only




TYPE STRIP

TSW = Standard Strip


HTSW = Hi-Temp Strip

PIN CENTERS

-1 = .100" (2,54mm) Centers,
All Positions Filled



-2 = .200" (5,08mm) Centers,
Every Other Position Filled



NO. PINS PER ROW

CURRENT RATING						
AMBIENT TEMP	TSW mated with					
	ESW	SSW	SLW	SSQ	SSM	BCS
20°C	6.9A	6.9A	7.1A	7.6A	6.9A	5.9A
40°C	6A	6.1A	6.2A	6.9A	6A	5.2A
60°C	5.3A	5.3A	5.8A	5.9A	5.3A	4.7A
95°C	3.5A	3.5A	3.7A	3.9A	3.5A	3A

6 POSITIONS (2x3) POWERED

SPECIFICATIONS

For complete specifications
see www.samtec.com?HTSW

HTSW

Same as TSW

except:


Insulator Material:

Natural Liquid Crystal Polymer



ALSO AVAILABLE

Shunts.
See
SNT
Series




Note: Some lengths,
styles and options are
non-standard, non-returnable.

APPLICATIONS




HORIZONTAL

Straight Pin Versions

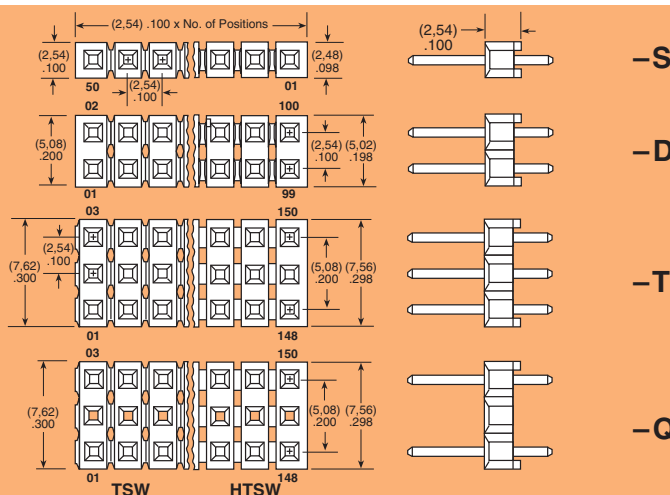

01
thru
50
= .100" (2,54mm)
Center Version

Right Angle Versions

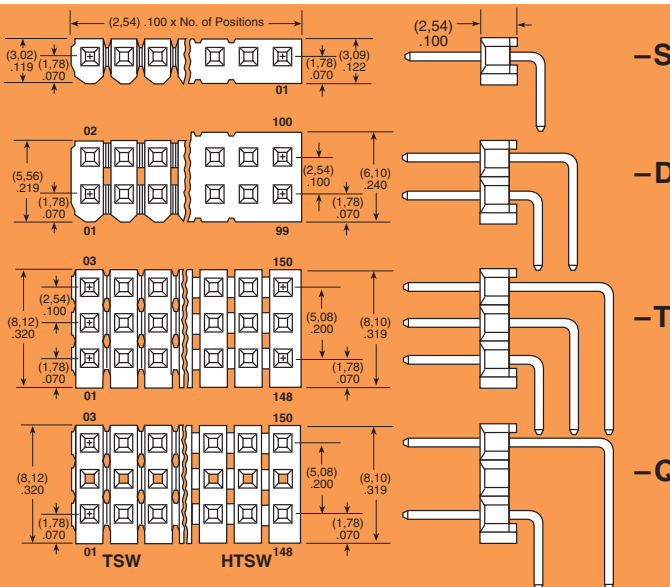


02
thru
25
= .200" (5,08mm)
Center Version

Due to technical progress, all designs, specifications and components are subject to change without notice.



WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683


TSW-109-10-F-D-RA



TSW-112-07-G-T



TSW-120-13-L-D



TSW-112-16-T-S-RE

LEAD
STYLEPLATING
OPTIONROW
OPTION

OTHER OPTIONS

-F

= Gold flash on post, Matte Tin on tail

-L

= 10µ" (0,25µm) Gold on post, Matte Tin on tail

-G

= 10µ" (0,25µm) Gold on post, Gold flash on balance

-T

= Matte Tin

-SS

= 30µ" (0,76µm) Gold stripe on contact area,
Gold flash to tip, Matte Tin on tail
(Mates with SSW, SSQ, SSM, ESW, ESQ, BCS only)
(Straight lead styles -07, -08, -09 and Right Angle (-RA) -08 only)

Specify
-SS for
cost-effective
heavy Gold
where it
counts!

Note: Other Gold plating options available. Contact Samtec.

-S

= Single Row

-D

= Double Row

-T


= Triple Row

-Q

= Double Row
(5,08mm)
.200" row
space

-RA or -RE

= Right Angle



(1,27) .050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

-NA
= Right Angle
(using straight body for coplanar
mating with SSW-RA series)



(1,27) .050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050

.050


.050

.050

.050

-LC

= Locking Clip
(Styles -08 thru
-13 & -22 only)



Requires 4 pin minimum (NA with -T, -Q, -RA or -RE)

-LA

= -RA Option
with -LL Option

-“XXX”


= Polarized Position

Straight Pin Versions

(Specify “LEAD STYLE” from chart)

STYLE	A	B	C
* -05	(3,30) .130	(8,51) .335	(2,67) .105
* -06	(2,41) .095	(7,62) .300	(2,67) .105
* -07	(2,54) .100	(10,92) .430	
* -08	(5,08) .200	(13,46) .530	
-09	(10,16) .400	(18,54) .730	(5,84) .230
-10	(12,70) .500	(23,62) .930	
-11	(15,24) .600	(26,16) .1030	
-12	(17,78) .700	(28,70) .1130	
-13	(22,86) .900	(31,24) .1230	
-14	(2,79) .110	(13,46) .530	(8,13) .320
* -15		(18,54) .730	(13,21) .520
* -16	(7,87) .310		(8,13) .320
* -17	(2,79) .110	(21,08) .830	(15,74) .620

* Available with -LL
(Locking Lead) Option



Specify -07 for best mate with IDXX Series IDC Cable

STYLE	A	B	C
* -18		(23,62) .930	(18,29) .720
* -19	(2,79) .110	(26,16) .1030	(20,83) .820
* -20		(31,24) .1230	(25,91) .1020
* -21		(36,32) .1430	(30,99) .1220
* -22	(7,62) .300	(16,00) .630	(5,84) .230
* -23	(2,92) .115	(11,30) .445	
* -24		(12,15) .480	(6,73) .265
* -25	(5,33) .210	(16,00) .630	(8,13) .320
▲ -26	(3,20) .126	(11,58) .456	
-27	(25,40) .1000	(33,78) .1330	(5,84) .230
-28	(20,32) .800	(28,70) .1130	
-29	(23,11) .910	(33,78) .1330	(8,13) .320
-30	(18,03) .035	(28,70) .1130	
-41+	(0,89) .035	(9,27) .365	(5,84) .230
-42+	(1,27) .050	(11,94) .470	(8,13) .320

+ Style -41 & -42 available
with HTSW only.

▲ Except: Style -26
(0,46) .018 DIA Tail

Right Angle Versions

(Specify “LEAD STYLE” from chart and select -RA or -RE from other options)


-RA LEAD STYLE	SINGLE (-S) A C	DOUBLE (-D) A	TRIPLE (-T & -Q) A
-08	(2,29) .090	(2,29) .090	(2,29) .090
-09	(7,37) .290	(7,37) .290	(7,37) .290
-10	(9,91) .390	(9,91) .390	(9,91) .390
-11	(12,45) .490	(12,45) .490	(12,45) .490
-12	(14,99) .590	(14,99) .590	(14,99) .590
-13	(20,07) .790	(20,07) .790	N/A
* -16	(5,08) .200	(8,13) .320	(5,08) .200
-21	(25,15) .990	(5,84) .230	N/A
* -22	(4,83) .190	(4,83) .190	(4,83) .190
* -25	(2,54) .100	(8,13) .320	(2,54) .100
-27	(22,61) .890	(5,84) .230	N/A
-28	(17,53) .690	(17,53) .690	N/A
-29	(20,32) .800	(8,13) .320	N/A
-30	(15,24) .600	(15,24) .600	

-RE LEAD STYLE	SINGLE A	C
-09	(4,83) .190	
-10	(7,37) .290	
-11	(9,91) .390	(5,84) .230
-12	(12,45) .490	
-13	(17,53) .690	
-16	(2,54) .100	(8,13) .320
-21	(22,61) .890	
-22	(2,29) .090	(5,84) .230
-27	(20,07) .790	
-28	(14,99) .590	


* Available with -LA
(Locking Lead) Option

ALSO
AVAILABLE

Elevated Right
Angle option.
Call Samtec.



LEAD STYLE	B
-RA	(1,52) .060
-RE	(4,06) .160

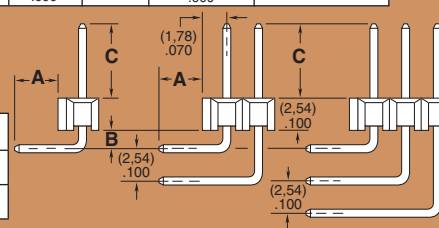

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC NORTHERN CALIFORNIA • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292
SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683