

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

©

 COPYRIGHT 2005

BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.





LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		O	RELEASED PER OSI3-0027-05	27NOV05	GP	JG
			O1	REVISED PER ECO-09-025699	11DEC2009	KK	AEG

D

C

B
WAS T&B 1406295-SALE

A

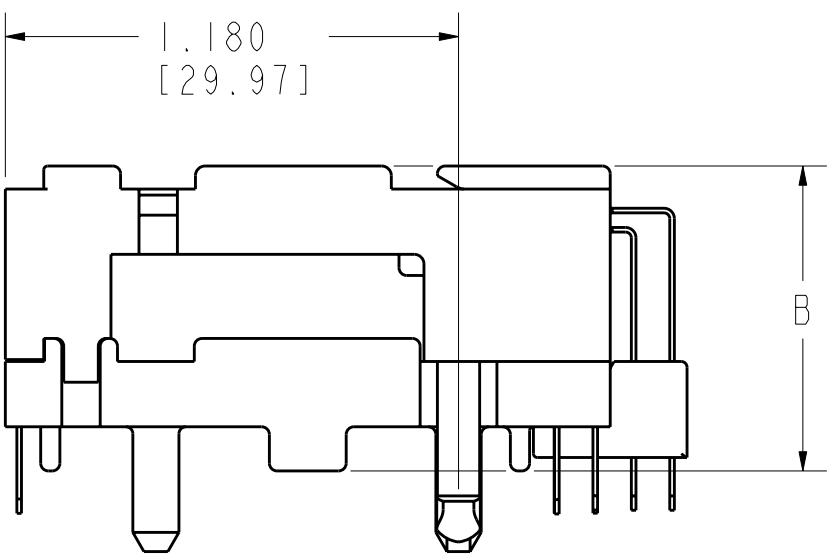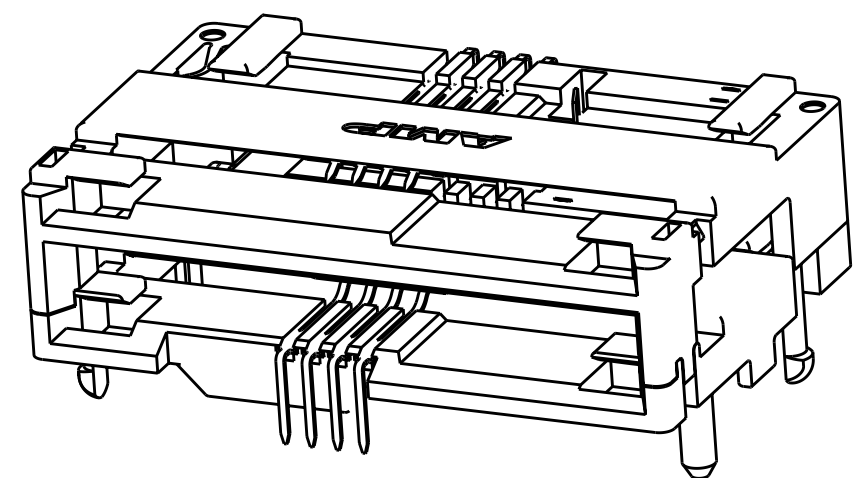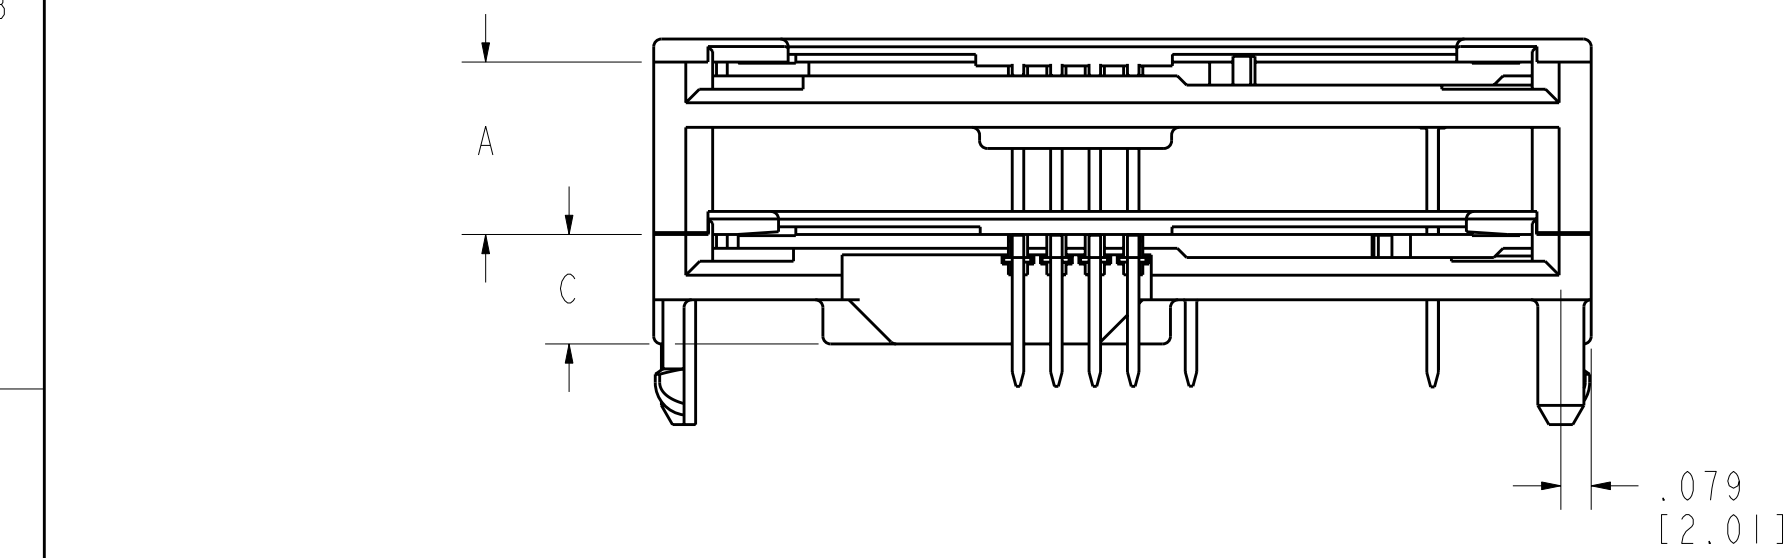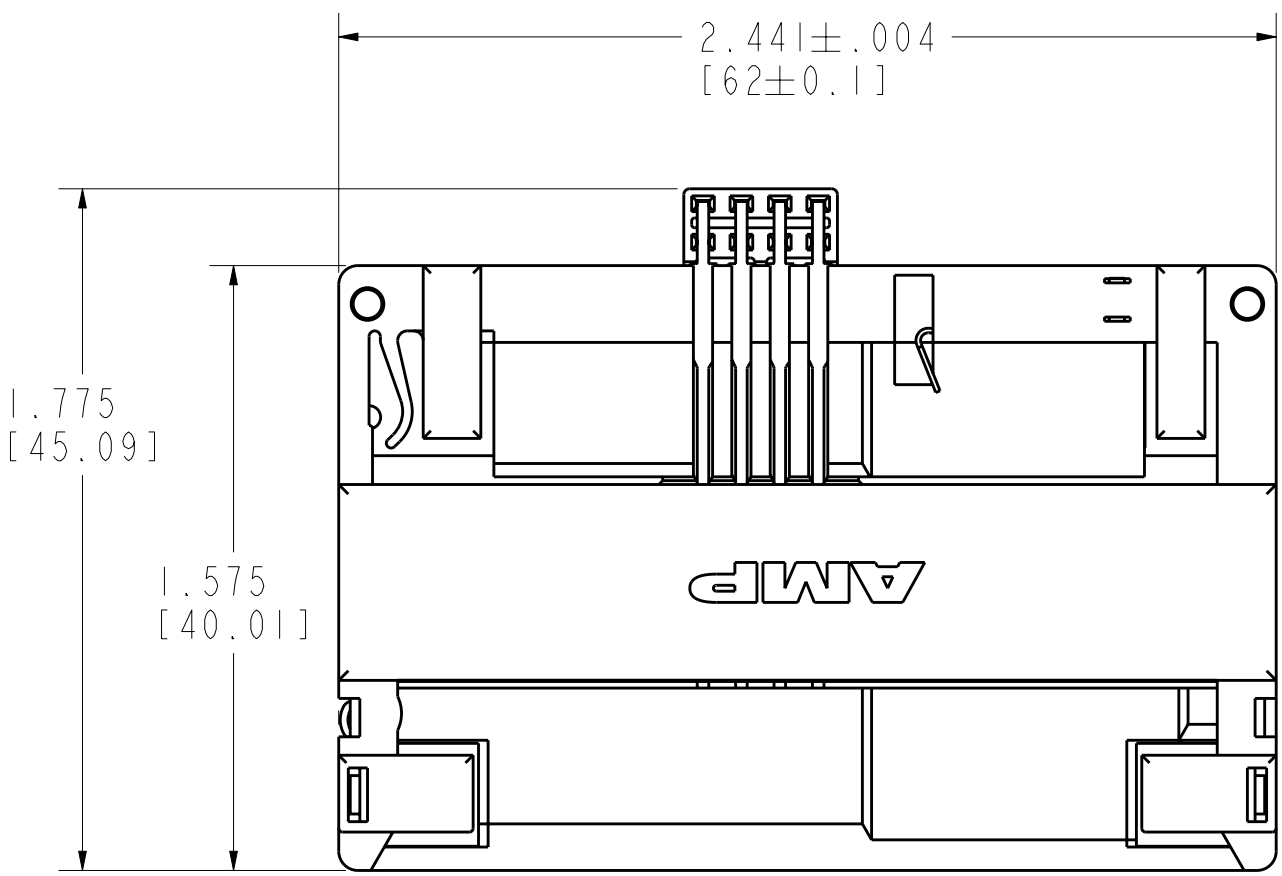

- 1

MATERIAL:
- HOUSING - PBT, 30% GLASS FILLED, BLACK
- 2

CONTACT - PHOSPHOR BRONZE
- CONTACT PLATING - GOLD IN MATING AREA
- (SEE TABLE FOR THICKNESS), OVER 50
- MICROINCHES NICKEL; 100 MICROINCHES
- TIN ON SOLDER TAILS.
3.

SWITCH STYLE - NORMALLY CLOSED.
- 4

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
- PER D.RENAUD/D.SINISI

D



C

B


A

4	OBSOLETE	30 MICROINCHES	.285 [7.24]	.970 [24.64]	.625 [15.88]	6369097-3
		100 MICROINCHES	.285 [7.24]	.794 [20.17]	.449 [11.4]	6369097-2
		30 MICROINCHES	.285 [7.24]	.794 [20.17]	.449 [11.4]	6369097-1
		GOLD PLATING THICKNESS	C	B	A	PART NO.
TYCO ELECTRONICS CORPORATION CONTROLLING ENGINEERING ORGANIZATION LATEST REVISION.		DWN G. PETERS 27NOV05	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK D. GORENC 27NOV05	NAME STACKED ASSEMBLY, SMART CARD READER			
LC ±- LC ±- LC ±- LC ±.005 LES ±- ISH ±-		APVD M. WALMSLEY 27NOV05				
PRODUCT SPEC -		NAME				
APPLICATION SPEC -		SIZE A2				
		WEIGHT -	CAGE CODE 00779	DRAWING NO C=6369097	RESTRICTED TO -	
		CUSTOMER DRAWING			SCALE 2:1	SHEET 1 OF 2
					REV 01	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		-	SEE SHEET 1	-	-	-

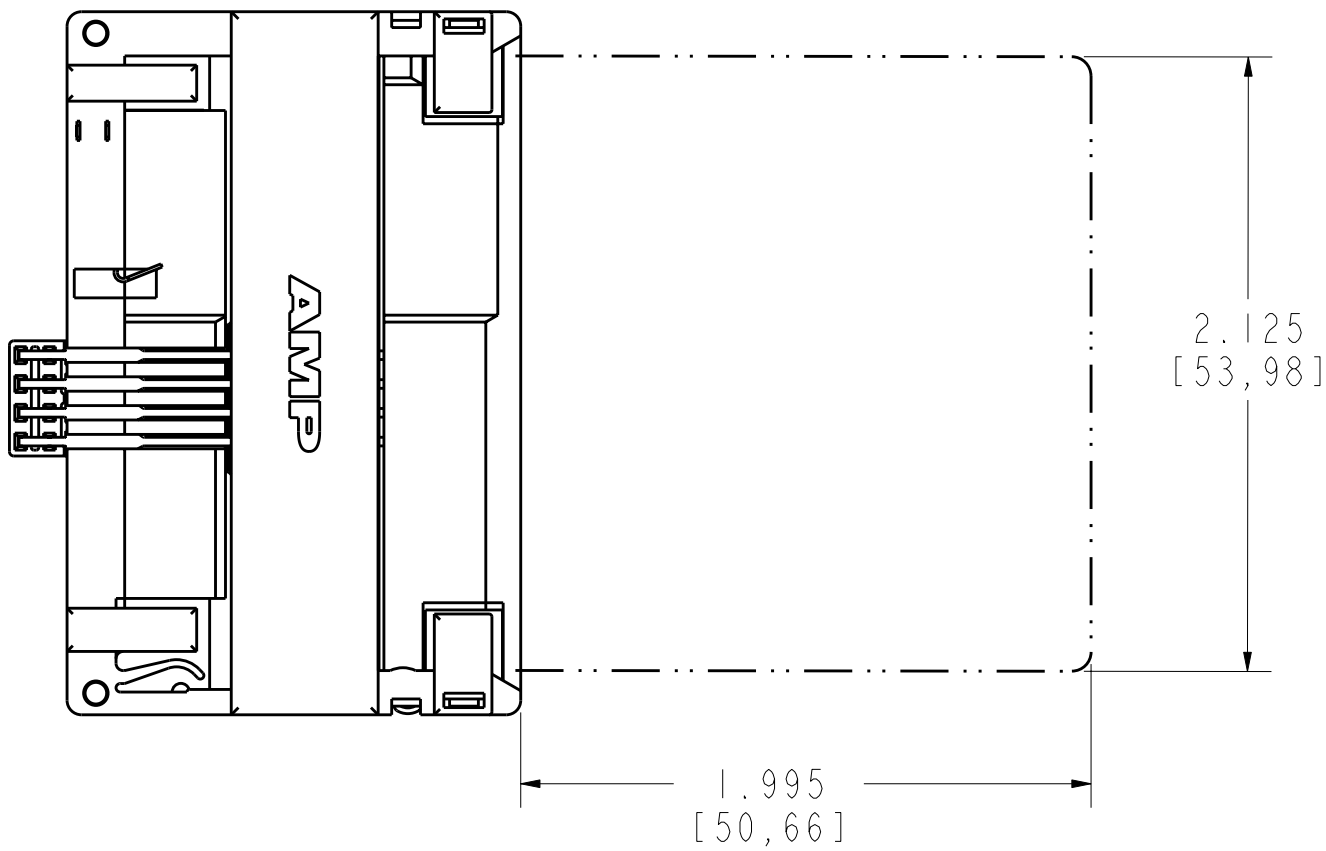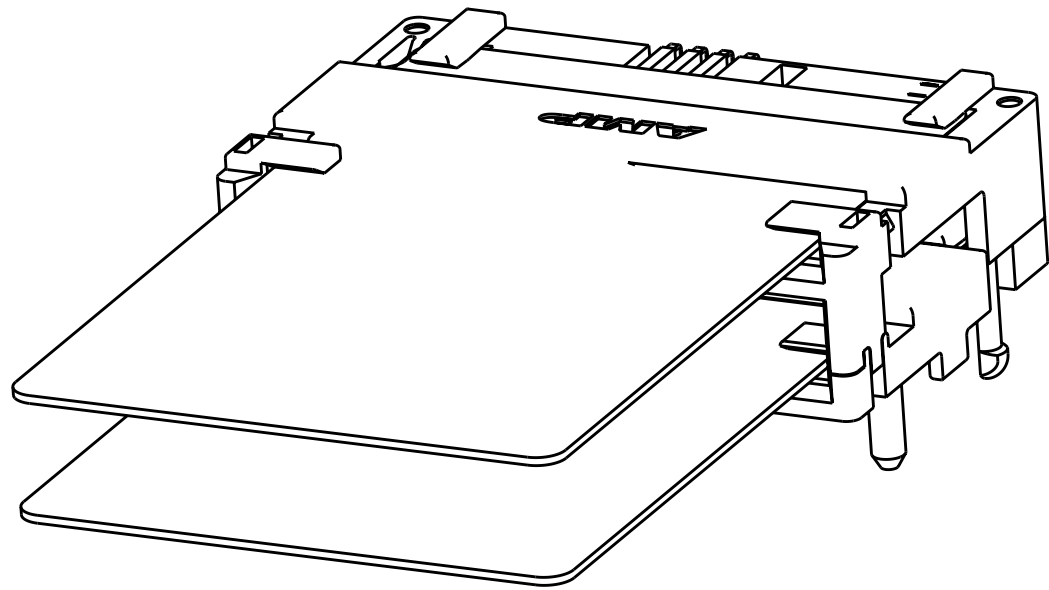

SMART CARDS SHOWN FULLY INSERTED.
DIMENSIONS ARE IN ACCORDANCE WITH
ISO 7810 - 7816 (0.030" THICKNESS).

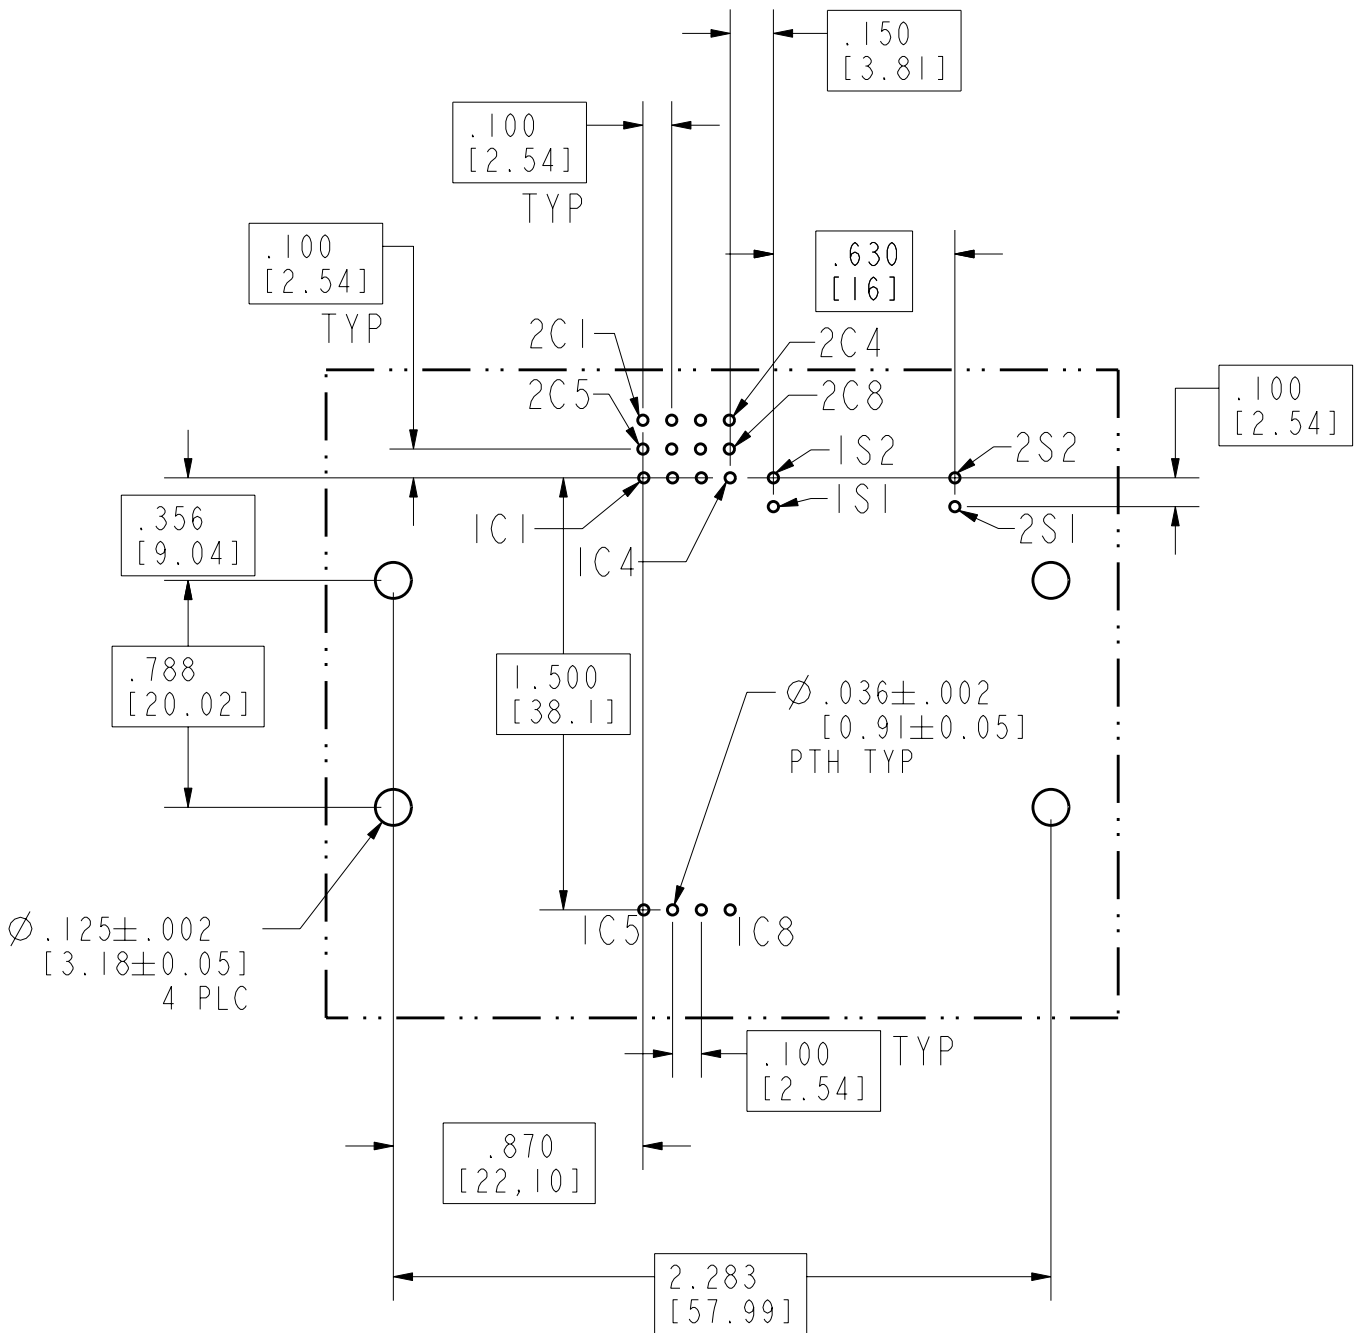

RECOMMENDED PCB LAYOUT (.062 THICK),
COMPONENT SIDE

POSITION TOLERANCE ON ALL HOLES: $\varnothing \pm .006$ [0.15]