



SAW Components

Data Sheet B7707

Data Sheet

An abstract, grayscale background graphic featuring a globe with a grid of latitude and longitude lines. Overlaid on the globe is a large, stylized, 3D-effect word "EPCOS" in a light gray color. The word is tilted and appears to be floating or emerging from the globe. The overall image has a soft, ethereal quality with some light flares and a dark, textured background.

EPCOS



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet




Chip sized SAW package DCS4C

Features

- Low-loss RF filter for mobile telephone EGSM systems, receive path
- Low amplitude ripple
- Usable passband 35 MHz
- No matching network required for operation at 50 Ω
- Package for Surface Mounted Technology (SMT)

Terminals


- Ni, gold-plated

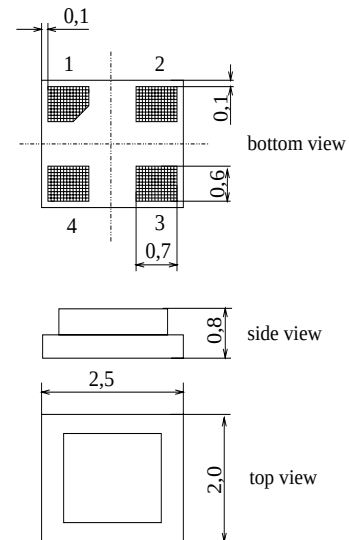

Dimensions in mm, approx. weight 0,015g

Pin configuration

- | | |
|-----|--------|
| 1 | Input |
| 3 | Output |
| 2,4 | Ground |

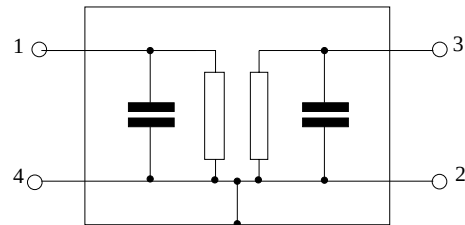

Type	Ordering code	Marking and Package according to	Packing according to
B7707	B39941-B7707-C510	C61157-A7-A80	F61074-V8111-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 / + 85	$^{\circ}\text{C}$	source and load impedance 50 Ω peak power of GSM signal, duty cycle 1 : 8 duty cycle 4 : 8 continuous wave
Storage temperature range	T_{stg}	- 40 / + 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
Input power max. 880...915 MHz	P_{IN}	15	dBm	
		12	dBm	
elsewhere		0	dBm	



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50 \text{ } \Omega$
Terminating load impedance: $Z_L = 50 \text{ } \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	2,8	3,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,0	1,6	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR					
925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss					
925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase					
1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α				
0,0 ... 750,0 MHz		50	66	—	dB
750,0 ... 800,0 MHz		46	69	—	dB
800,0 ... 880,0 MHz		45	44	—	dB
880,0 ... 905,0 MHz		31	60	—	dB
905,0 ... 915,0 MHz		17	33	—	dB
980,0 ... 982,0 MHz		23	26	—	dB
982,0 ... 1005,0 MHz		23	29	—	dB
1005,0 ... 1025,0 MHz		30	52	—	dB
1025,0 ... 1035,0 MHz		35	54	—	dB
1035,0 ... 1760,0 MHz		40	55	—	dB
1760,0 ... 3120,0 MHz		30	38	—	dB
3120,0 ... 4000,0 MHz		18	26	—	dB
4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20^{\circ}\text{C}$ to $+75^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
925,0 ... 960,0 MHz		—	3,0	3,5	dB
Amplitude ripple (p-p)	$\Delta\alpha$				
925,0 ... 960,0 MHz		—	1,2	1,8	dB
Input VSWR					
925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR					
925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss					
925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase					
1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α				
0,0 ... 750,0 MHz		50	66	—	dB
750,0 ... 800,0 MHz		46	69	—	dB
800,0 ... 880,0 MHz		45	44	—	dB
880,0 ... 905,0 MHz		31	60	—	dB
905,0 ... 915,0 MHz		17	24	—	dB
980,0 ... 982,0 MHz		22	25	—	dB
982,0 ... 1005,0 MHz		23	27	—	dB
1005,0 ... 1025,0 MHz		30	52	—	dB
1025,0 ... 1035,0 MHz		35	54	—	dB
1035,0 ... 1760,0 MHz		40	55	—	dB
1760,0 ... 3120,0 MHz		30	38	—	dB
3120,0 ... 4000,0 MHz		18	26	—	dB
4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30^{\circ}\text{C}$ to $+80^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	3,0	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	1,2	2,3	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss						
	925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase						
	1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α					
	0,0 ... 750,0 MHz		50	66	—	dB
	750,0 ... 800,0 MHz		46	69	—	dB
	800,0 ... 880,0 MHz		45	44	—	dB
	880,0 ... 905,0 MHz		31	60	—	dB
	905,0 ... 915,0 MHz		15	23	—	dB
	980,0 ... 982,0 MHz		21	24	—	dB
	982,0 ... 1005,0 MHz		23	27	—	dB
	1005,0 ... 1025,0 MHz		30	52	—	dB
	1025,0 ... 1035,0 MHz		35	54	—	dB
	1035,0 ... 1760,0 MHz		40	55	—	dB
	1760,0 ... 3120,0 MHz		30	38	—	dB
	3120,0 ... 4000,0 MHz		18	26	—	dB
	4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707

Low-Loss Filter for Mobile Communication

942,50 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -30^{\circ}\text{C}$ to $+85^{\circ}\text{C}$

Terminating source impedance: $Z_S = 50\ \Omega$

Terminating load impedance: $Z_L = 50\ \Omega$

			min.	typ.	max.	
Center frequency	f_C		—	942,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	925,0 ... 960,0 MHz		—	3,0	4,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	925,0 ... 960,0 MHz		—	1,2	2,3	dB
Input VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,3	
Output VSWR						
	925,0 ... 960,0 MHz		—	2,0	2,2	
Input return loss						
	925,0 ... 960,0 MHz		8,0	9,0	—	dB
Input return loss phase						
	1842,5 MHz		-150,0	-140,0	-130,0	°
Attenuation	α					
	0,0 ... 750,0 MHz		50	66	—	dB
	750,0 ... 800,0 MHz		46	69	—	dB
	800,0 ... 880,0 MHz		45	44	—	dB
	880,0 ... 905,0 MHz		31	60	—	dB
	905,0 ... 915,0 MHz		12	22	—	dB
	980,0 ... 982,0 MHz		21	24	—	dB
	982,0 ... 1005,0 MHz		23	27	—	dB
	1005,0 ... 1025,0 MHz		30	52	—	dB
	1025,0 ... 1035,0 MHz		35	54	—	dB
	1035,0 ... 1760,0 MHz		40	55	—	dB
	1760,0 ... 3120,0 MHz		30	38	—	dB
	3120,0 ... 4000,0 MHz		18	26	—	dB
	4000,0 ... 6000,0 MHz		8	18	—	dB



SAW Components

B7707


Low-Loss Filter for Mobile Communication

942,50 MHz


Data Sheet



Transfer function (+25 C specification)

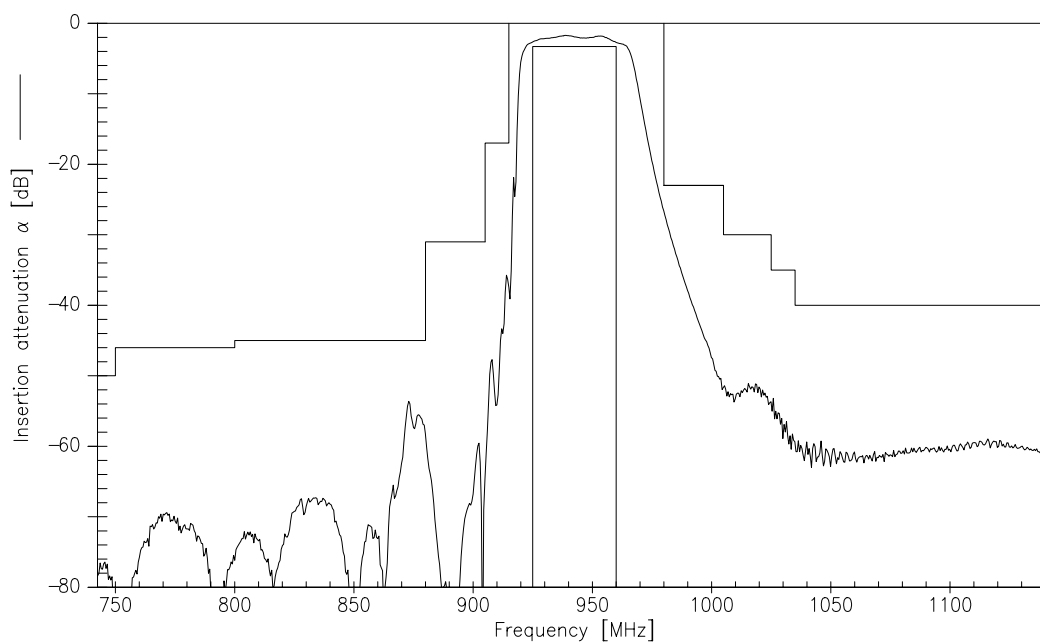

Transfer function (wideband)

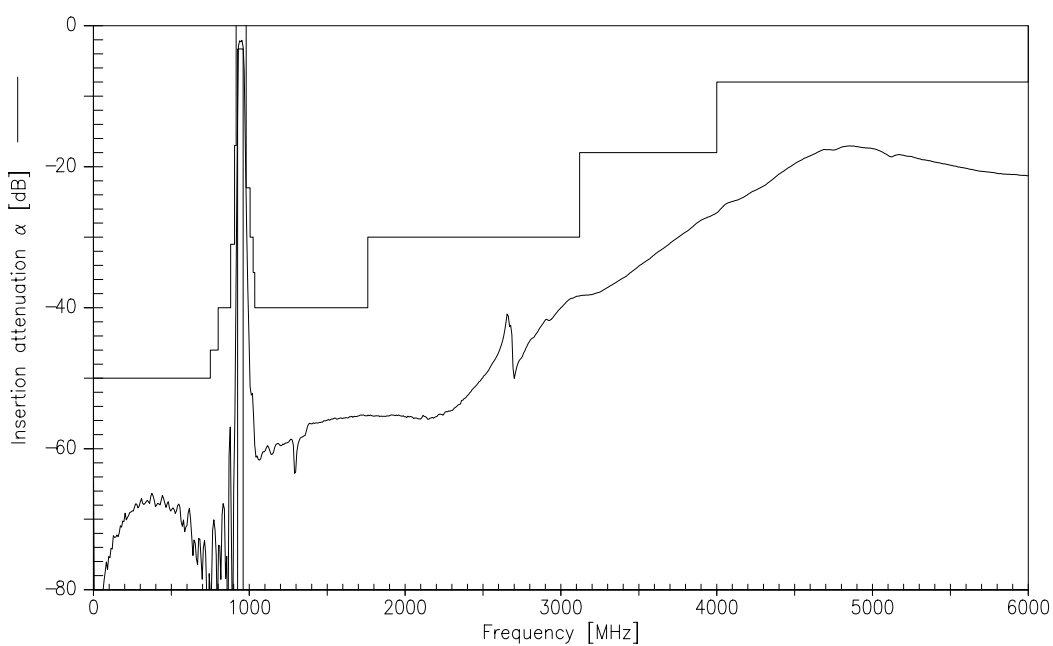



SAW Components	B7707
Low-Loss Filter for Mobile Communication	942,50 MHz
Data Sheet	SMD

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 2000. All Rights Reserved. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

The information contained in this brochure describes the type of component and shall not be considered as guaranteed characteristics. Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.