


NOTES:

- 1 - THIS PART TO BE THERMOSET PLASTIC COATED, USE APPROVED FR# 9677182209.
- 2 - COATED BOBBIN TO WITHSTAND A MINIMUM BREAKDOWN VOLTAGE OF 500 Vrms.
- 3 - COATING THICKNESS = 0.25mm [.010"] MAX.
- 4 - PACKAGING: 94 PIECES/FOAM TRAY [PKG-436], 4 TRAYS/F2 [PKG-106] = 376 PIECES/CARTON.

SIZE	PART NO.	REV.
B	9677182208	7

2X .016 [.161] DIA.
X 2.71 [.108] DIA. (DEPTH)

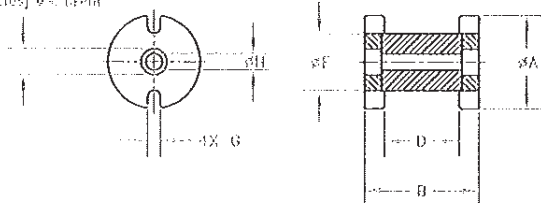

A Max.	B Max.	D Min.	F Max.	G Min.	H Min.
18.95	23.20	13.65	11.80	1.70	2.60
.746	.913	.538	.464	.067	.103

AFTER COATING

UNCONTROLLED COPY WHEN PRINTED

ELECTRICAL SPECIFICATIONS

AL (nH) ±10%	AL (nH) Min.
65	55 @ NI=410
AL VALUE MEASURED @ 1 kHz, 1 Volt WITH N=95 #22 AWG @ 23°C	

SEE SOP# ELC-33

Bold numbers are in millimeters,** light numbers are in inches.

5	C-0793	UPDATED ELECTRICAL SPECIFICATIONS	D.S.	06-23-09
4	B-4237	COATING THICKNESS WAS 0.125mm [.005"] MAX.	D.S.	06-11-03
3	B-1286	CHANGED DIMENSIONAL NOMENCLATURE PER 14th CATALOG	S.Z.	09-25-01
2	B-184	CHANGED COATING THICKNESS NOTE	J.J.	03-15-01
1	9-1755	BREAKDOWN VOLTAGE WAS 1000 Vrms	S.Z.	11-17-99
REV.	ECN	DESCRIPTION	DR/T	DATE
REVISIONS				
APPLICABLE SPECS		GRADING CLASS	FAIR-RITE PRODUCTS CORP.	
Tolerances Unless Otherwise Indicated		MATERIAL	TITLE	
FR# 77		FINISH	COATED BOBBIN	
2PL 2PL 2PL		DESIGN BY S. ZIMOSKY	DATE 01-07-1999	SIZE PART NO.
FRAGILE ANGLE		DESIGN BY		B 9677182208
		SCALE	NONE	SHEET 1 of 1

7	C-3020	ADDED RECESS SPECIFICATIONS	D.S.	06-08-12
6	C-2782	ADDED PACKAGING NOTE	D.S.	02-09-12
REV.	ECN	DESCRIPTION	DR/T	DATE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fair-Rite:

9677182208