


*NEW Product*

- 60 A output current<sup>(7)</sup>
- 3.3/5 V input voltage (2.95 Vdc to 5.5 Vdc)
- Wide-output voltage adjust (0.8 Vdc to 2.5 Vdc)
- Auto-track™ sequencing\*
- Margin up/down controls
- Efficiencies up 93%
- Output ON/OFF inhibit
- Differential remote sense
- Programmable input Under-Voltage Lockout (UVLO)
- Point-of-Load-Alliance (POLA) compatible
- Available RoHS compliant

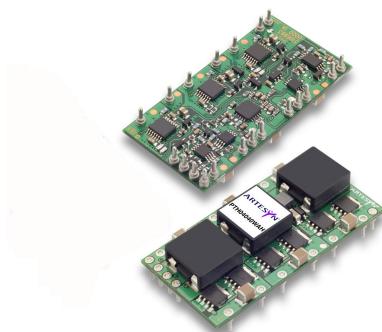

2 YEAR WARRANTY

The PTH04040 is a next generation series of non-isolated dc-dc converters offering some of the most advanced POL features available in the industry. The primary new feature provides for sequencing between multiple modules, a function, which is becoming a necessity for powering advanced silicon including DSP's, FPGA's and ASIC's requiring controlled power-up and power-down. Other industry leading features include margin up/down controls and efficiencies up to 96%. The PTH04040 has an input voltage of 2.95 Vdc to 5.5 Vdc and offers a wide 0.8 Vdc to 2.5 Vdc output voltage range with up to 60 A output current, which allows for maximum design flexibility and a pathway for future upgrades.

*All specifications are typical at nominal input, full load at 25 °C unless otherwise stated  
C<sub>in</sub> = 1000 µF, C<sub>out</sub> = 660 µF*

## SPECIFICATIONS

### OUTPUT SPECIFICATIONS

Voltage adjustability	2.95 ≤ V <sub>i</sub> ≤ 4.5 V 4.50 ≤ V <sub>i</sub> ≤ 5.5 V	0.8-1.65 Vdc 0.8-2.5 Vdc
Setpoint accuracy	(See Note 1)	±2.0% V <sub>o</sub>
Line regulation		±5 mV typ.
Load regulation		±5 mV typ.
Total regulation	(See Note 1)	±3.0% V <sub>o</sub>
Minimum load		0 A
Ripple and noise	20 MHz bandwidth	15 mV typ.
Transient response (See Note 4)		100 µs recovery time Overshoot/undershoot 200 mV
Margin adjustment	(See Note 8)	±5.0% V <sub>o</sub>

### EMC CHARACTERISTICS

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

### GENERAL SPECIFICATIONS

Efficiency	See Table on page 2	93% max.
Insulation voltage		Non-isolated
Switching frequency		825 MHz
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	(L x W x H)	51.94 x 26.54 x 9.07 mm 2.045 x 1.045 x 0.357 in
Weight		22.5 g (79 oz)
MTBF	Telcordia SR-332	2,100,000 hours

### ENVIRONMENTAL SPECIFICATIONS

Thermal performance	Operating ambient, temperature Non-operating	-40 °C to +85 °C -40 °C to +125 °C
MSL ('Z' suffix only)	JEDEC J-STD-020C	Level 3

### PROTECTION

Overcurrent	Auto reset	90 A
Thermal		Auto recovery

### International Safety Standard Approvals

**cUL us** UL/cUL CAN/CSA-C22.2 No. 60950  
File No. E174104



TÜV Product Service (EN60950) Certificate No. B 04 06 38572 044  
CB Report and Certificate to IEC60950, Certificate No. US/8292/UL

\*Auto-track™ is a trade mark of Texas Instruments

OUTPUT POWER (MAX.)	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (MIN.)	OUTPUT CURRENT (MAX.) <sup>(7)</sup>	EFFICIENCY (MAX.)	REGULATION		MODEL NUMBER <sup>(9,10)</sup>
						LINE	LOAD	
150 W	2.95-5.5 Vdc	0.8-2.5 Vdc	0 A	60 A	93%	±5 mV	±5 mV	PTH04040W

Part Number System with Options

**PTH04040WAS**

Product Family  
Point of Load Alliance  
Compatible

Input Voltage  
04 = 2.95 Vdc to 5.5 Vdc

Output Current  
04 = 60 A

Mechanical Package  
Always 0

Mounting Option<sup>(9)</sup>  
D = Horizontal Through-Hole (Matte Sn)  
H = Horizontal Through-Hole (Sn/Pb)  
S = Surface-Mount (63/37 Sn/Pb  
pin solder material)  
Z = Surface-Mount (96.5/3.0/0.5 Sn/Ag/Cu  
pin solder material)

Pin Option  
A = Through-Hole Std. Pin Length (0.140")  
A = Surface-Mount Tin/Lead Solder Ball

Output Voltage Code  
W = Wide

**Output Voltage Adjustment of the PTH04040W Series**

The ultra-wide output voltage trim range offers major advantages to users who select the PTH04040W. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 2.5 Vdc. When the PTH04040W converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

**Notes**

- 1 The set-point voltage tolerance is affected by the tolerance and stability of  $R_{SET}$ . The stated limit is unconditionally met if  $R_{SET}$  has a tolerance of 1% with 100 ppm/ $^{\circ}$ C or better temperature stability.
- 2 This control pin has an internal pull-up to Vin nominal. If it is left open-circuit the module will operate when input power is applied. A small low-leakage (<100 nA) MOSFET is recommended for control. For further information, consult Application Note 192.
- 3 A 1000  $\mu$ F input capacitor is required for proper operation. The capacitor must be rated for a minimum of 400 mA rms of ripple current.
- 4 This is with a 1 A/ $\mu$ s loadstep, 50 to 100%  $I_{max}$ :  $C_0 = 660 \mu$ F.
- 5 The minimum input voltage is 2.95 V or  $1.34 \times V_o$ , whichever is greater.
- 6 These are default voltages. They may be adjusted using the 'UVLO Prog.' control input. Consult Application Note 192 for further details.
- 7 See Figures 1 and 2 for safe operating curves. All power pins must be used.
- 8 A small low-leakage (<100 nA) MOSFET is recommended to control this pin. The opencircuit voltage is less than 1 Vdc.
- 9 To order Pb-free (RoHS compatible) surface-mount parts replace the mounting option 'S' with 'Z', e.g. PTH04040WAZ. To order Pb-free (RoHS compatible) through-hole parts replace the mounting option 'H' with 'D', e.g. PTH04040WAD.
- 10 NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/powergroup/products.htm> to find a suitable alternative.

**EFFICIENCY TABLE ( $I_o = 45A$ )  $V_{in} = 5 V$**

OUTPUT VOLTAGE	EFFICIENCY
$V_o = 2.5 V$	93%
$V_o = 1.8 V$	90%
$V_o = 1.5 V$	88%
$V_o = 1.2 V$	86%

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

*NEW Product*

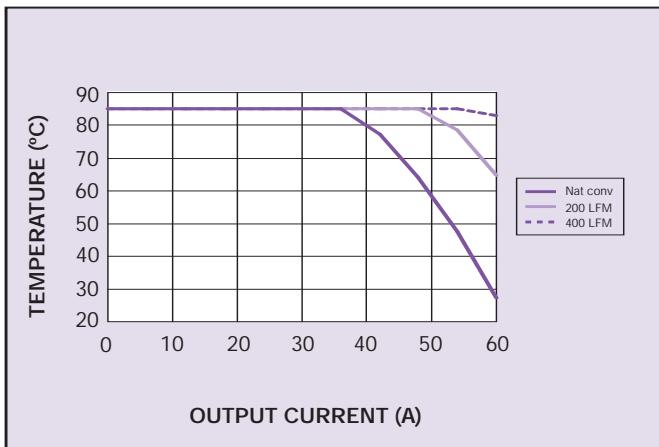


Figure 1 - Safe Operating Area  
Vin = 3.3 V (See Note A)

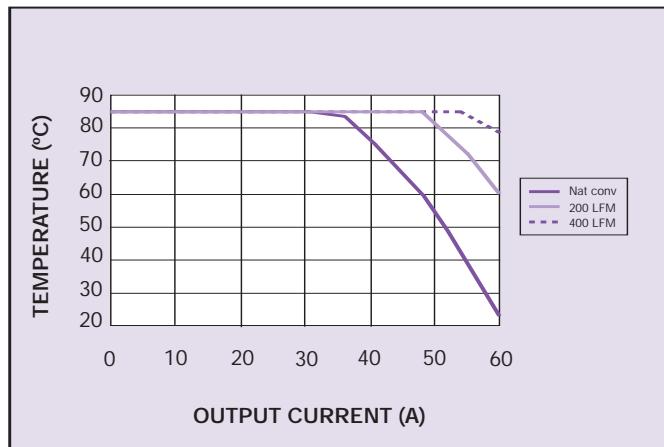


Figure 2 - Safe Operating Area  
Vin = 5 V (See Note A)

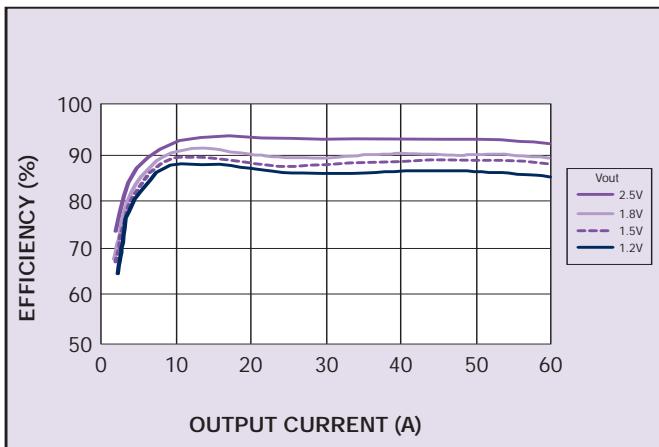


Figure 3 - Efficiency vs Load Current  
Vin = 5 V (See Note B)

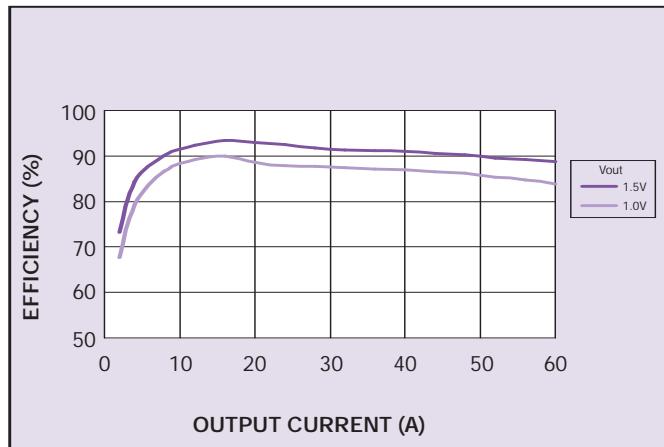


Figure 4 - Efficiency vs Load Current  
Vin = 3.3 V (See Note B)

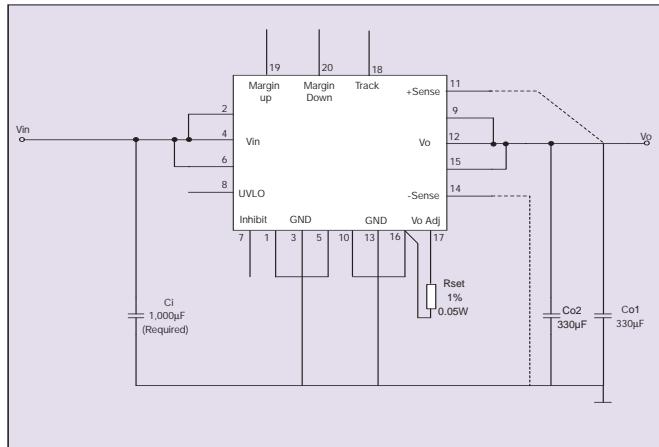


Figure 5 - Standard Application

#### Notes

A SOA curves represent the conditions at which internal components are within the Artesyn derating guidelines.  
 B Characteristic data has been developed from actual products tested at 25 °C. This data is considered typical data for the converter.

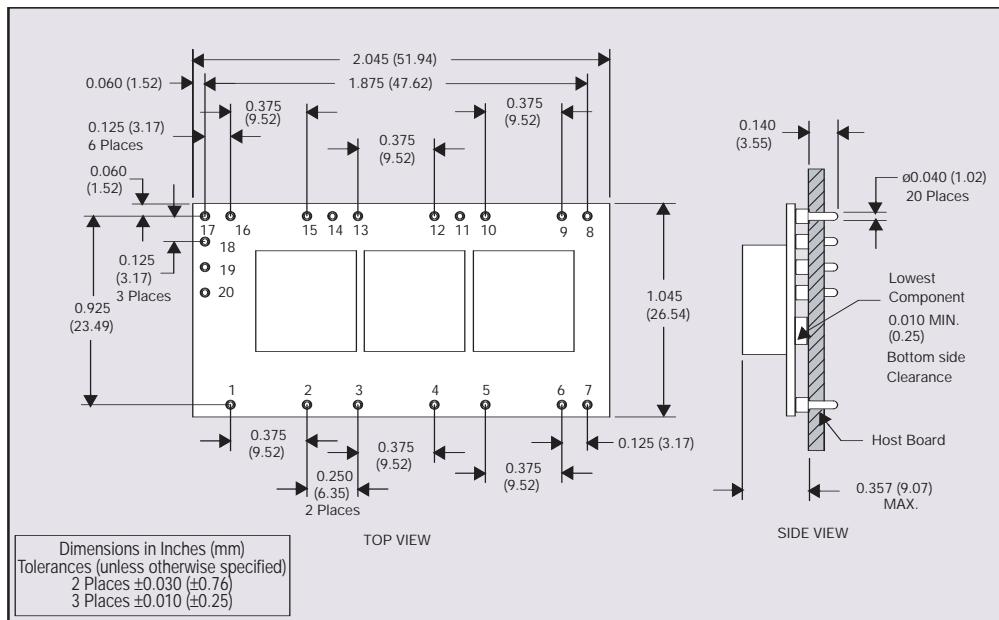


Figure 6 - Plated Through-Hole Mechanical Drawing

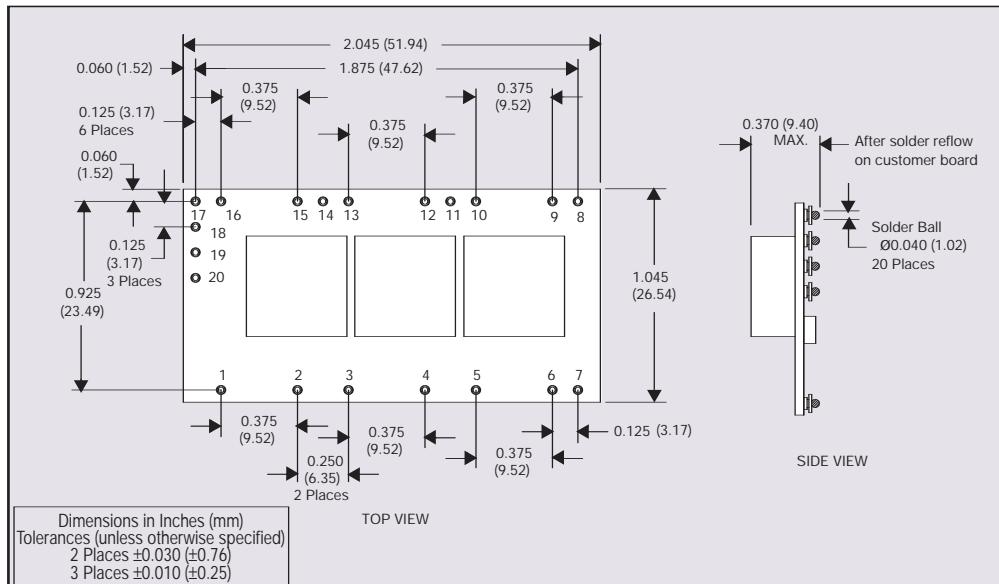


Figure 7 - Surface-Mount Mechanical Drawing

Datasheet © Artesyn Technologies® 2006

Datasheet © Artesyn Technologies® 2006  
The information and specifications contained in this datasheet are believed to be correct at time of publication. However, Artesyn Technologies accepts no responsibility for consequences arising from printing errors or inaccuracies. The information and specifications contained or described herein are subject to change in any manner at any time without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

*Please consult our website for the following items: ✓ Application Note*

[www.artesyn.com](http://www.artesyn.com)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Emerson Network Power:](#)

[PTH04040WAD](#) [PTH04040WAZ](#) [PTH04040WAZT](#)