


SPECIFICATION CONTROL DRAWING

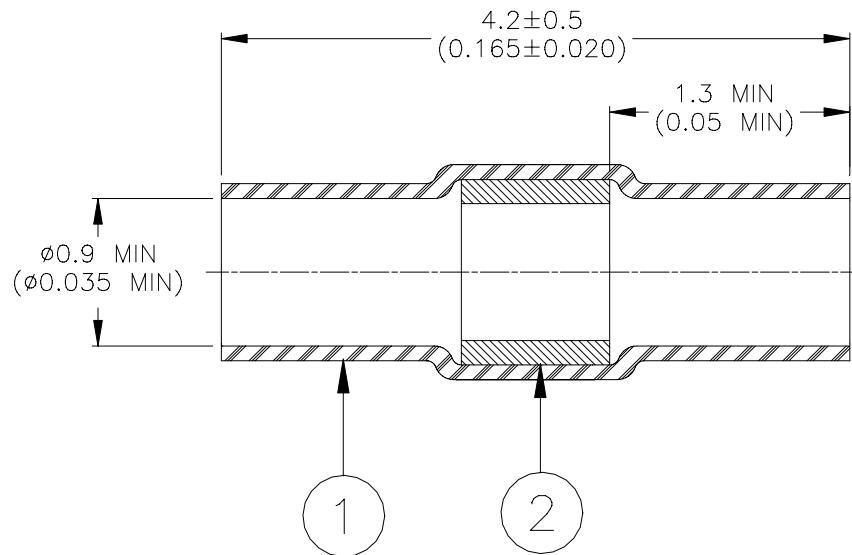

MATERIALS

1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
2. SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI J-STD-006.
 - FLUX: TYPE ROL1 per ANSI-J-STD-004.

APPLICATION

1. This part is designed to attach two leads having a combined diameter between 0.58 and 0.89 (0.023 and 0.035).
2. Part may be installed using Raychem approved heaters.

 Electronics		Tyco Electronics Corporation 300 Constitutional Drive Menlo Park, CA 94025 USA		RAYCHEM	TITLE: SOLDERSLEEVE DEVICE		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO.: D-110-0213			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A	Tyco reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.			DATE: 06-July-00	DOC ISSUE: 1	
DRAWN BY: M. FORONDA	REPLACES: N/A	DCR NUMBER: D990732	PROD. REV.: A	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.