

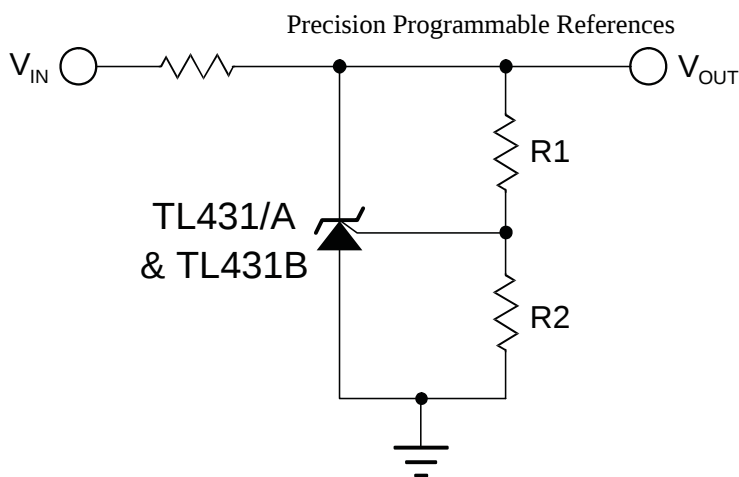
DESCRIPTION

The TL431/TL431A/TL431B series regulation. The typical output precision adjustable three terminal impedance of these devices is 200mΩ. shunt voltage regulators are pin-to-pin These devices find application in the compatible with the industry standard feedback path of switching power TL431. The output voltage of this supplies, OVP crowbar circuits, reference is programmable by using reference for A/D, D/A, and as zener two external resistors from 2.5V to diodes with improved turn-on 36V. These devices offer low output characteristics. impedance for improved load

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

KEY FEATURES

- INITIAL VOLTAGE REFERENCE ACCURACY OF 0.4% (TL431B)
- SINK CURRENT CAPABILITY 1mA to 100mA
- TYPICAL OUTPUT DYNAMIC IMPEDANCE LESS THAN 200mΩ; TYPICAL OUTPUT IMPEDANCE OF THE TL431B LESS THAN 100mΩ
- ADJUSTABLE OUTPUT VOLTAGE FROM 2.5V TO 36V
- AVAILABLE IN SURFACE-MOUNT PACKAGES
- LOW OUTPUT NOISE
- TYPICAL EQUIVALENT FULL RANGE TEMPERATURE COEFFICIENT OF 30ppm/°C
- DIRECT PIN-TO-PIN REPLACEMENT FOR INDUSTRY STANDARD TL431 AND TL1431

PRODUCT HIGHLIGHT


$$V_O = \left(1 + \frac{R_1}{R_2}\right) \cdot V_{REF}$$

PACKAGE ORDER INFO

T _A (°C)	Initial Tolerance	DM Plastic SOIC 8-Pin	LP Plastic TO-92 3-Pin	PK Plastic TO-89 3 - Pin
		RoHS Compliant / Pb-free Transition DC: 0440	RoHS Compliant / Pb-free Transition DC: 0509	RoHS Compliant / Pb-free Transition DC: 0518
0 to 70	2%	TL431CDM	TL431CLP	TL431CPK
	1%	TL431ACDM	TL431ACL	TL431ACPK
	0.4%	TL431BCDM	TL431BCLP	TL431BCPK
-40 to 85	2%	TL431IDM	TL431ILP	TL431IPK
	1%	TL431AIDM	TL431AILP	TL431AIPK
	0.4%	TL431BIDM	TL431BILP	TL461BIPK

Note: All surface mount packages are available in Tape & Reel. Append the letters "TR" to the part number. (i.e. LTL431AIDM-TR). The TO-92 (LP) package is available in ammo-pack.

ABSOLUTE MAXIMUM RATINGS

Cathode to Anode Voltage (VKA)(Note 2) -0.3 to 37V
 Reference Input Current (IREF)..... -50µA to 10mA
 Continuous Cathode Current (IK) -100mA to 150mA
 Operating Junction Temperature 150°C
 Storage Temperature Range -65°C to 150°C
 Package Peak Temp. for Solder Reflow (40 seconds maximum exposure) ... 260°C (+0 -5)

Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of specified terminal.

Note 2. Voltage values are with respect to the anode terminal unless otherwise noted.

THERMAL DATA
DM Plastic SOIC 8-Pin

THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}	165°C/W
---	---------

PK Plastic TO-89 3-Pin


THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}	71°C/W
---	--------

LP Plastic TO-92 3-Pin

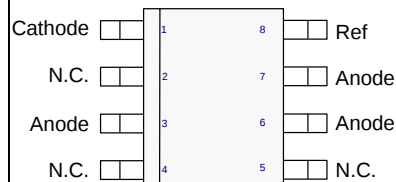
THERMAL RESISTANCE-JUNCTION TO AMBIENT, θ_{JA}	156°C/W
---	---------

Junction Temperature Calculation: $T_J = T_A + (P_D \times \theta_{JA})$.


The θ_{JA} numbers are guidelines for the thermal performance of the device/pc-board system. All of the above assume no ambient airflow.

PACKAGE PIN OUT


LP PACKAGE
(Top View)

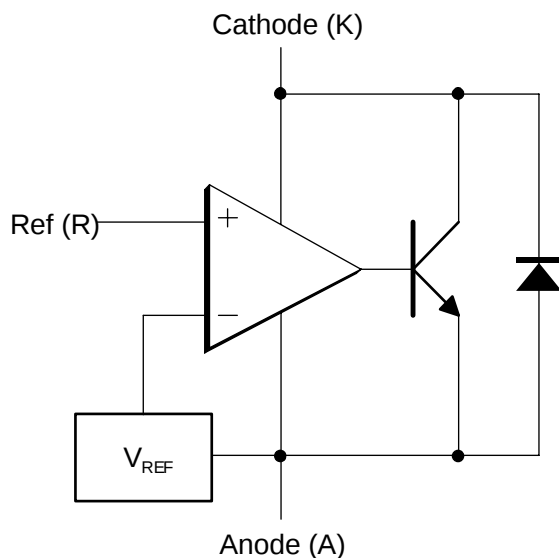


DM PACKAGE
(Top View)



PK PACKAGE
(Top View)

RoHS / Pb-free 100% Matte Tin Lead Finish

BLOCK DIAGRAM


ELECTRICAL CHARACTERISTICS

Unless otherwise specified, these specifications apply over the operating ambient temperature for the TL431C/TL431AC/TL431BC with $0^{\circ}\text{C} \leq T_A \leq 70^{\circ}\text{C}$, and TL431I/TL431AI/TL431BI with $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$

Parameter	Symbol	Test Conditions	TL431/A/B			Units
			Min	Typ	Max	
Reference Input Voltage	V_{REF}	TL431 $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}, T_A = 25^{\circ}\text{C}$	2440	2495	2550	mV
		TL431A $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}, T_A = 25^{\circ}\text{C}$	2470	2495	2520	
		TL431B $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}, T_A = 25^{\circ}\text{C}$	2490	2500	2510	
Reference Drift	ΔV_{REF}	TL431C $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		4	17	mV
		TL431I $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		5	30	
	ΔV_{KA}	TL431AC $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		4	17	
		TL431AI $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		5	30	
		TL431BC $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		4	15	
		TL431BI $I_K = 10\text{mA}, V_{KA} = V_{\text{REF}}$		5	20	
Voltage Ratio, Ref to Cathode (Note 4)		TL431, TL431A $I_K = 10\text{mA}, V_{KA} = 2.5\text{V to } 36\text{V}$		-1.4	-2.7	mV/V
		TL431B $I_K = 10\text{mA}, V_{KA} = 2.5\text{V to } 36\text{V}$		-1.1	-2.0	
Reference Input Current	I_{REF}	TL431, TL431A $V_{KA} = V_{\text{REF}}, T_A = 25^{\circ}\text{C}$		2	4	μA
		TL431B $V_{KA} = V_{\text{REF}}, T_A = 25^{\circ}\text{C}$		1.5	1.9	
Minimum Operating Current	I_{MIN}	$V_{KA} = V_{\text{REF}}$ to 36V		0.4	1	mA
Off-State Cathode Current	I_{OFF}	TL431 $V_{KA} = V_{\text{REF}}$ to 36V, $T_A = 25^{\circ}\text{C}$		0.1	1	μA
		TL431A $V_{KA} = V_{\text{REF}}$ to 36V, $T_A = 25^{\circ}\text{C}$		0.1	1	
		TL431B $V_{KA} = V_{\text{REF}}$ to 36V, $T_A = \text{Operating Range}$			2	
		TL431B $V_{KA} = 36\text{V}, V_{\text{REF}} = 0\text{V}, T_A = 25^{\circ}\text{C}$		0.18	0.5	
Dynamic Impedance	$ Z_{KA} $	TL431 $V_{KA} = V_{\text{REF}}, I_K = 1\text{mA to } 100\text{mA}, f < 1\text{kHz}, T_A = 25^{\circ}\text{C}$		0.2	0.5	Ω
		TL431B $V_{KA} = V_{\text{REF}}, I_K = 1\text{mA to } 100\text{mA}, f < 1\text{kHz}, T_A = 25^{\circ}\text{C}$		0.1	0.2	

Note 3: These parameters are guaranteed by design.

Note 4: $\frac{\Delta V_{\text{REF}}}{\Delta V_{KA}}$ Ratio of change in reference input voltage to the change in cathode voltage.

GRAPH / CURVE INDEX
Characteristic Curves
Figure #

1. Reference Input Voltage vs. Free-Air Temperature
2. Reference Input Current vs. Free-Air Temperature
3. Cathode Current vs. Cathode Voltage
4. Cathode Current vs. Cathode Voltage
5. Off-State Cathode Current vs. Free-Air Temperature
6. Ratio of Delta Reference Voltage to Delta Cathode Voltage vs. Free-Air Temperature
7. Equivalent Input Noise Voltage vs. Frequency

FIGURE INDEX
Parameter Measurement Information
Figure #

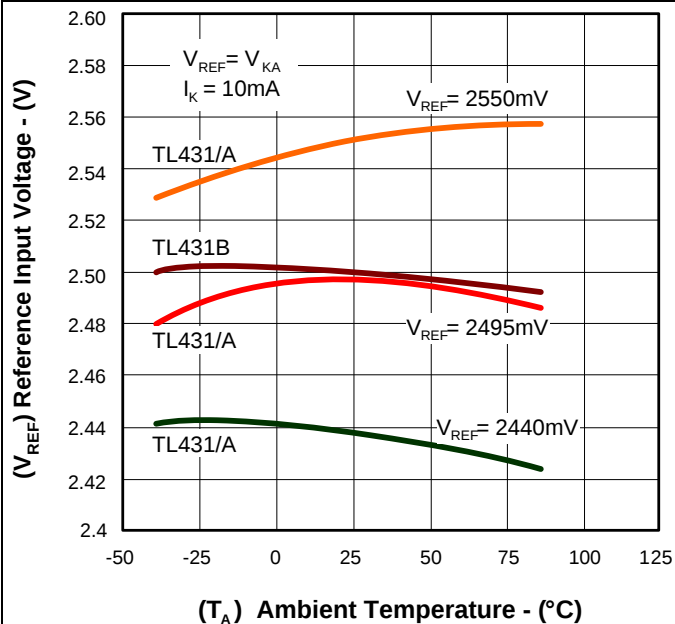
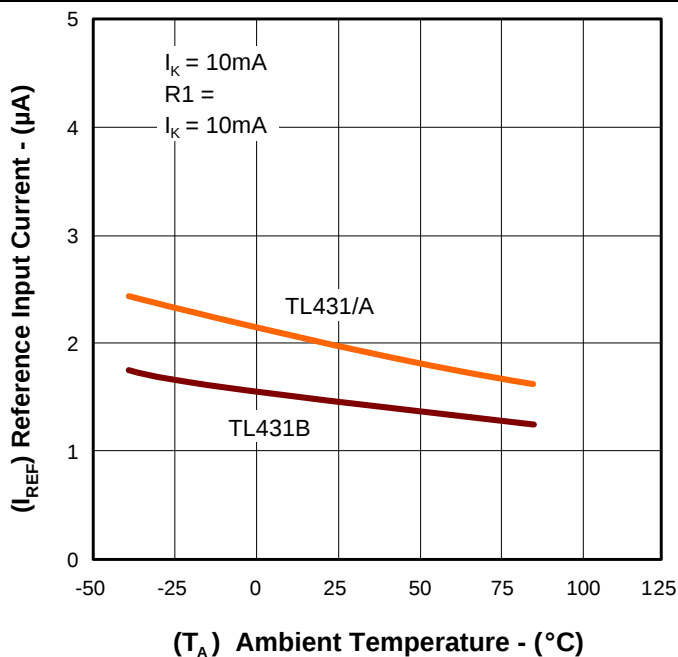
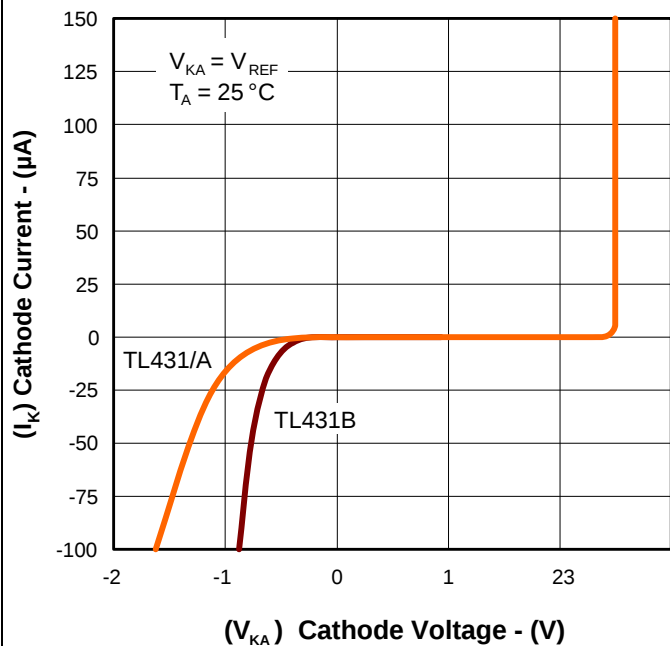
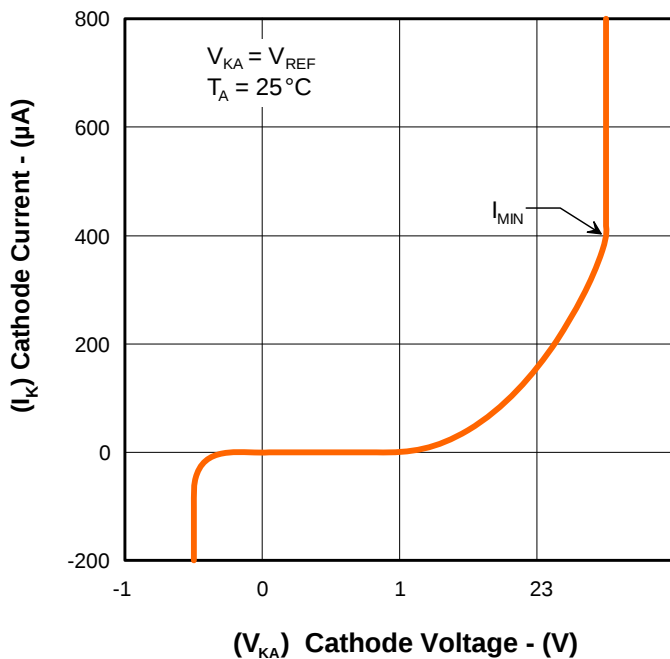
8. Test Circuit For $V_{KA} = V_{REF}$
9. Test Circuit For $V_{KA} > V_{REF}$
10. Test Circuit for I_{OFF}

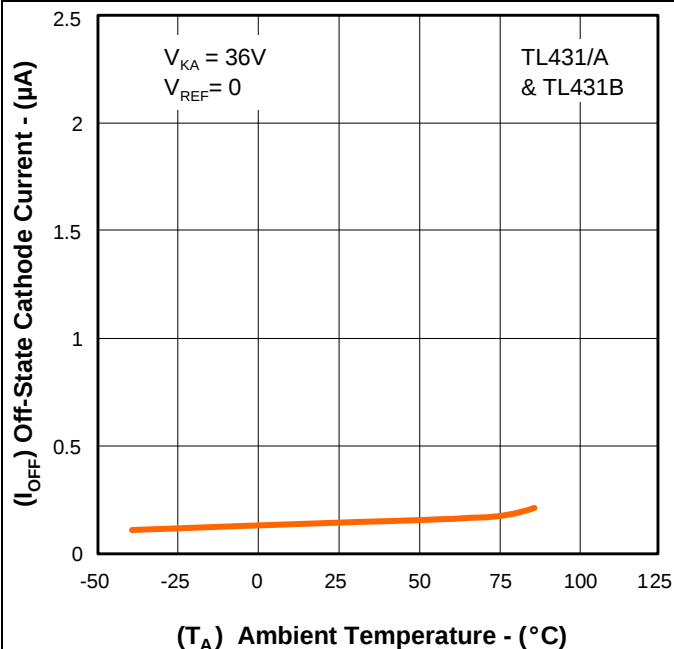
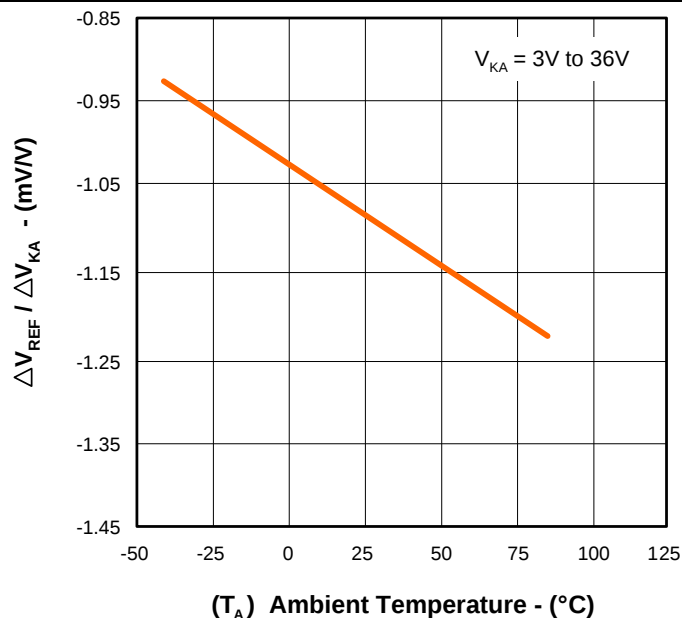
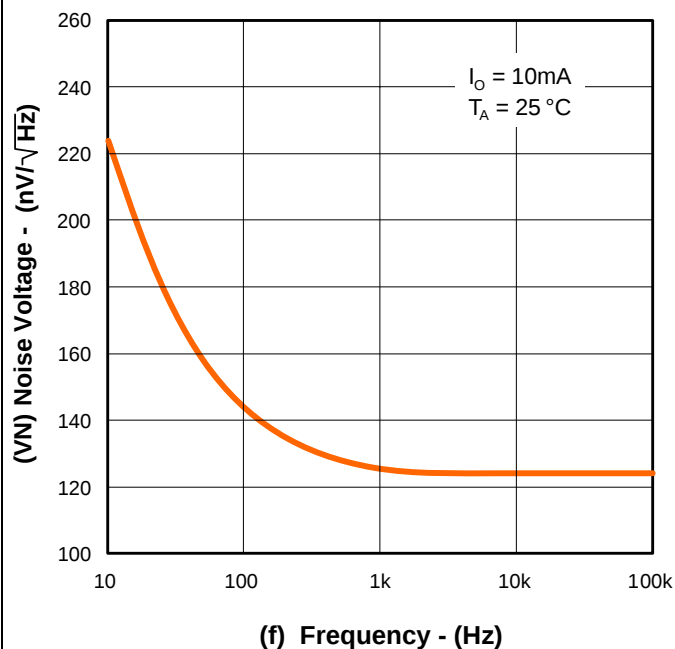
Typical Characteristics
Figure #

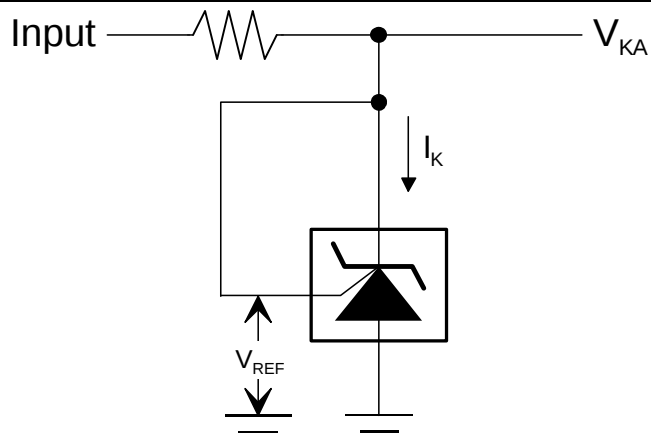
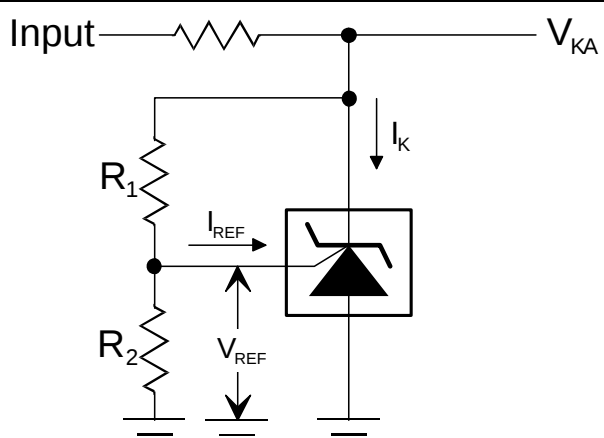
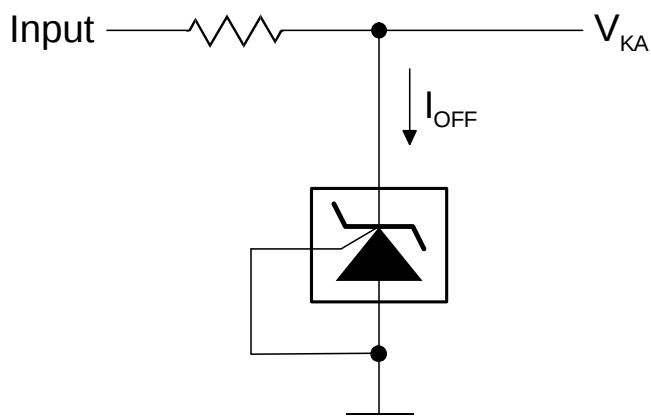
11. Equivalent Input Noise Voltage Over a 10-Second Period
12. Small-Signal Voltage Amplification vs. Frequency
13. Reference Impedance vs. Frequency
14. Pulse Response
15. Stability Boundary Conditions

Application Information
Figure #

16. Shunt Regulator
17. Single-Supply Comparator with Temperature-Compensated Threshold
18. High Current Shunt Regulator
19. Crowbar Circuit
20. Voltage Monitor
21. Precision Constant-Current Sink

CHARACTERISTIC CURVES

Figure 1 – Reference Voltage vs. Free-Air Temperature

Figure 2 – Reference Current vs. Free-Air Temperature

Figure 3 – Cathode Current vs. Cathode Voltage

Figure 4 – Cathode Current vs. Cathode Voltage

CHARACTERISTIC CURVES

Figure 5 – Off-State Cathode Current vs. Free-Air Temperature

Figure 6 – Ratio of Delta Reference Voltage to Delta Cathode Voltage vs. Free-Air Temperature

Figure 7 – Equivalent Input Noise Voltage vs. Frequency

PARAMETER MEASUREMENT INFORMATION

Figure 8 – Test Circuit for $V_{KA} = V_{REF}$

Figure 9 – Test Circuit for $V_{KA} > V_{REF}$

Figure 10 – Test Circuit for I_{OFF}

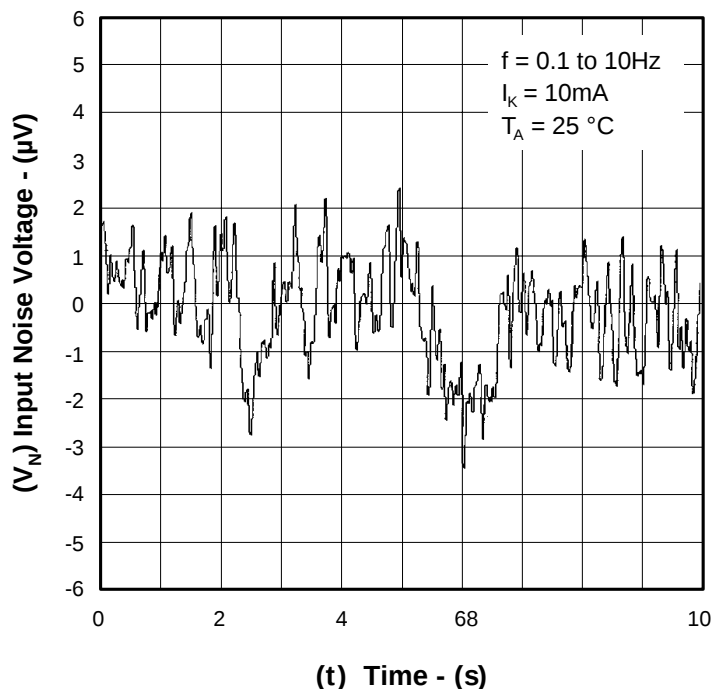
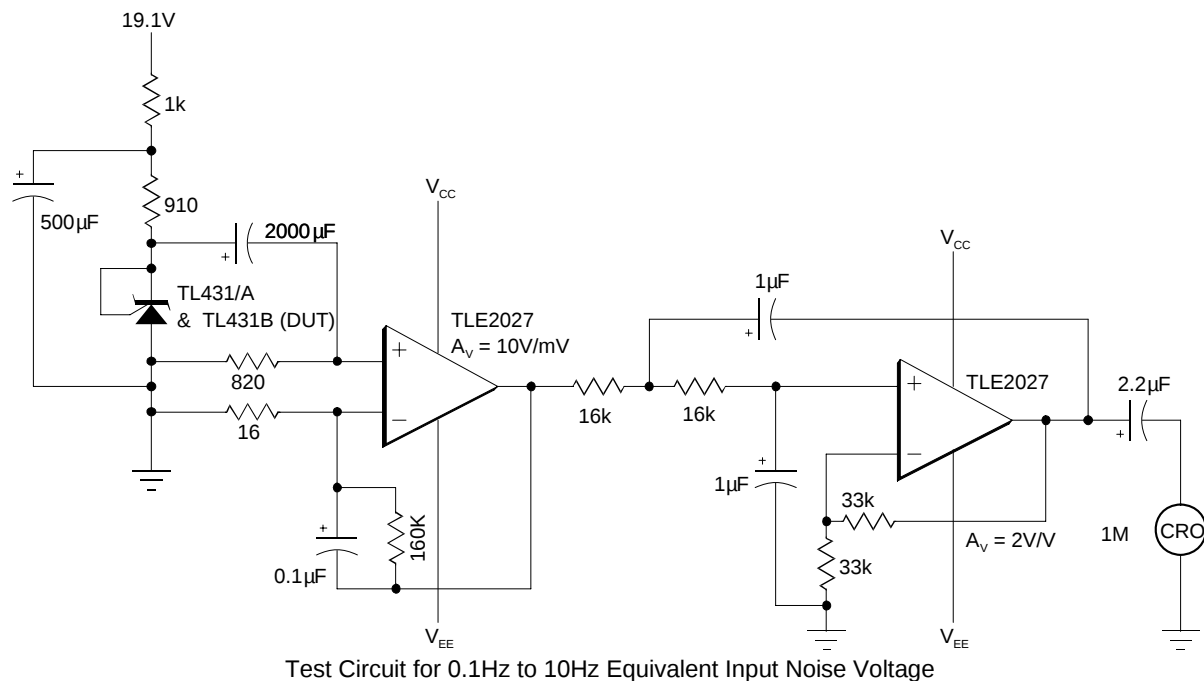
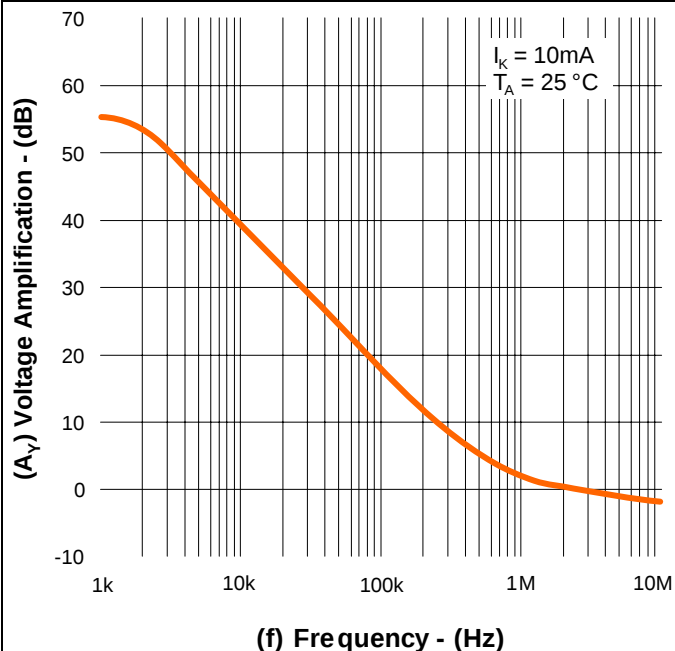
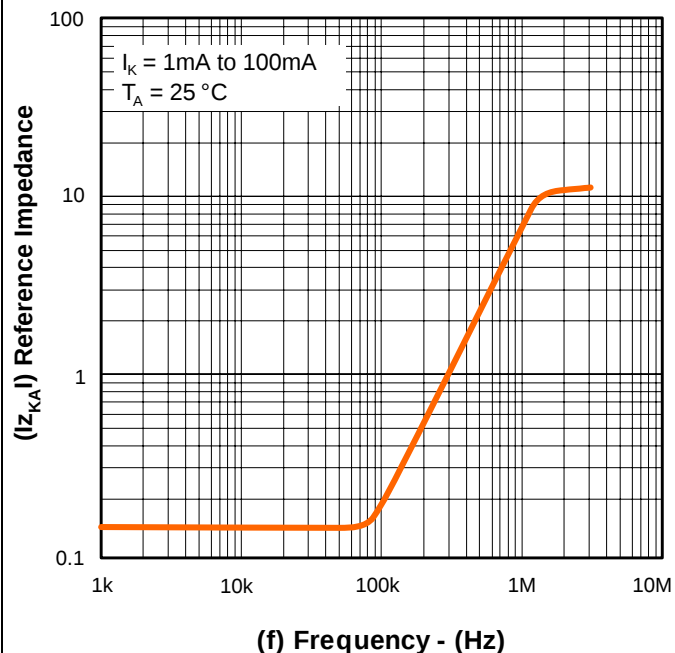
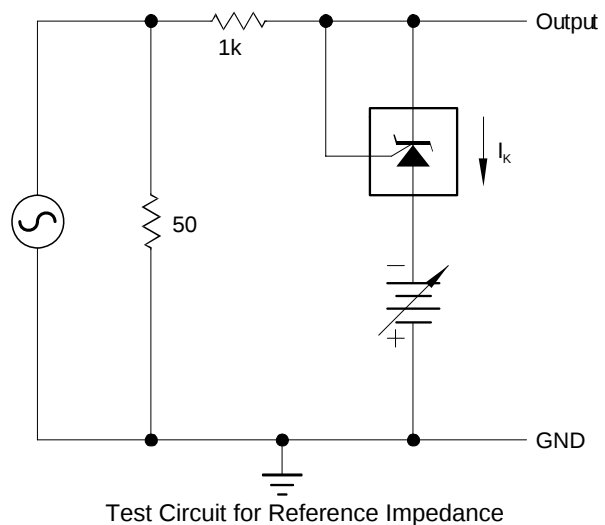
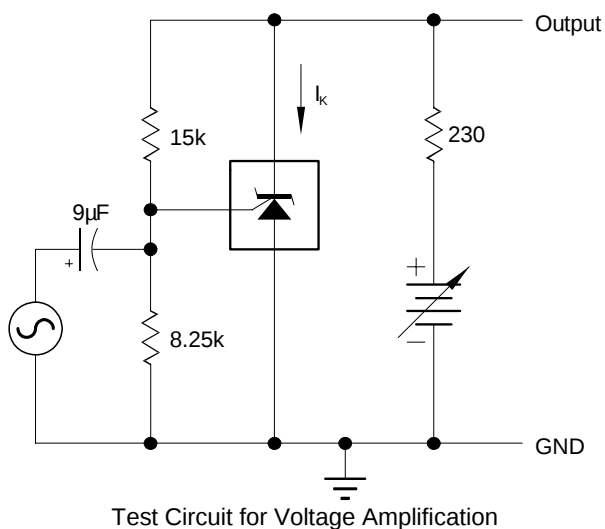
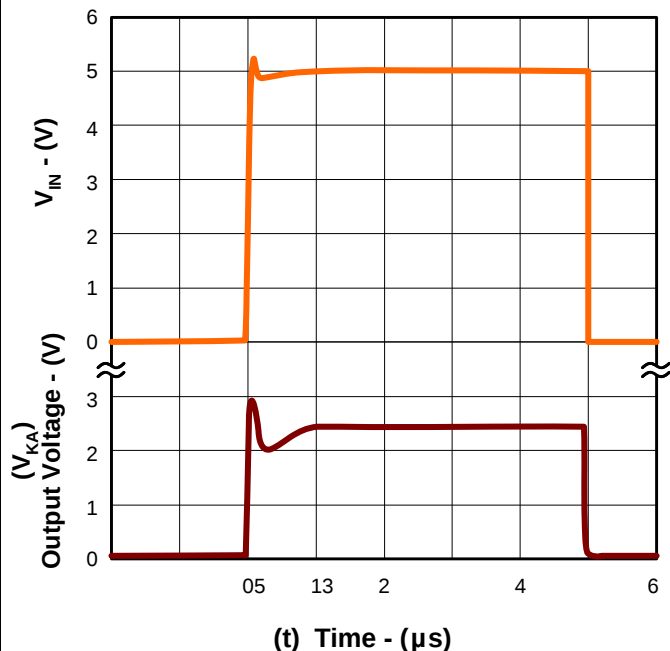
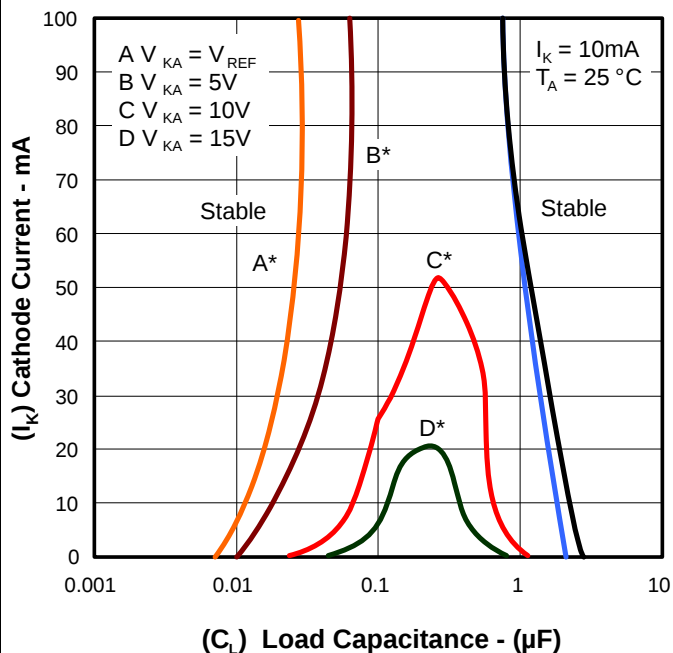
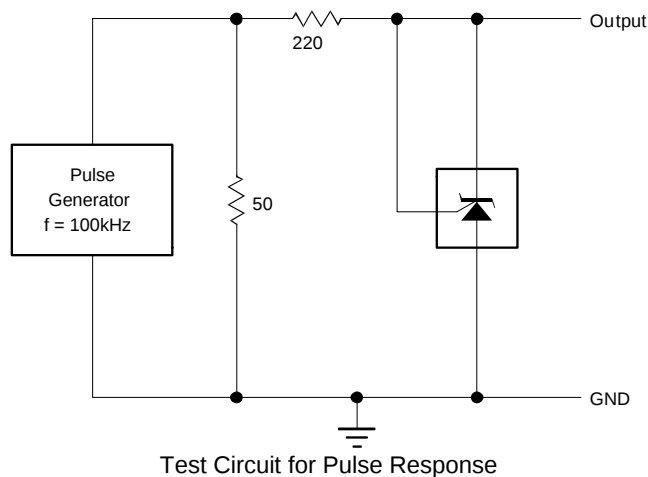
TYPICAL CHARACTERISTICS


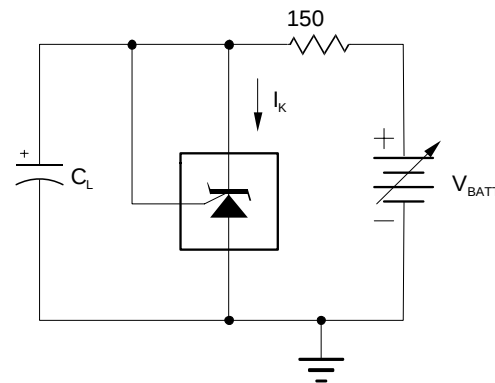
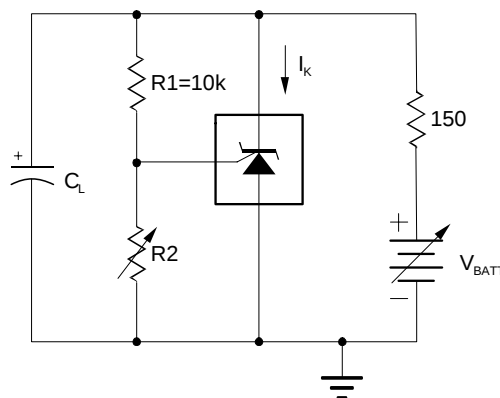
Figure 11 – Equivalent Input Noise Voltage over a 10 – Second Period

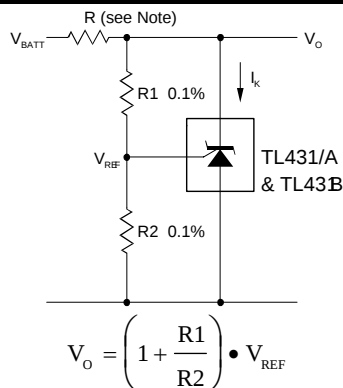


TYPICAL CHARACTERISTICS

Figure 12 – Reference Impedance vs. Frequency

Figure 13 – Reference Impedance vs. Frequency


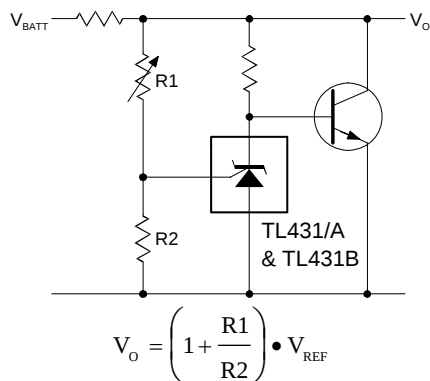
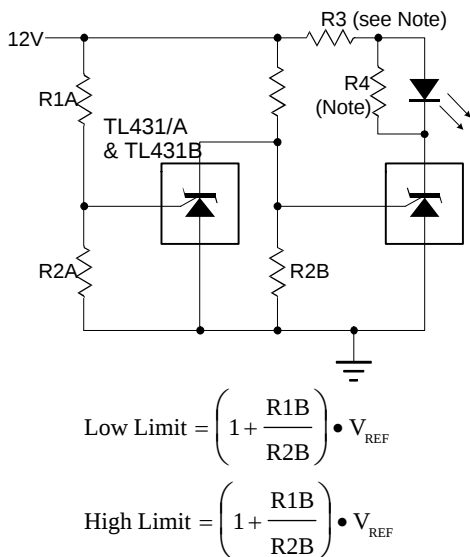
TYPICAL CHARACTERISTICS

Figure 14 – Pulse Response

Figure 15 – Stability Boundary Conditions

*The areas under the curves represent conditions that may cause the device to oscillate. For curves B, C, and D, R2 and V+ were adjusted to establish the initial V_{KA} and I_K conditions with $C_L = 0$. V_{BATT} and C_L were then adjusted to determine the ranges of stability.



APPLICATION INFORMATION

Figure 16 – Shunt Regulator

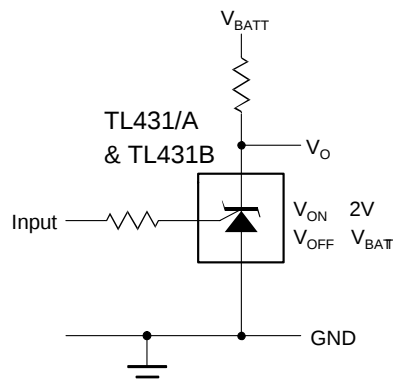
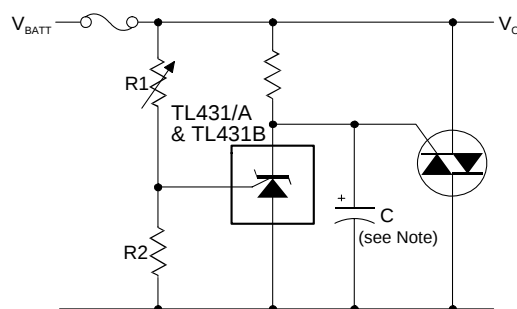
Note: R should provide > 1mA cathode current to the TL431/A & TL431B at minimum V_{BATT}


Figure 18 – High Current Shunt Regulator


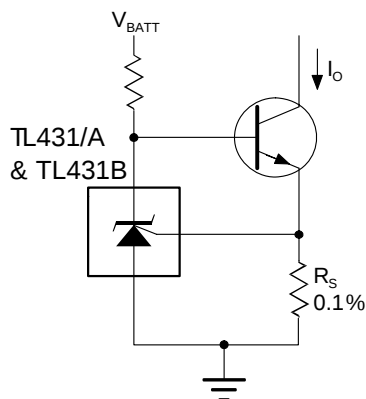
LED on when Low Limit < V_{BATT} < High Limit

Figure 20 – Voltage Monitor

Note: R3 and R4 are selected to provide the desired LED intensity and > 1mA cathode current to the TL431/A & TL431B at the available V+


Figure 17 – Single-Supply Comparator with Temperature-Compensated Threshold

Figure 19 – Crowbar Circuit

Note: Refer to the stability boundary conditions in Figure 15 to determine allowable values for C.


Figure 21 – Precision Contact – Current Sink