

# ISL12057

## Low Cost and Low Power I<sup>2</sup>C RTC Real Time Clock/Calendar with Alarm Function and Dual IRQ Pins

The [ISL12057](#) device is a low-power, real-time clock that is pin compatible and functionally equivalent to Maxim DS1337 with clock/calendar and alarm function.

The oscillator uses an external, low-cost 32.768kHz crystal with 6pF load capacitance. The real-time clock tracks time with separate registers for hours, minutes, and seconds. The device has calendar registers for date, month, year, and day of the week. The calendar is accurate through 2099, with automatic leap year correction.

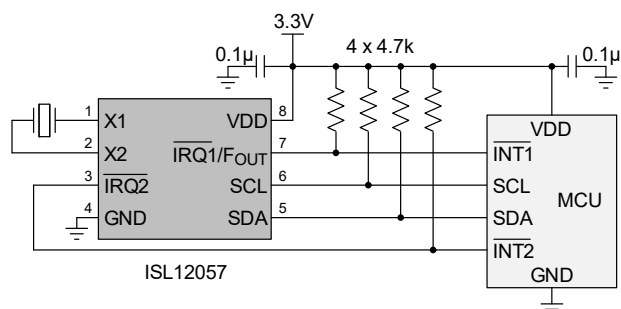


FIGURE 1. TYPICAL APPLICATION CIRCUIT

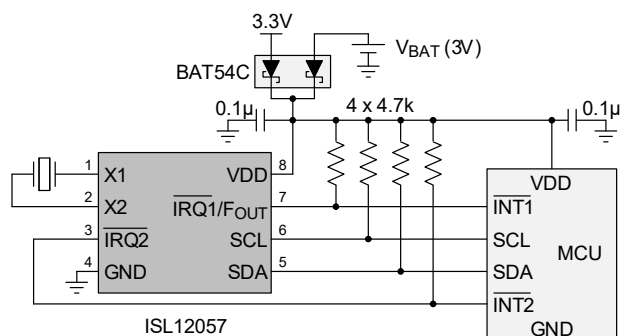


FIGURE 2. TYPICAL APPLICATION WITH BACKUP SUPPLY

### Features

- Pin Compatible to Maxim DS1337
- Functionally Equivalent to Maxim DS1337
- Real-Time Clock/Calendar
  - Tracks Time in Hours, Minutes, and Seconds
  - Day of the Week, Date, Month, and Year
- Dual Interrupts for Frequency Output and Alarm interrupts
- Four Selectable Frequency Outputs
- Two Alarms
  - Settable to the Second, Minute, Hour, Day of the Week, and Date
- I<sup>2</sup>C Interface
  - 400kHz Data Transfer Rate
- Small Package Options
  - 8 Ld MSOP
  - 8 Ld SOIC
  - Pb-Free (RoHS Compliant)

### Applications

- Utility Meters
- HVAC Equipment
- Audio/Video Components
- Set-Top Box/Television
- Modems
- Network Routers, Hubs, Switches, Bridges
- Cellular Infrastructure Equipment
- Fixed Broadband Wireless Equipment
- Pagers/PDA
- Point Of Sale Equipment
- Test Meters/Fixtures
- Office Automation (Copiers, Fax)
- Home Appliances
- Computer Products
- Other Industrial/Medical/Automotive

## Ordering Information

| PART NUMBER<br>(Notes 2, 3) | PART<br>MARKING | V <sub>DD</sub> RANGE<br>(V) | PACKAGE<br>DESCRIPTION<br>(RoHS Compliant) | PKG.<br>DWG. # | CARRIER<br>TYPE (Note 1) | TEMP. RANGE<br>(°C) |
|-----------------------------|-----------------|------------------------------|--------------------------------------------|----------------|--------------------------|---------------------|
| ISL12057IBZ                 | 12057<br>IBZ    | 1.4 to 3.6                   | 8 Ld SOIC                                  | M8.15          | Tube                     | -40 to +85          |
| ISL12057IBZ-T               |                 |                              |                                            |                | Reel, 2.5k               |                     |
| ISL12057IUZ                 | 12057           | 1.4 to 3.6                   | 8 Ld MSOP                                  | M8.118         | Tube                     |                     |
| ISL12057IUZ-T               |                 |                              |                                            |                | Reel, 2.5k               |                     |

### NOTES:

- See [TB347](#) for details about reel specifications.
- These Pb-free plastic packaged products employ special Pb-free material sets, molding compounds/die attach materials, and 100% matte tin plate plus anneal (e3 termination finish, which is RoHS compliant and compatible with both SnPb and Pb-free soldering operations). Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.
- For the Moisture Sensitivity Level (MSL), see the [ISL12057](#) device page. For more information about MSL, see [TB363](#).

## Block Diagram


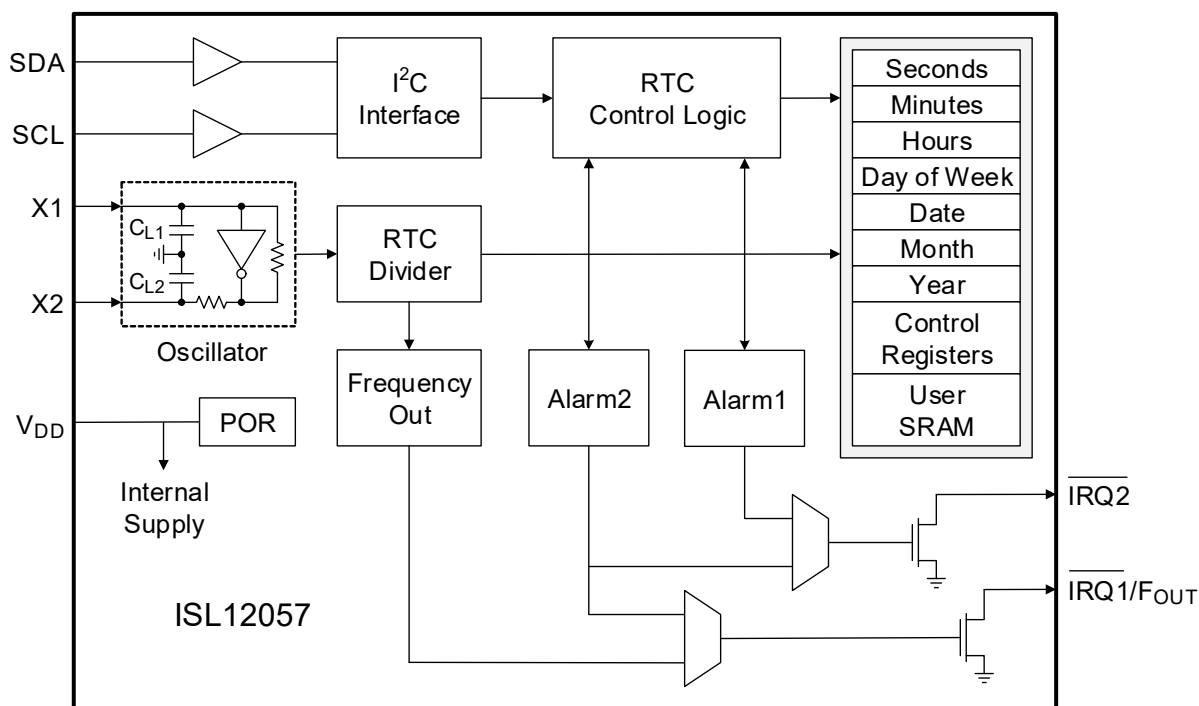


FIGURE 3. BLOCK DIAGRAM

## Pin Information

### Pin Assignments

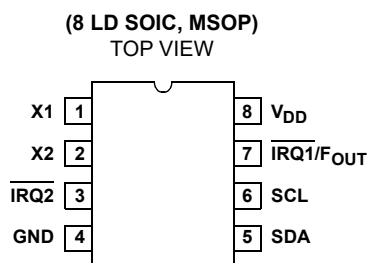

### Pin Descriptions

| PIN NUMBER | SYMBOL                | DESCRIPTION                                                                                                                                                                                                                                                                                             |
|------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1          | X1                    | The X1 pin is the input of an inverting amplifier and is intended to be connected to one pin of an external 32.768kHz quartz crystal. The required crystal load capacitance is 6pF. This pin can also be driven by an external 32.768kHz oscillator with X2 pin floating.                               |
| 2          | X2                    | The X2 pin is the output of an inverting amplifier and is intended to be connected to one pin of an external 32.768kHz quartz crystal. The required crystal load capacitance is 6pF.                                                                                                                    |
| 3          | IRQ2                  | Interrupt Output 2 is a multi-functional pin that can be used as an alarm interrupt. This pin is open drain and requires an external pull-up resistor. This pin is at high impedance at power-up.                                                                                                       |
| 4          | GND                   | Ground                                                                                                                                                                                                                                                                                                  |
| 5          | SDA                   | Serial Data (SDA) is a bidirectional pin used to transfer serial data into and out of the device. It has an open drain output and may be wire OR'ed with other open drain or open collector outputs.                                                                                                    |
| 6          | SCL                   | The Serial Clock (SCL) input is used to clock all serial data into and out of the device.                                                                                                                                                                                                               |
| 7          | IRQ1/F <sub>OUT</sub> | Interrupt Output 1/Frequency Output is a multi-functional pin that can be used as an alarm interrupt or frequency output pin. The function is set using the configuration register. This pin is open drain and requires an external pull-up resistor. It has a default output of 32.768kHz at power-up. |
| 8          | V <sub>DD</sub>       | Power supply                                                                                                                                                                                                                                                                                            |

**Absolute Maximum Ratings**

|                                                                                         |             |
|-----------------------------------------------------------------------------------------|-------------|
| Voltage on $V_{DD}$ (Respect to GND)                                                    | -0.2V to 4V |
| Voltage on $\overline{IRQ1}/F_{OUT}$ , $\overline{IRQ2}$ , SCL and SDA (Respect to GND) | -0.2V to 6V |
| Voltage on X1 and X2 Pins (Respect to GND)                                              | -0.2V to 4V |
| ESD Rating ((Per MIL-STD-883 Method 3014)                                               |             |
| Human Body Model                                                                        | >4kV        |
| Machine Model                                                                           | >350V       |

**Thermal Information**

|                                       |                           |
|---------------------------------------|---------------------------|
| Thermal Resistance (Typical) (Note 4) | $\theta_{JA}$ (°C/W)      |
| 8 Lead SOIC                           | 120                       |
| 8 Lead MSOP                           | 169                       |
| Storage Temperature                   | -65°C to +150°C           |
| Pb-Free Reflow Profile                | see <a href="#">TB493</a> |

**CAUTION:** Do not operate at or near the maximum ratings listed for extended periods of time. Exposure to such conditions may adversely impact product reliability and result in failures not covered by warranty.

**NOTES:**

4.  $\theta_{JA}$  is measured with the component mounted on a high-effective thermal conductivity test board in free air. See [TB379](#) for details.

**DC Operating Characteristics – RTC** Temperature = -40°C to +85°C, unless otherwise stated. Crystal load capacitance = 6pF.

**Boldface limits apply over the operating temperature range, -40°C to +85°C.**

| SYMBOL                                                                       | PARAMETER                                                  | CONDITIONS                       | MIN<br>(Note 7) | TYP<br>(Note 6) | MAX<br>(Note 7) | UNIT    | NOTES |
|------------------------------------------------------------------------------|------------------------------------------------------------|----------------------------------|-----------------|-----------------|-----------------|---------|-------|
| $V_{DD}$                                                                     | Full Operation Power Supply                                |                                  | <b>1.8</b>      |                 | <b>3.6</b>      | V       |       |
| $V_{DDT}$                                                                    | Timekeeping Power Supply                                   |                                  | <b>1.4</b>      |                 | <b>1.8</b>      | V       |       |
| $I_{DD1}$                                                                    | Standby Supply Current                                     | $V_{DD} = 3.6V$                  |                 | 600             | 950             | nA      | 5, 10 |
|                                                                              |                                                            | $V_{DD} = 3.3V$                  |                 | 500             |                 | nA      |       |
| $I_{DD2}$                                                                    | Timekeeping Current                                        | $V_{DD} = 1.8V$                  |                 | 400             | 650             | nA      | 5, 10 |
|                                                                              |                                                            | $V_{DD} = 1.6V$                  |                 | 350             |                 | nA      |       |
| $I_{DD3}$                                                                    | Supply Current With $I^2C$ Active at Clock Speed of 400kHz | $V_{DD} = 3.6V$                  |                 | 15              | <b>40</b>       | $\mu A$ | 5     |
| $I_{LI}$                                                                     | Input Leakage Current on SCL                               |                                  | <b>-100</b>     |                 | <b>100</b>      | nA      |       |
| $I_{LO}$                                                                     | I/O Leakage Current on SDA                                 |                                  | <b>-100</b>     |                 | <b>100</b>      | nA      |       |
| <b><math>\overline{IRQ1}/F_{OUT}</math> and <math>\overline{IRQ2}</math></b> |                                                            |                                  |                 |                 |                 |         |       |
| $V_{OL}$                                                                     | Output Low Voltage                                         | $V_{DD} = 1.8V$ , $I_{OL} = 3mA$ |                 |                 | <b>0.4</b>      | V       |       |

**Serial Interface Specifications** Over the recommended operating conditions unless otherwise specified. **Boldface limits apply over the operating temperature range, -40°C to +85°C.**

| SYMBOL                        | PARAMETER                                                  | TEST CONDITIONS                                                                   | MIN<br>(Note 7)                       | TYP<br>(Note 6)      | MAX<br>(Note 7)                       | UNIT | NOTES |
|-------------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------|---------------------------------------|----------------------|---------------------------------------|------|-------|
| <b>SERIAL INTERFACE SPECS</b> |                                                            |                                                                                   |                                       |                      |                                       |      |       |
| $V_{IL}$                      | SDA and SCL Input Buffer LOW Voltage                       |                                                                                   | <b>-0.3</b>                           |                      | <b><math>0.3 \times V_{DD}</math></b> | V    |       |
| $V_{IH}$                      | SDA and SCL Input Buffer HIGH Voltage                      |                                                                                   | <b><math>0.7 \times V_{DD}</math></b> |                      | <b>5.5</b>                            | V    |       |
| Hysteresis                    | SDA and SCL Input Buffer Hysteresis                        |                                                                                   |                                       | $0.04 \times V_{DD}$ |                                       | V    |       |
| $V_{PULLUP}$                  | Maximum Pull-up voltage on SDA during $I^2C$ communication |                                                                                   |                                       |                      | <b><math>V_{DD} + 2</math></b>        | V    | 9     |
| $V_{OL}$                      | SDA Output Buffer LOW Voltage, Sinking 3mA                 | $V_{DD} > 1.8V$ , $V_{PULLUP} = 5.0V$                                             | <b>0</b>                              |                      | <b>0.4</b>                            | V    |       |
| $C_{pin}$                     | SDA and SCL Pin Capacitance                                | $T_A = +25^\circ C$ , $f = 1MHz$ , $V_{DD} = 5V$ , $V_{IN} = 0V$ , $V_{OUT} = 0V$ |                                       |                      | <b>10</b>                             | pF   | 8     |
| $f_{SCL}$                     | SCL Frequency                                              |                                                                                   |                                       |                      | <b>400</b>                            | kHz  |       |
| $t_{IN}$                      | Pulse width Suppression Time at SDA and SCL Inputs         | Any pulse narrower than the max spec is suppressed.                               |                                       |                      | <b>50</b>                             | ns   |       |


**Serial Interface Specifications** Over the recommended operating conditions unless otherwise specified. **Boldface limits apply over the operating temperature range, -40°C to +85°C. (Continued)**

| SYMBOL       | PARAMETER                                                        | TEST CONDITIONS                                                                                                                                                                                                             | MIN<br>(Note 7)                         | TYP<br>(Note 6) | MAX<br>(Note 7) | UNIT       | NOTES |
|--------------|------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|-----------------|-----------------|------------|-------|
| $t_{AA}$     | SCL Falling Edge to SDA Output Data Valid                        | SCL falling edge crossing 30% of $V_{DD}$ , until SDA exits the 30% to 70% of $V_{DD}$ window.                                                                                                                              |                                         |                 | <b>900</b>      | ns         | 9     |
| $t_{BUF}$    | Time the Bus Must Be Free Before the Start of a New Transmission | SDA crossing 70% of $V_{DD}$ during a STOP condition, to SDA crossing 70% of $V_{DD}$ during the following START condition                                                                                                  | <b>1300</b>                             |                 |                 | ns         |       |
| $t_{LOW}$    | Clock LOW Time                                                   | Measured at the 30% of $V_{DD}$ crossing                                                                                                                                                                                    | <b>1300</b>                             |                 |                 | ns         |       |
| $t_{HIGH}$   | Clock HIGH Time                                                  | Measured at the 70% of $V_{DD}$ crossing                                                                                                                                                                                    | <b>600</b>                              |                 |                 | ns         |       |
| $t_{SU:STA}$ | START Condition Setup Time                                       | SCL rising edge to SDA falling edge. Both crossing 70% of $V_{DD}$                                                                                                                                                          | <b>600</b>                              |                 |                 | ns         |       |
| $t_{HD:STA}$ | START Condition Hold Time                                        | From SDA falling edge crossing 30% of $V_{DD}$ to SCL falling edge crossing 70% of $V_{DD}$                                                                                                                                 | <b>600</b>                              |                 |                 | ns         |       |
| $t_{SU:DAT}$ | Input Data Setup Time                                            | From SDA exiting the 30% to 70% of $V_{DD}$ window, to SCL rising edge crossing 30% of $V_{DD}$                                                                                                                             | <b>100</b>                              |                 |                 | ns         |       |
| $t_{HD:DAT}$ | Input Data Hold Time                                             | From SCL falling edge crossing 30% of $V_{DD}$ to SDA entering the 30% to 70% of $V_{DD}$ window                                                                                                                            | <b>0</b>                                |                 | <b>900</b>      | ns         |       |
| $t_{SU:STO}$ | STOP Condition Setup Time                                        | From SCL rising edge crossing 70% of $V_{DD}$ , to SDA rising edge crossing 30% of $V_{DD}$                                                                                                                                 | <b>600</b>                              |                 |                 | ns         |       |
| $t_{HD:STO}$ | STOP Condition Hold Time                                         | From SDA rising edge to SCL falling edge. Both crossing 70% of $V_{DD}$                                                                                                                                                     | <b>600</b>                              |                 |                 | ns         |       |
| $t_{DH}$     | Output Data Hold Time                                            | From SCL falling edge crossing 30% of $V_{DD}$ , until SDA enters the 30% to 70% of $V_{DD}$ window                                                                                                                         | <b>0</b>                                |                 |                 | ns         |       |
| $t_R$        | SDA and SCL Rise Time                                            | From 30% to 70% of $V_{DD}$                                                                                                                                                                                                 | <b><math>20 + 0.1 \times C_b</math></b> |                 | <b>300</b>      | ns         | 8     |
| $t_F$        | SDA and SCL Fall Time                                            | From 70% to 30% of $V_{DD}$                                                                                                                                                                                                 | <b><math>20 + 0.1 \times C_b</math></b> |                 | <b>300</b>      | ns         | 8, 9  |
| $C_b$        | Capacitive Loading of SDA or SCL                                 | Total on-chip and off-chip                                                                                                                                                                                                  | <b>10</b>                               |                 | <b>400</b>      | pF         | 8     |
| $R_{pu}$     | SDA and SCL Bus Pull-Up Resistor Off-Chip                        | Maximum is determined by $t_R$ and $t_F$<br>For $C_b = 400\text{pF}$ , max is about $2\text{k}\Omega$ to $\sim 2.5\text{k}\Omega$ .<br>For $C_b = 40\text{pF}$ , max is about $15\text{k}\Omega$ to $\sim 20\text{k}\Omega$ | <b>1</b>                                |                 |                 | k $\Omega$ | 8     |

## NOTES:

5.  $\overline{\text{IRQ1}}/\text{F}_{OUT}$  inactive.
6. Typical values are for  $T = +25^\circ\text{C}$  and 3.3V supply voltage.
7. Compliance to datasheet limits is assured by one or more methods: production test, characterization and/or design.
8. These are  $I^2C$  specific parameters and are not production tested; however, they are used to set conditions for testing devices to validate specification.
9. Parts will work with SDA pull-up voltage above the  $V_{PULLUP}$  limit but the  $t_{AA}$  and  $t_F$  in the  $I^2C$  parameters are not guaranteed.
10. Specified at  $+25^\circ\text{C}$ .

SDA vs SCL Timing

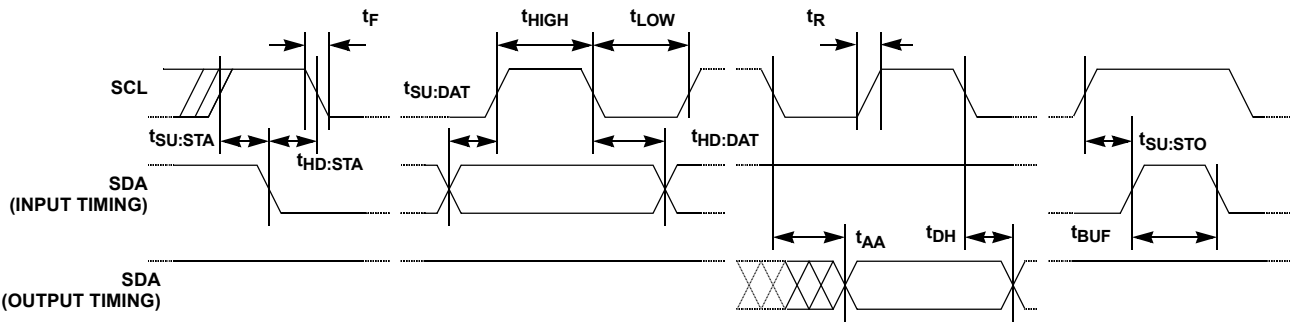

Symbol Table

| WAVEFORM | INPUTS                      | OUTPUTS                       |
|----------|-----------------------------|-------------------------------|
|          | Must be steady              | Will be steady                |
|          | May change from LOW to HIGH | Will change from LOW to HIGH  |
|          | May change from HIGH to LOW | Will change from HIGH to LOW  |
|          | Don't Care: Changes Allowed | Changing: State Not Known     |
|          | N/A                         | Center Line is High Impedance |

EQUIVALENT AC OUTPUT LOAD CIRCUIT FOR  $V_{DD} = 5V$

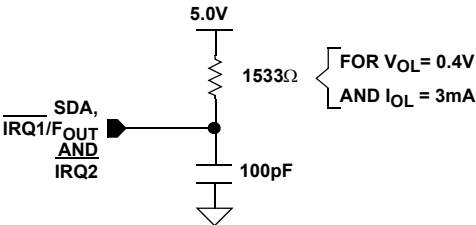


FIGURE 4. STANDARD OUTPUT LOAD FOR TESTING THE DEVICE WITH  $V_{DD} = 5.0V$

## Typical Performance Curves

Temperature is +25°C unless otherwise specified

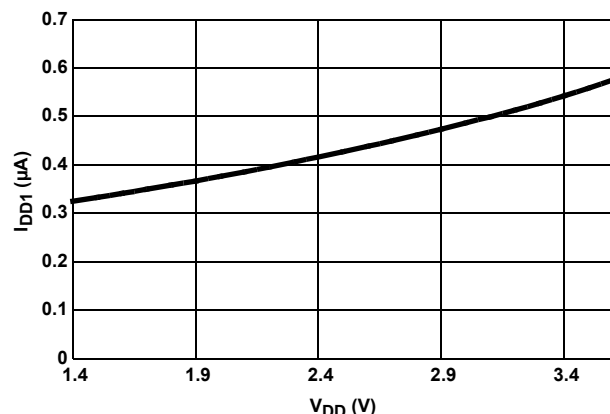


FIGURE 5.  $I_{DD1}$  vs  $V_{DD}$

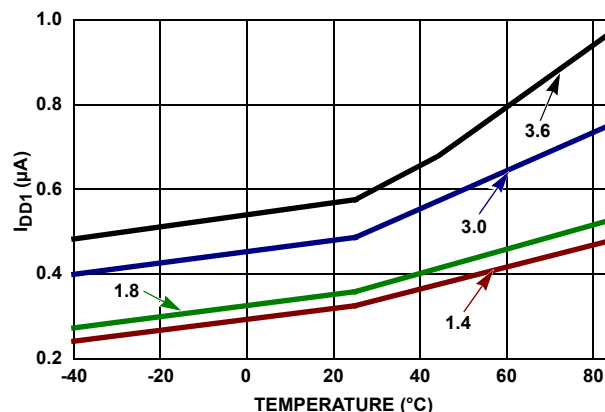


FIGURE 6.  $I_{DD1}$  vs TEMPERATURE

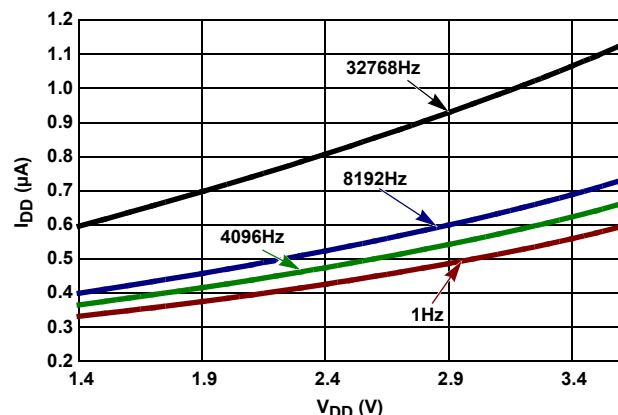


FIGURE 7.  $I_{DD}$  vs  $V_{DD}$  vs  $F_{OUT}$

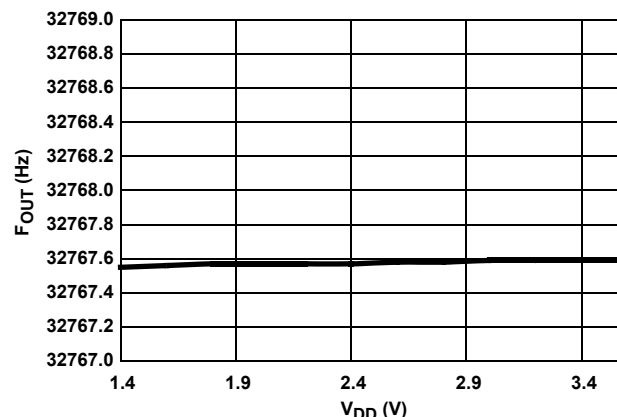


FIGURE 8.  $F_{OUT}$  vs  $V_{DD}$  WITH A TYPICAL 32.768kHz CRYSTAL

## General Description

The ISL12057 device is a low-power, real-time clock with clock/calendar, power-fail indicator, and alarm function.

The oscillator uses an external, low-cost 32.768kHz crystal with 6pF load capacitance. The real-time clock tracks time with separate registers for hours, minutes, and seconds. The device has calendar registers for date, month, year, and day of the week. The calendar is accurate through 2099, with automatic leap year correction.

The ISL12057 has two flexible alarms, and each can be set to any clock/calendar value for a match; for example, every minute, every Tuesday, or at 5:23 a.m. on the first day of every month. The alarm status is available by checking the Status Register, or the device can be configured to provide a hardware interrupt via the  $\overline{IRQ1}/F_{OUT}$  or  $\overline{IRQ2}$  pin. There is a repeat mode for the alarm, which allows a periodic interrupt every second or every minute.

## Pin Description

### X1, X2

The X1 and X2 pins are the input and output, respectively, of an inverting amplifier. An external 32.768kHz quartz crystal with 6pF load capacitance is used with the ISL12057 to supply a timebase for the real-time clock. See Figure 9.

The device can also be driven directly from a 32.768kHz square wave source with peak-to-peak voltage from 0V to  $V_{DD}$  at X1 pin with X2 pin floating.




FIGURE 9. RECOMMENDED CRYSTAL CONNECTION

**IRQ1/FO<sub>UT</sub> (Interrupt Output 1/Frequency Output)**

This dual-function pin can be used as an alarm interrupt or a frequency output pin. The  $\overline{\text{IRQ1/FO}}_{\text{UT}}$  mode is selected via the control register (address 0Eh). The  $\overline{\text{IRQ1/FO}}_{\text{UT}}$  is an open drain output.

This pin has a default output of 32.768kHz at power-up.

- **Interrupt Mode.** The pin provides an interrupt signal output. This signal notifies a host processor that an alarm has occurred and requests action.
- **Frequency Output Mode.** The pin outputs a clock signal that is related to the crystal frequency. The frequency output is user selectable and is enabled via the I<sup>2</sup>C bus.

**IRQ2 (Interrupt Output 2)**

The IRQ2 pin is used as an Alarm1 interrupt and/or an Alarm2 interrupt. The  $\overline{\text{IRQ2}}$  mode is selected via the control register (address 0Eh). The  $\overline{\text{IRQ2}}$  is an open drain output.

This pin is high impedance at power-up.

The pin provides an interrupt signal output. This signal notifies a host processor that an alarm has occurred and requests action.

**Serial Clock (SCL)**

The SCL input is used to clock all serial data into and out of the device. The input buffer on this pin is always active (not gated). The SCL pin can accept a logic high voltage up to 5.5V.

**Serial Data (SDA)**

SDA is a bi-directional pin used to transfer data into and out of the device. It has an open drain output and may be ORed with other open drain or open collector outputs. The input buffer is always active (not gated) in normal mode.

An open drain output requires the use of a pull-up resistor, and it can accept a pull-up voltage up to 5.5V. The output circuitry controls the fall time of the output signal with the use of a slope-controlled pull-down. The circuit is designed for 400kHz I<sup>2</sup>C interface speeds.

NOTE: Parts will work with SDA pull-up voltage above the  $V_{\text{PULLUP}}$  limit, but the  $t_{\text{AA}}$  and  $t_{\text{FIN}}$  in the I<sup>2</sup>C parameters are not guaranteed.

**V<sub>DD</sub>, GND**

These are chip power supply and ground pins. The device will have full operation with a power supply from 1.8V to 3.6VDC, and a timekeeping function with a power supply from 1.4V to 1.8V.

A 0.1μF decoupling capacitor is recommended on the V<sub>DD</sub> pin to ground.

**Functional Description****Real Time Clock Operation**

The Real Time Clock (RTC) uses an external 32.768kHz quartz crystal to maintain an accurate internal representation of

second, minute, hour, day of week, date, month, and year. The RTC also has leap-year correction. The RTC corrects for months having fewer than 31 days and has a bit that controls 24-hour or AM/PM format. The clock begins incrementing after power-up with valid oscillator condition.

**ACCURACY OF THE REAL TIME CLOCK**

The accuracy of the Real Time Clock depends on the frequency of the quartz crystal that is used as the time base for the RTC. Since the resonant frequency of a crystal is temperature dependent, RTC performance also depends upon temperature. The frequency deviation of the crystal is a function of the turnover temperature of the crystal from the crystal's nominal frequency. For example, a ~20ppm frequency deviation translates into an accuracy of ~1 minute per month. These parameters are available from the crystal manufacturer.

**I<sup>2</sup>C Serial Interface**

The ISL12057 has an I<sup>2</sup>C serial bus interface that provides access to the real-time clock registers, the control and status registers, and the alarm registers. The I<sup>2</sup>C serial interface is compatible with other industry I<sup>2</sup>C serial bus protocols using a bi-directional data signal (SDA) and a clock signal (SCL).

**Register Descriptions**

The registers are accessible following a slave byte of "1101000x" and they read or write to addresses [00h:0Fh]. The defined addresses and default values are described in Table 1.

**REGISTER ACCESS**

The contents of the registers can be modified by performing a byte or a page write operation directly to any register address. The address will wrap around from 0Fh to 00h.

The registers are divided into three sections:

1. Real Time Clock (7 bytes): Address 00h to 06h
2. Alarm (7 bytes): Address 07h to 0Dh
3. Control and Status (2 bytes): Address 0Eh to 0Fh

There are no addresses above 0Fh.

A register can be read by performing a random read at any address at any time. This returns the contents of that register location. Additional registers are read by performing a sequential read. For the RTC registers, the read instruction latches all clock registers into a buffer, so an update of the clock does not change the time being read. A sequential read will not result in the output of data from the memory array. At the end of a read, the master supplies a stop condition to end the operation and free the bus. After a read or write instruction, the address remains at the previous address plus one, so the user can execute a current address read and continue reading the next register.

TABLE 1. REGISTER MEMORY MAP

| ADDR | SECTION | REG NAME                    | BIT                      |                             |                             |        |        |        |        |        | REG              |         |
|------|---------|-----------------------------|--------------------------|-----------------------------|-----------------------------|--------|--------|--------|--------|--------|------------------|---------|
|      |         |                             | 7                        | 6                           | 5                           | 4      | 3      | 2      | 1      | 0      | RANGE            | DEFAULT |
| 00h  | RTC     | SC                          | 0                        | SC22                        | SC21                        | SC20   | SC13   | SC12   | SC11   | SC10   | 0-59             | 00h     |
| 01h  |         | MN                          | 0                        | MN22                        | MN21                        | MN20   | MN13   | MN12   | MN11   | MN10   | 0-59             | 00h     |
| 02h  |         | HR                          | 0                        | $\overline{\text{MIL}}$     | $\overline{\text{AM/PM}}$   | HR20   | HR13   | HR12   | HR11   | HR10   | 1-12<br>+AM/PM   | 00h     |
|      |         |                             |                          |                             | HR21                        |        |        |        |        |        | 0-23             |         |
| 03h  |         | DW                          | 0                        | 0                           | 0                           | 0      | 0      | DW12   | DW11   | DW10   | 1-7              | 01h     |
| 04h  |         | DT                          | 0                        | 0                           | DT21                        | DT20   | DT13   | DT12   | DT11   | DT10   | 1-31             | 01h     |
| 05h  |         | MO                          | CENTUR<br>Y              | 0                           | 0                           | MO20   | MO13   | MO12   | MO11   | MO10   | 0-12<br>+Century | 01h     |
| 06h  |         | YR                          | YR23                     | YR22                        | YR21                        | YR20   | YR13   | YR12   | YR11   | YR10   | 0-99             | 00h     |
| 07h  | Alarm1  | A1SC                        | A1M1                     | A1SC22                      | A1SC21                      | A1SC20 | A1SC13 | A1SC12 | A1SC11 | A1SC10 | 0-59             | 00h     |
| 08h  |         | A1MN                        | A1M2                     | A1MN22                      | A1MN21                      | A1MN20 | A1MN13 | A1MN12 | A1MN11 | A1MN10 | 0-59             | 00h     |
| 09h  |         | A1HR                        | A1M3                     | $\overline{\text{A1MIL}}$   | $\overline{\text{A1AM/PM}}$ | A1HR20 | A1HR13 | A1HR12 | A1HR11 | A1HR10 | 1-12<br>+AM/PM   | 00h     |
|      |         |                             |                          |                             | A1HR21                      |        |        |        |        |        | 0-23             |         |
| 0Ah  |         | $\overline{\text{A1DW/DT}}$ | A1M4                     | $\overline{\text{A1DW/DT}}$ | 0                           | 0      | 0      | A1DW12 | A1DW11 | A1DW10 | 1-7              | 00h     |
|      |         |                             |                          |                             | A1DT21                      | A1DT20 | A1DT13 | A1DT12 | A1DT11 | A1DT10 | 1-31             | 00h     |
| 0Bh  | Alarm2  | A2MN                        | A2M2                     | A2MN22                      | A2MN21                      | A2MN20 | A2MN13 | A2MN12 | A2MN11 | A2MN10 | 0-59             | 00h     |
| 0Ch  |         | A2HR                        | A2M3                     | $\overline{\text{A2MIL}}$   | $\overline{\text{A2AM/PM}}$ | A2HR20 | A2HR13 | A2HR12 | A2HR11 | A2HR10 | 1-12<br>+AM/PM   | 00h     |
|      |         |                             |                          |                             | A2HR21                      |        |        |        |        |        | 0-23             |         |
| 0Dh  |         | $\overline{\text{A2DW/DT}}$ | A2M4                     | $\overline{\text{A2DW/DT}}$ | 0                           | 0      | 0      | A2DW12 | A2DW11 | A2DW10 | 1-7              | 00h     |
|      |         |                             |                          |                             | A2DT21                      | A2DT20 | A2DT13 | A2DT12 | A2DT11 | A2DT10 | 1-31             | 00h     |
| 0Eh  | Control | INT                         | $\overline{\text{EOSC}}$ | 0                           | 0                           | RS2    | RS1    | INTCN  | A2IE   | A1IE   | N/A              | 18h     |
| 0Fh  | Status  | SR                          | OSF                      | 0                           | 0                           | 0      | 0      | 0      | A2F    | A1F    | N/A              | 80h     |

## Real-Time Clock Registers

### Addresses [00h to 06h]

#### RTC REGISTERS (SC, MN, HR, DW, DT, MO, YR)

These registers depict BCD representations of the time. As such, SC (Seconds, address 00h) and MN (Minutes, address 01h) range from 0 to 59, HR (Hour, address 02h) can either be a 12-hour or 24-hour mode, DW (Day of the Week, address 03h) is 1 to 7, DT (Date, address 04h) is 1 to 31, MO (Month, address 05h) is 1 to 12, and YR (Year, address 06h) is 0 to 99.

The DW register provides a Day of the Week status and uses three bits (DW2 to DW0) to represent the seven days of the week. The counter advances in the cycle, 1-2-3-4-5-6-7-1-2-...

The assignment of a numerical value to a specific day of the week is arbitrary and may be decided by the system software designer.

#### 24-HOUR TIME

If the  $\overline{\text{MIL}}$  bit of the HR register is "0", the RTC uses a 24-hour format, and bit 5 of the HR register is the second 10-hour bit (20–23 hours). If the MIL bit is "1", the RTC uses a

12-hour format and bit 5 of the HR register is the  $\overline{\text{AM/PM}}$  bit, with logic high being PM. The clock defaults to 24-hour format time.

#### CENTURY INDICATOR

The century bit (bit 7 of the MO register) is toggled when the years register overflows from 99 to 00 to indicate the change of century.

#### LEAP YEARS

Leap years add the day February 29 and are defined as those years that are divisible by 4. Years divisible by 100 are not leap years, unless they are also divisible by 400. This means that the year 2000 is a leap year, and the year 2100 is not. The ISL12057 does not correct for the leap year in the year 2100.

### Addresses [0Eh to 0Fh]

The Control and Status Registers consist of the Status Register, Interrupt, and Alarm Register.

**Interrupt Control Register (INT) [Address 0Eh]****TABLE 2. INTERRUPT CONTROL REGISTER (INT)**

| ADDR    | 7                        | 6 | 5 | 4   | 3   | 2     | 1    | 0    |
|---------|--------------------------|---|---|-----|-----|-------|------|------|
| 0Eh     | $\overline{\text{EOSC}}$ | 0 | 0 | RS2 | RS1 | INTCN | A2IE | A1IE |
| Default | 0                        | 0 | 0 | 1   | 1   | 0     | 0    | 0    |

**OSCILLATOR ENABLE BIT ( $\overline{\text{EOSC}}$ )**

The  $\overline{\text{EOSC}}$  bit enables the crystal oscillator function when it is set to "0". When the  $\overline{\text{EOSC}}$  bit is set to "1", the crystal oscillator function is disabled, and the device enters power-saving mode. The  $\overline{\text{EOSC}}$  bit is set to "0" at power-up.

**FREQUENCY OUT CONTROL BITS (RS2, RS1)**

These bits select the output frequency at the  $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$  pin. INTCN must be set to "0" for frequency output at the  $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$  pin. See Table 3 for Frequency Selection of the  $\text{F}_{\text{OUT}}$  pin.

**TABLE 3. FREQUENCY SELECTION OF  $\text{F}_{\text{OUT}}$  PIN**

| FREQUENCY<br>$\text{F}_{\text{OUT}}$ (Hz) | RS2 | RS1 | COMMENT                    |
|-------------------------------------------|-----|-----|----------------------------|
| 32768                                     | 1   | 1   | Free-running crystal clock |
| 8192                                      | 1   | 0   | Free-running crystal clock |
| 4096                                      | 0   | 1   | Free-running crystal clock |
| 1                                         | 0   | 0   | Sync at RTC write          |

**INTERRUPT CONTROL BIT (INTCN) AND ALARM INTERRUPT ENABLE BITS (A2IE, A1IE)**

The INTCN bit controls the relationship between the alarm interrupts and the  $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$  and  $\overline{\text{IRQ2}}$  pins. The A2IE and A1IE bits enable the alarm interrupts, A2F and A1F, to assert the  $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$  and  $\overline{\text{IRQ2}}$  pins. See Table 4 for Alarm Interrupt Selection with INTCN, A2IE and A1IE bits.

**TABLE 4. ALARM INTERRUPT SELECTION WITH INTCN, A2IE AND A1IE BITS**

| INTCN | A2IE | A1IE | $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$ | $\overline{\text{IRQ2}}$ |
|-------|------|------|------------------------------------------------|--------------------------|
| 0     | 0    | 0    | $\text{F}_{\text{OUT}}$                        | HIGH                     |
| 0     | 0    | 1    | $\text{F}_{\text{OUT}}$                        | A1F                      |
| 0     | 1    | 0    | $\text{F}_{\text{OUT}}$                        | A2F                      |
| 0     | 1    | 1    | $\text{F}_{\text{OUT}}$                        | A1F or A2F               |
| 1     | 0    | 0    | HIGH                                           | HIGH                     |
| 1     | 0    | 1    | HIGH                                           | A1F                      |
| 1     | 1    | 0    | A2F                                            | HIGH                     |
| 1     | 1    | 1    | A2F                                            | A1F                      |

**Status Register (SR) [Address 0Fh]**

The Status Register is located in the memory map at address 0Fh. This is a volatile register that provides status of oscillator failure and alarm interrupts.

**TABLE 5. STATUS REGISTER (SR)**

| ADDR    | 7   | 6 | 5 | 4 | 3 | 2 | 1   | 0   |
|---------|-----|---|---|---|---|---|-----|-----|
| 0Fh     | OSF | 0 | 0 | 0 | 0 | 0 | A2F | A1F |
| Default | 1   | 0 | 0 | 0 | 0 | 0 | 0   | 0   |

**ALARM1 INTERRUPT BIT (A1F)**

These bits announce if the Alarm1 matches the real-time clock. If there is a match, the respective bit is set to "1". This bit is manually reset to "0" by the user. A write to this bit in the SR can only set it to "0", not to "1".

**ALARM2 INTERRUPT BIT (A2F)**

These bits announce if the Alarm2 matches the real-time clock. If there is a match, the respective bit is set to "1". This bit is manually reset to "0" by the user. A write to this bit in the SR can only set it to "0", not to "1".

**OSCILLATOR FAILURE BIT (OSF)**

This bit is set to a "1" when there is no oscillation on the X1 pin. The bit is set by hardware (ISL12057 internally) and can only be disabled by having an oscillation on X1 and manually resetting to "0" to reset it.

**Alarm1 Registers****Addresses [Address 07h to 0Ah]**

The Alarm1 register bytes are set up identically to the RTC register bytes, except that the MSB of each byte functions as an enable bit (enable = "0"). These enable bits specify which alarm registers (seconds, minutes, etc.) are used to make the comparison. When all the enable bits are set to "1", Alarm1 triggers once per second. Note that there is no alarm byte for month and year.

The Alarm1 function works as a comparison between the Alarm1 registers and the RTC registers. As the RTC advances, Alarm1 is triggered when a match occurs between the Alarm1 registers and the RTC registers. Any one Alarm1 register, multiple registers, or all registers can be enabled for a match.

To clear Alarm1, the A1F status bit must be set to "0" with a write.

**TABLE 6. ALARM1 INTERRUPT WITH ENABLE BITS SELECTION**

| A1DW/ $\overline{\text{DT}}$ | A1M1 | A1M2 | A1M3 | A1M4 | ALARM1 INTERRUPT |
|------------------------------|------|------|------|------|------------------|
| X                            | 1    | 1    | 1    | 1    | Every Second     |
| X                            | 0    | 1    | 1    | 1    | Match Second     |
| X                            | 1    | 0    | 1    | 1    | Match Minute     |

**TABLE 6. ALARM1 INTERRUPT WITH ENABLE BITS SELECTION (Continued)**

| A1DW/DT         | A1M1 | A1M2 | A1M3 | A1M4 | ALARM1 INTERRUPT                    |
|-----------------|------|------|------|------|-------------------------------------|
| X<br>(see Note) | 1    | 1    | 0    | 1    | Match Hour                          |
| 0               | 1    | 1    | 1    | 0    | Match Date                          |
| 1               | 1    | 1    | 1    | 0    | Match Day                           |
| 0               | 0    | 0    | 1    | 1    | Match Second and Minute             |
| 0               | 0    | 1    | 0    | 1    | Match Second and Hour               |
| 0               | 0    | 0    | 0    | 0    | Match Second, Minute and Hour       |
| .               | .    | .    | .    | .    | .                                   |
| 0               | 1    | 0    | 0    | 0    | Match Minute Hour and Date          |
| 0               | 0    | 0    | 0    | 0    | Match Second, Minute Hour and Date  |
| .               | .    | .    | .    | .    | .                                   |
| 1               | 1    | 0    | 0    | 0    | Match Minute, Hour, and Day         |
| 1               | 0    | 0    | 0    | 0    | Match Second, Minute, Hour, and Day |

NOTE: "X" is "Don't care"; it can be set to 0 or 1.

Following is example of an Alarm1 Interrupt: a single alarm will occur on Monday at 11:30 a.m. (Monday is when DW = 2). Set the Alarm1 registers as follows:

| ALARM1 REGISTER | BIT |   |   |   |   |   |   |   | HEX | DESCRIPTION                |
|-----------------|-----|---|---|---|---|---|---|---|-----|----------------------------|
|                 | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |     |                            |
| A1SC            | 1   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 80h | Seconds disabled           |
| A1MN            | 0   | 0 | 1 | 1 | 0 | 0 | 0 | 0 | 30h | Minutes set to 30, enabled |
| A1HR            | 0   | 1 | 0 | 1 | 0 | 0 | 0 | 1 | 51h | Hours set to 11am, enabled |
| A1DW/DT         | 0   | 1 | 0 | 0 | 0 | 0 | 1 | 0 | 42h | Day set to 1, enabled      |

After these registers are set, an alarm is generated when the RTC advances to exactly 11:30 a.m. on January 1 (after seconds changes from 59 to 00) by setting the A1F bit in the status register to "1".

## Alarm2 Registers

### Addresses [Address 12h to 14h]

The Alarm2 register bytes are set up identically to the RTC register bytes except that the MSB of each byte functions as an enable bit (enable = "0"). These enable bits specify which alarm registers (minutes, hour, and date/day) are used to make the comparison. When all the enable bits are set to "1", Alarm2

will trigger once per minute. Note that there are no alarm bytes for seconds, month, and year.

The Alarm2 function works as a comparison between the Alarm2 registers and the RTC registers. As the RTC advances, Alarm2 is triggered when a match occurs between the Alarm2 registers and the RTC registers. Any one Alarm2 register, multiple registers, or all registers can be enabled for a match.

To clear Alarm2, the A2F status bit must be set to "0" with a write.

**TABLE 7. ALARM2 INTERRUPT WITH ENABLE BITS SELECTION**

| A2DW/DT         | A2M2 | A2M3 | A2M4 | ALARM2 INTERRUPT             |
|-----------------|------|------|------|------------------------------|
| X<br>(see Note) | 1    | 1    | 1    | Every Minute (Second=00)     |
| X               | 0    | 1    | 1    | Match Minute                 |
| X               | 1    | 0    | 1    | Match Hour                   |
| 0               | 1    | 1    | 0    | Match Date                   |
| 1               | 1    | 1    | 0    | Match Day                    |
| X               | 0    | 0    | 1    | Match Minute and Hour        |
| 0               | 1    | 0    | 0    | Match Hour and Date          |
| 0               | 0    | 1    | 0    | Match Minute and Date        |
| 0               | 0    | 0    | 0    | Match Minute, Hour, and Date |
| 1               | 0    | 1    | 0    | Match Minute and Day         |
| 1               | 1    | 0    | 0    | Match Hour and Day           |
| 1               | 0    | 0    | 0    | Match Minute, Hour, and Day  |

NOTE: "X" is "Don't care"; it can be set to 0 or 1.

Following is example of Alarm2 Interrupt: a single alarm will occur on the first day of every month at 20:00 military time. Set the Alarm2 registers as follows:

| ALARM2 REGISTER | BIT |   |   |   |   |   |   |   | HEX | DESCRIPTION              |
|-----------------|-----|---|---|---|---|---|---|---|-----|--------------------------|
|                 | 7   | 6 | 5 | 4 | 3 | 2 | 1 | 0 |     |                          |
| A2MN            | 1   | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 80h | Minutes disabled         |
| A2HR            | 0   | 0 | 1 | 0 | 0 | 0 | 0 | 0 | 20h | Hours set to 20, enabled |
| A2DW/DT         | 0   | 0 | 0 | 0 | 0 | 0 | 0 | 1 | 01h | Date set to 1st, enabled |

After these registers are set, an alarm is generated when the RTC advances to exactly 20:00 on Monday (after minutes changes from 59 to 00) by setting the A2F bit in the status register to "1".

## I<sup>2</sup>C Serial Interface

The ISL12057 supports a bi-directional, bus-oriented protocol. The protocol defines any device that sends data onto the bus as a transmitter and the receiving device as the receiver. The

device controlling the transfer is the master, and the device being controlled is the slave. The master device always initiates data transfers and provides the clock for both transmit and receive operations. Therefore, the ISL12057 operates as a slave device in all applications.

All communication over the I<sup>2</sup>C interface is conducted by sending the MSB of each byte of data first.

### Protocol Conventions

Data states on the SDA line can change only during SCL LOW periods. SDA state changes during SCL HIGH are reserved for indicating START and STOP conditions (see Figure 10). On power-up of the ISL12057, the SDA pin is in the input mode.

All I<sup>2</sup>C interface operations must begin with a START condition, which is a HIGH to LOW transition of SDA while SCL is HIGH. The ISL12057 continuously monitors the SDA and SCL lines for the START condition and does not respond to any command until this condition is met (see Figure 10). A START condition is ignored during the power-up sequence.

All I<sup>2</sup>C interface operations must be terminated by a STOP condition, which is a LOW to HIGH transition of SDA while SCL

is HIGH (see Figure 10). A STOP condition at the end of a read operation or at the end of a write operation to memory only places the device in its standby mode.

An acknowledge (ACK) is a software convention used to indicate a successful data transfer. The transmitting device, either master or slave, releases the SDA bus after transmitting 8 bits. During the ninth clock cycle, the receiver pulls the SDA line LOW to acknowledge reception of the 8 bits of data (see Figure 11).

The ISL12057 responds with an ACK after recognition of a START condition followed by a valid Identification Byte, and once again after successful receipt of an Address Byte. The ISL12057 also responds with an ACK after receiving a Data Byte of a write operation. The master must respond with an ACK after receiving a Data Byte of a read operation.

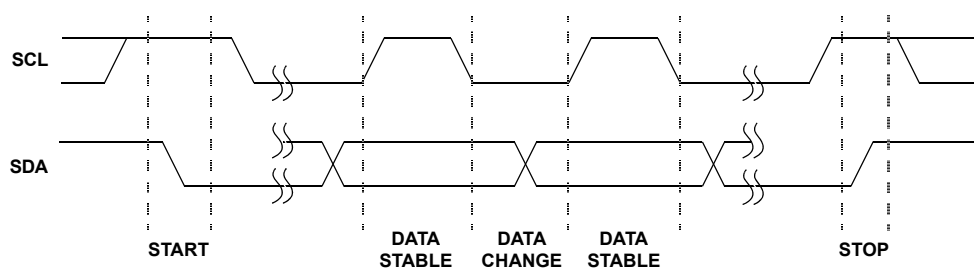


FIGURE 10. VALID DATA CHANGES, START, AND STOP CONDITIONS

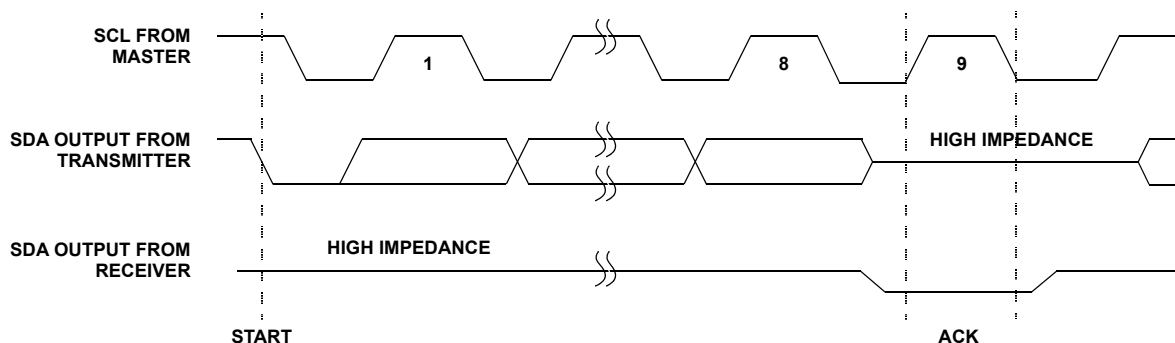


FIGURE 11. ACKNOWLEDGE RESPONSE FROM RECEIVER

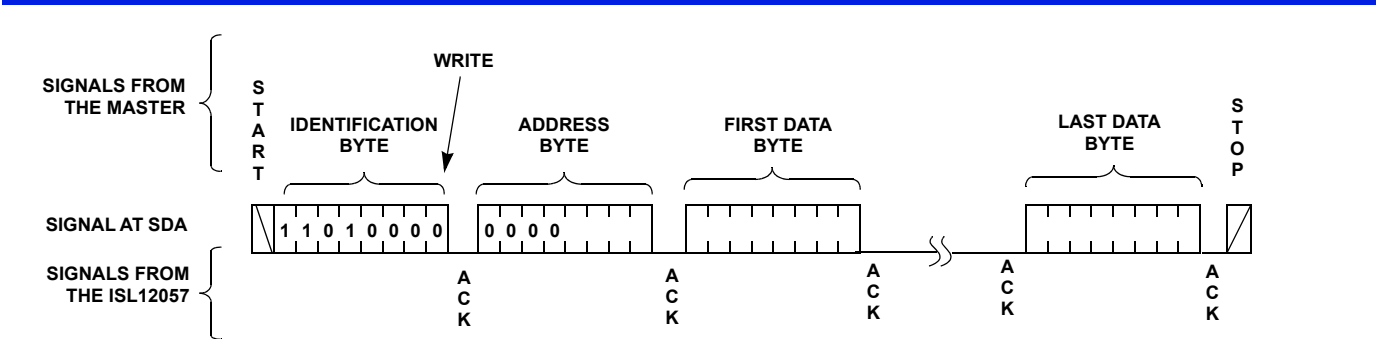


FIGURE 12. SEQUENTIAL BYTE WRITE SEQUENCE

Device Addressing

Following a start condition, the master must output a Slave Address Byte. The seven MSBs are the device identifier. These bits are “1101000”. Slave bits “1101” access the register. Slave bits “000” specify the device select bits.

The last bit of the Slave Address Byte defines a read or write operation to be performed. When this R/W bit is a “1”, then a read operation is selected. A “0” selects a write operation (see Figure 13).

After loading the entire Slave Address Byte from the SDA bus, the ISL12057 compares the device identifier and device select bits with “1101000”. Upon a correct compare, the device outputs an acknowledge on the SDA line.

Following the Slave Byte is a one-byte word address. The word address is either supplied by the master device or obtained from an internal counter. On power-up, the internal address counter is set to address 0h, so a current address read of the RTC array starts at address 0h. When required, as part of a random read, the master must supply the 1 Word Address Bytes as shown in Figure 14.

In a random read operation, the slave byte in the “dummy write” portion must match the slave byte in the “read” section. For a random read of the Clock/Control Registers, the slave byte must be “1101000x” in both places.

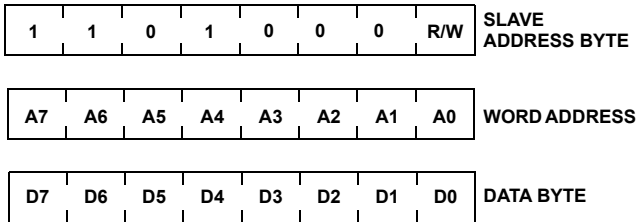


FIGURE 13. SLAVE ADDRESS, WORD ADDRESS, AND DATA BYTES

Write Operation

A Write operation requires a START condition, followed by a valid Identification Byte, a valid Address Byte, a Data Byte, and a STOP condition. After each of the three bytes, the ISL12057 responds with an ACK. At this point, the I<sup>2</sup>C interface enters a standby state.

Read Operation

A Read operation consists of a 3- byte instruction followed by one or more Data Bytes (see Figure 14). The master device initiates the operation by issuing the following sequence: a START, the Identification byte with the R/W bit set to “0”, an Address Byte, a second START, and a second Identification byte with the R/W bit set to “1”. After each of the three bytes, the ISL12057 responds with an ACK. Then, the ISL12057 transmits Data Bytes, as long as the master device responds with an ACK during the SCL cycle following the eighth bit of each byte. The master device terminates the read operation (issuing a STOP condition) following the last bit of the last Data Byte (see Figure 14).

The Data Bytes are from the memory location indicated by an internal pointer. This pointer’s initial value is determined by the Address Byte in the Read operation instruction. It increments by one during transmission of each Data Byte. After reaching the memory location 13h, the pointer “rolls over” to 00h, and the device continues to output data for each ACK received.

## Application Section

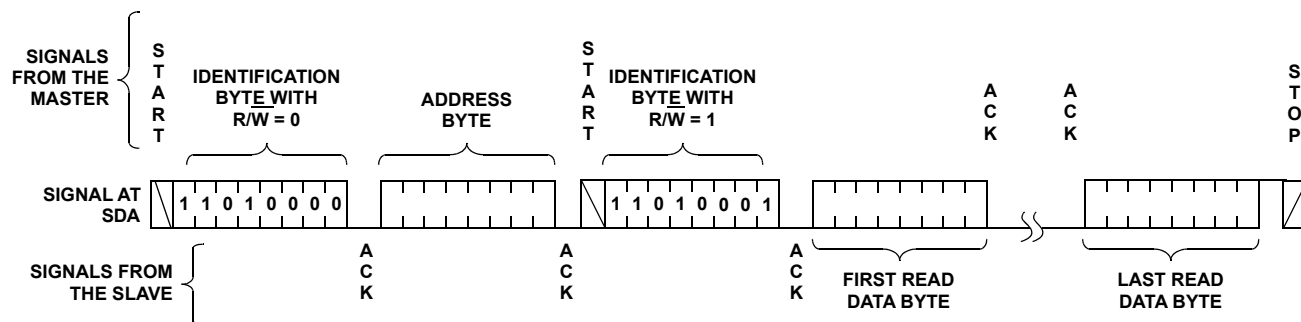


FIGURE 14. READ SEQUENCE

### Oscillator Crystal Requirements

The ISL12057 uses a standard 32.768kHz crystal. Table 8 lists some recommended surface-mount crystals with the following common parameters:

- Resonance frequency: 32.768kHz
- Operating temperature range: -40°C to +85°C
- Load capacitance: 6pF
- Effective Series resistance: <50kΩ

TABLE 8. SUGGESTED SURFACE MOUNT CRYSTALS

| MFR.    | PART NUMBER           | TOLERANCE |
|---------|-----------------------|-----------|
| Abracon | ABS25-32.768KHZ-6-T   | ±20ppm    |
| Abracon | ABS25-32.768KHZ-6-1-T | ±10ppm    |
| Fox     | FKFSREIBM0.032768-T3  | ±20ppm    |
| EPSON   | MC-306 32.7680K-E3    | ±20ppm    |

### Layout Considerations

The crystal input at X1 has a very high impedance, and oscillator circuits operating at low frequencies (such as 32.768kHz) are known to pick up noise very easily if layout precautions are not followed. Most instances of erratic clocking or large accuracy errors can be traced to the susceptibility of the oscillator circuit to interference from adjacent high-speed clock or data lines. Careful layout of the RTC circuit will avoid noise pickup and ensure accurate clocking.

Figure 15 shows a suggested layout for the ISL12057 device using a surface-mount crystal. Two main precautions should be followed:

1. Do not run the serial bus lines or any high-speed logic lines in the vicinity of the crystal. These logic level lines can induce noise in the oscillator circuit to cause misclocking.

2. Add a ground trace around the crystal with one end terminated at the chip ground. This will provide termination for emitted noise in the vicinity of the RTC device.

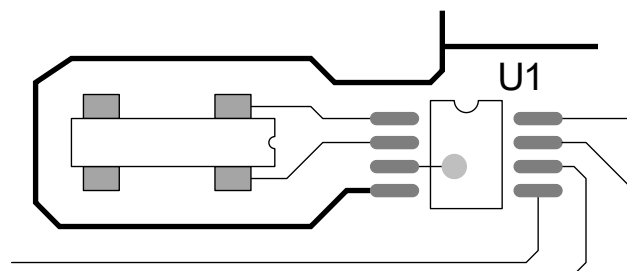


FIGURE 15. SUGGESTED LAYOUT FOR ISL12057 AND CRYSTAL

In addition, it is a good idea to avoid a ground plane under the X1 and X2 pins and the crystal, as this will affect the load capacitance and therefore the oscillator accuracy of the circuit. If the  $\overline{\text{IRQ1}}/\text{F}_{\text{OUT}}$  pin is used as a clock, it should be routed away from the RTC device as well. The trace for the  $V_{\text{CC}}$  pins can be treated as a ground, and it should be routed around the crystal.

## Revision History

The revision history provided is for informational purposes only and is believed to be accurate, but not warranted. Please go to the web to make sure that you have the latest revision.

| DATE         | REVISION | CHANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|--------------|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Oct 2, 2023  | 2.02     | Updated M8.15 POD to the latest revision (corrected typo).                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Jun 15, 2023 | 2.01     | <p>Added Typical Application Diagrams to page 1.</p> <p>Moved the Pinout diagram before the Pin descriptions section.</p> <p>Updated the Block Diagram.</p> <p>Updated Ordering Information table and notes.</p> <p>Removed UTDFN information from the document.</p> <p>Updated the Oscillator Crystal Requirements section.</p> <p>Updated Figure 15.</p> <p>Removed About Intersil section.</p> <p>Updated POD M8.118 to the latest revision; changes are as follows:</p> <p>-Corrected typo in the side view 1, updating package thickness tolerance from <math>\pm 0.10</math> to <math>\pm 0.10</math>.</p> <p>Updated POD M8.15 to the latest revision; changes are as follows:</p> <p>-Added the coplanarity spec into the drawing.</p> |
| Sep 25, 2015 | 2.00     | <p>Updated Ordering Information Table on page 2.</p> <p>Added Revision History and About Intersil sections.</p> <p>Updated POD M8.118 from rev 3 to rev 4. Changes since rev 4:</p> <p>Corrected lead width dimension in side view 1 from "0.25 - 0.036" to "0.25 - 0.36"</p> <p>Updated POD M8.15 from rev 2 to rev 4. Changes since rev 2:</p> <p>Changed in Typical Recommended Land Pattern the following:</p> <p>2.41(0.095) to 2.20(0.087)</p> <p>0.76 (0.030) to 0.60(0.023)</p> <p>0.200 to 5.20(0.205)</p> <p>Changed Note 1 "1982" to "1994"</p>                                                                                                                                                                                     |






## Package Outline Drawings

For the most recent package outline drawing, see [M8.118](#).

M8.118

8 Lead Mini Small Outline Plastic Package

Rev 5, 5/2021

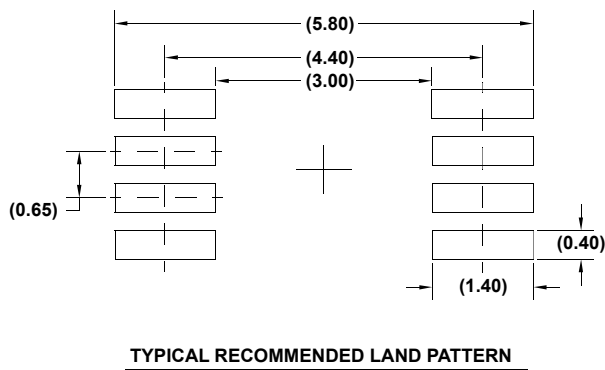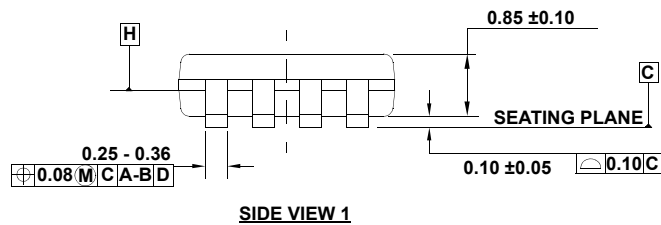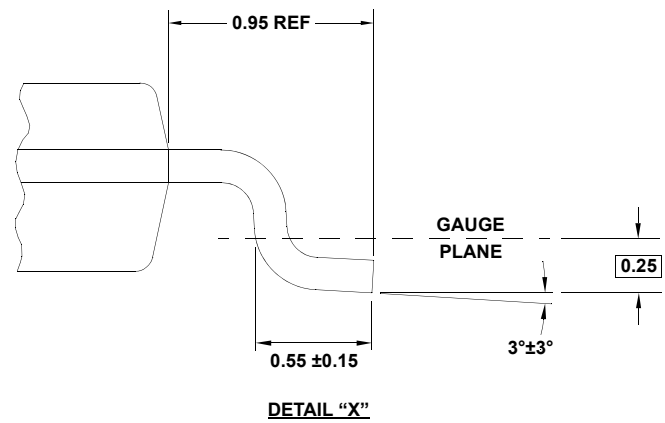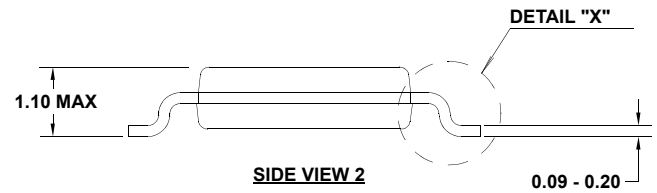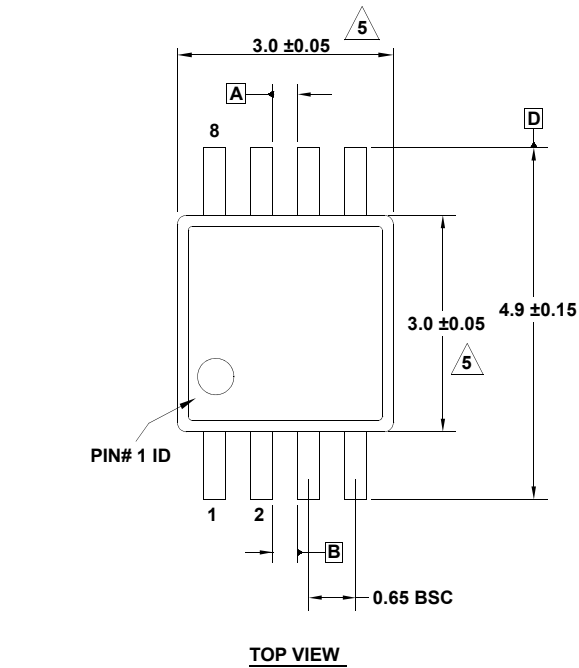

### NOTES:


1. Dimensions are in millimeters.
2. Dimensioning and tolerancing conform to JEDEC MO-187-AA and AMSEY14.5m-1994.
3. Plastic or metal protrusions of 0.15mm max per side are not included.
4. Plastic interlead protrusions of 0.15mm max per side are not included.
5. Dimensions are measured at Datum Plane "H".
6. Dimensions in ( ) are for reference only.

For the most recent package outline drawing, see [M8.15](#).

M8.15

8 Lead Narrow Body Small Outline Plastic Package

Rev 7, 9/2023

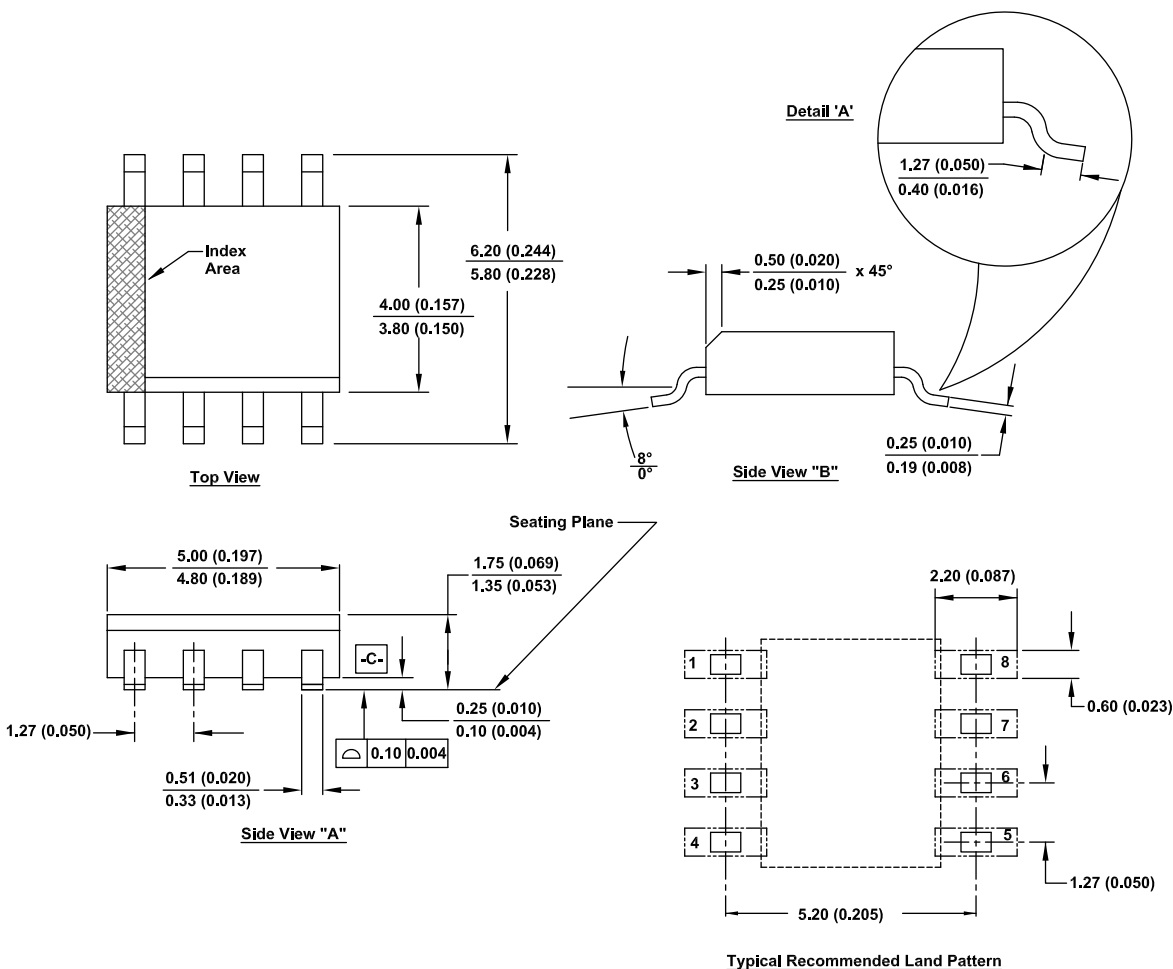

Notes:

1. Dimensioning and tolerancing conform to ASME Y14.5M-1994.
2. Package length does not include mold flash, protrusion or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
3. Package width does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
4. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
5. Terminal numbers are shown for reference only.
6. The lead width as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch).
7. Controlling dimension: MILLIMETER. Converted inch dimension are not necessarily exact.
8. This outline conforms to JEDEC publication MS-012-AA ISSUE C.

## IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES ("RENESAS") PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Disclaimer Rev.1.0 Mar 2020)

### Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,  
Koto-ku, Tokyo 135-0061, Japan  
[www.renesas.com](http://www.renesas.com)

### Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:  
[www.renesas.com/contact/](http://www.renesas.com/contact/)

### Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.