


SF1093A 175 MHz SAW Filter



- Designed for GSM BTS Transmitter Applications
- Low Insertion Loss
- Excellent Size-to-Performance Ratio
- Hermetic 13.3 x 6.5 mm Surface-Mount Case
- Unbalanced Input and Output



Characteristic	Sym	Min	Typ	Max	Units	Notes
Nominal Center Frequency	fc		175.000		MHz	1
Passband	Insertion Loss at fc	IL	8	9.0	dB	1, 2
	2 dB Passband	BW ₂	±330	±460	kHz	
	Amplitude Ripple (peak to adjacent valley)			0.5	dB _{P-P}	
	Amplitude Variation over fc ±200 kHz			1.0		
	Group Delay Variation over fc ±300 kHz	GDV	<200	260	ns _{P-P}	
	Absolute Group Delay	GD	1.3	1.5	µs	1, 2, 3
Rejection	fc -0.9 to fc -0.6 and fc +0.6 to fc +0.9 MHz		5		dB	
	fc -1.2 to fc -0.9 and fc +0.9 to fc +1.2 MHz		17			
	fc -6.0 to fc -1.2 and fc +1.2 to fc +6.0 MHz		30			
	fc -155 to fc -6.0 and fc +6.0 to fc +125 MHz		50			
Operating Temperature Range	T _A	-5		+70	°C	1

Impedance Matching to 50 Ω unbalanced	External L-C
Case Style	SM13365-12 13.3 x 6.5 mm Nominal Footprint
Lid Symbolization (YY = Year, WW = week)	RFM SF1093A YYWW

Absolute Maximum Ratings

Rating	Value	Units
Maximum Incident Power in Passband	+10	dBm
Max. DC voltage between any 2 terminals	30	VDC
Storage Temperature Range	-40 to +85	°C
Max Soldering Profile	265°C for 10 s	

Electrical Connections

Connection	Terminals
Port 1 Hot	2
Port 1 Gnd Return	3
Port 2 Hot	8
Port 2 Gnd Return	9
Case Ground	All others

Notes:

1. Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.
2. Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.
3. Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details.
4. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."
5. The design, manufacturing process, and specifications of this filter are subject to change.
6. Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.
7. US and international patents may apply.
8. RFM, stylized RFM logo, and RF Monolithics, Inc. are registered trademarks of RF Monolithics, Inc.
9. ©Copyright 1999, RF Monolithics Inc.
10. Electrostatic Sensitive Device. Observe precautions for handling.




RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

SF1093A 175 MHz SAW Filter

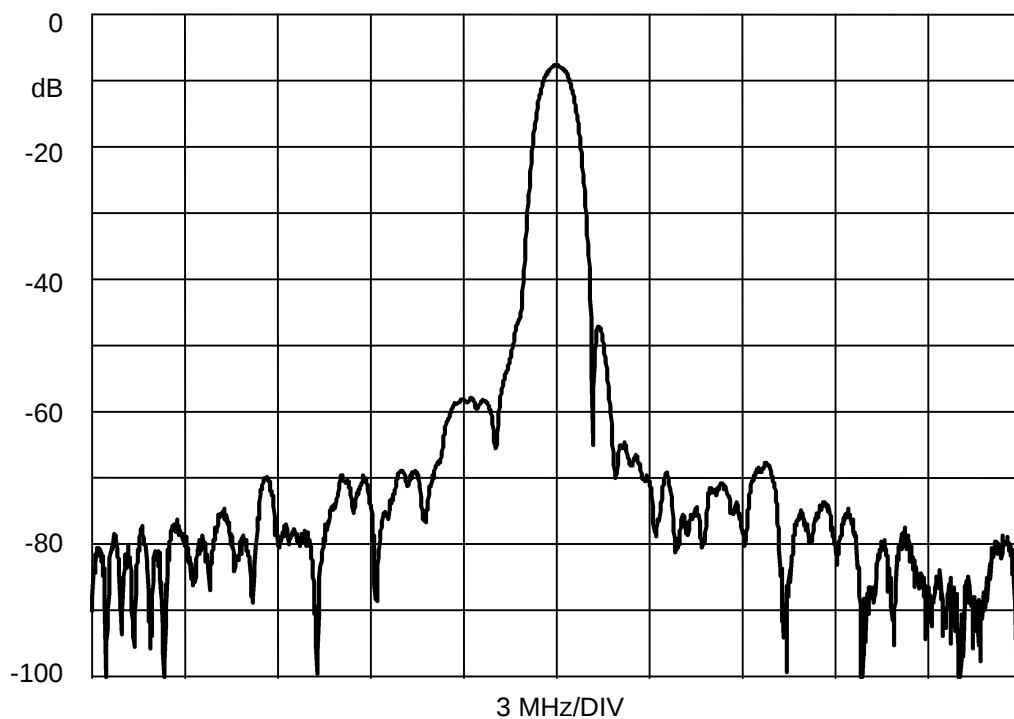


RF Monolithics, Inc.
4347 Sigma Road
Dallas, Texas 75244
USA

Phone: +1(972)233-2903
Fax: +1(972)387-8148
e-mail: info@rfm.com
Home page: www.rfm.com

European Sales Office
44 1963 251383
44 1963 251510

12-Terminal Ceramic Surface-Mount Case 13.3 x 6.5 mm Nominal Footprint





Case Dimensions

Dimension	mm			Inches		
	Min	Nom	Max	Min	Nom	Max
A	13.08	13.31	13.60	0.515	0.524	0.535
B	6.27	6.50	6.80	0.247	0.256	0.268
C		1.91	2.00		0.075	0.079
D		1.50			0.059	
E		0.79			0.031	
H		1.0			0.039	
P		2.54			0.100	

Electrical Connections


Connection		Terminals
Port 1	Input or Return	2
	Return or Input	3
Port 2	Output or Return	8
	Return or Output	9
Ground		All others
Single Ended Operation		Return is ground
Differential Operation		Return is hot

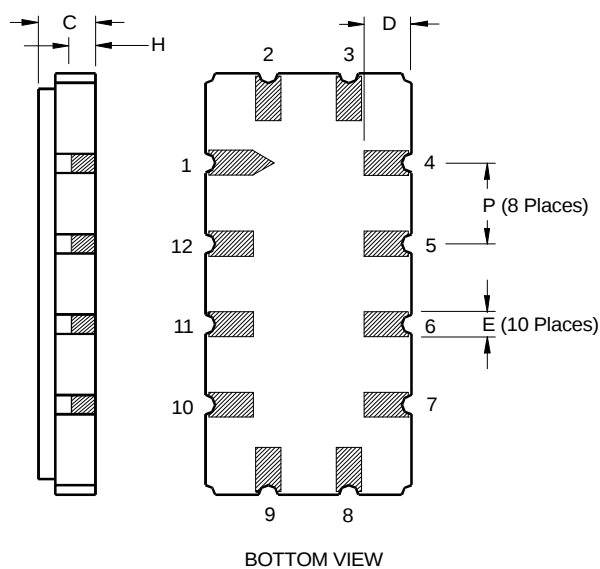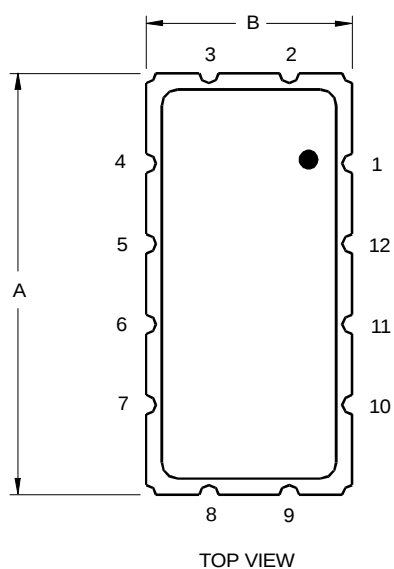

NOTES:

- 1. ORIENTATION OF COMPONENTS MAY VARY FROM ASSEMBLY DIAGRAM IN ORDER TO FINE TUNE DEVICE.
- 2. ACTUAL COMPONENTS USED MAY VARY FOR EACH DEVICE.


REV	ECN NO.	DESCRIPTION	DATE
A	6797	INITIAL RELEASE	29jun98
B	10225	REVISED PIN NUMBERING	04oct01

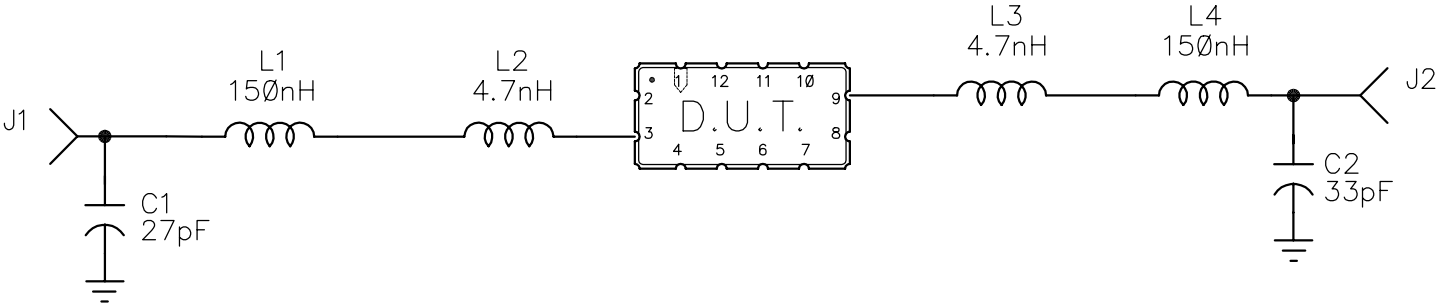


DRAWN BY/DATE: J.J. LAYTON 06/29/98		TITLE: ASSY DIAGRAM, DEMO BOARD, SF1093A					
RF Monolithics, Inc. DALLAS, TEXAS 75244	CHECKED/APPROVED	SIZE	CODE IDENT	DWG. NO.	SF1093A-000	REV	SHEET
		A	2U874			B	1/4

3. LABEL FIXTURE WITH ELECTRONIC METHOD AS SHOWN.

4. SOLDER J1 & J2 TO PCB1 AS SHOWN.

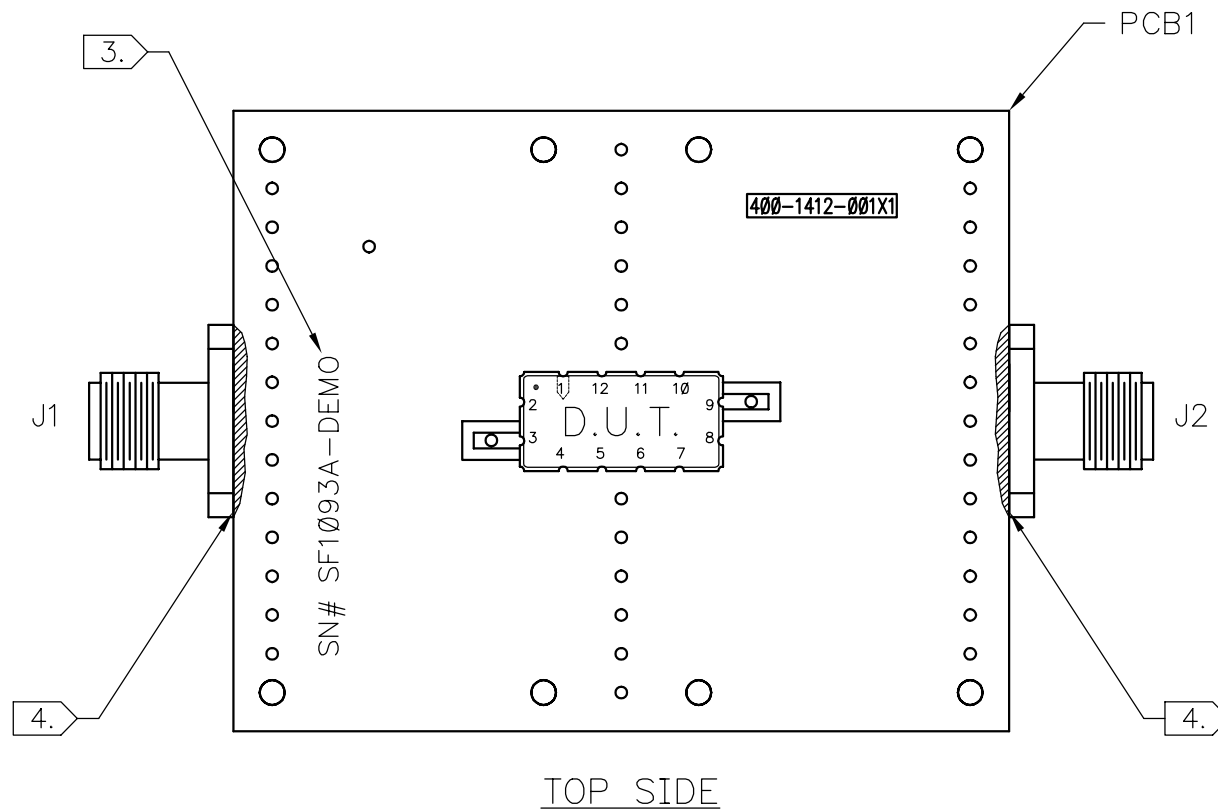

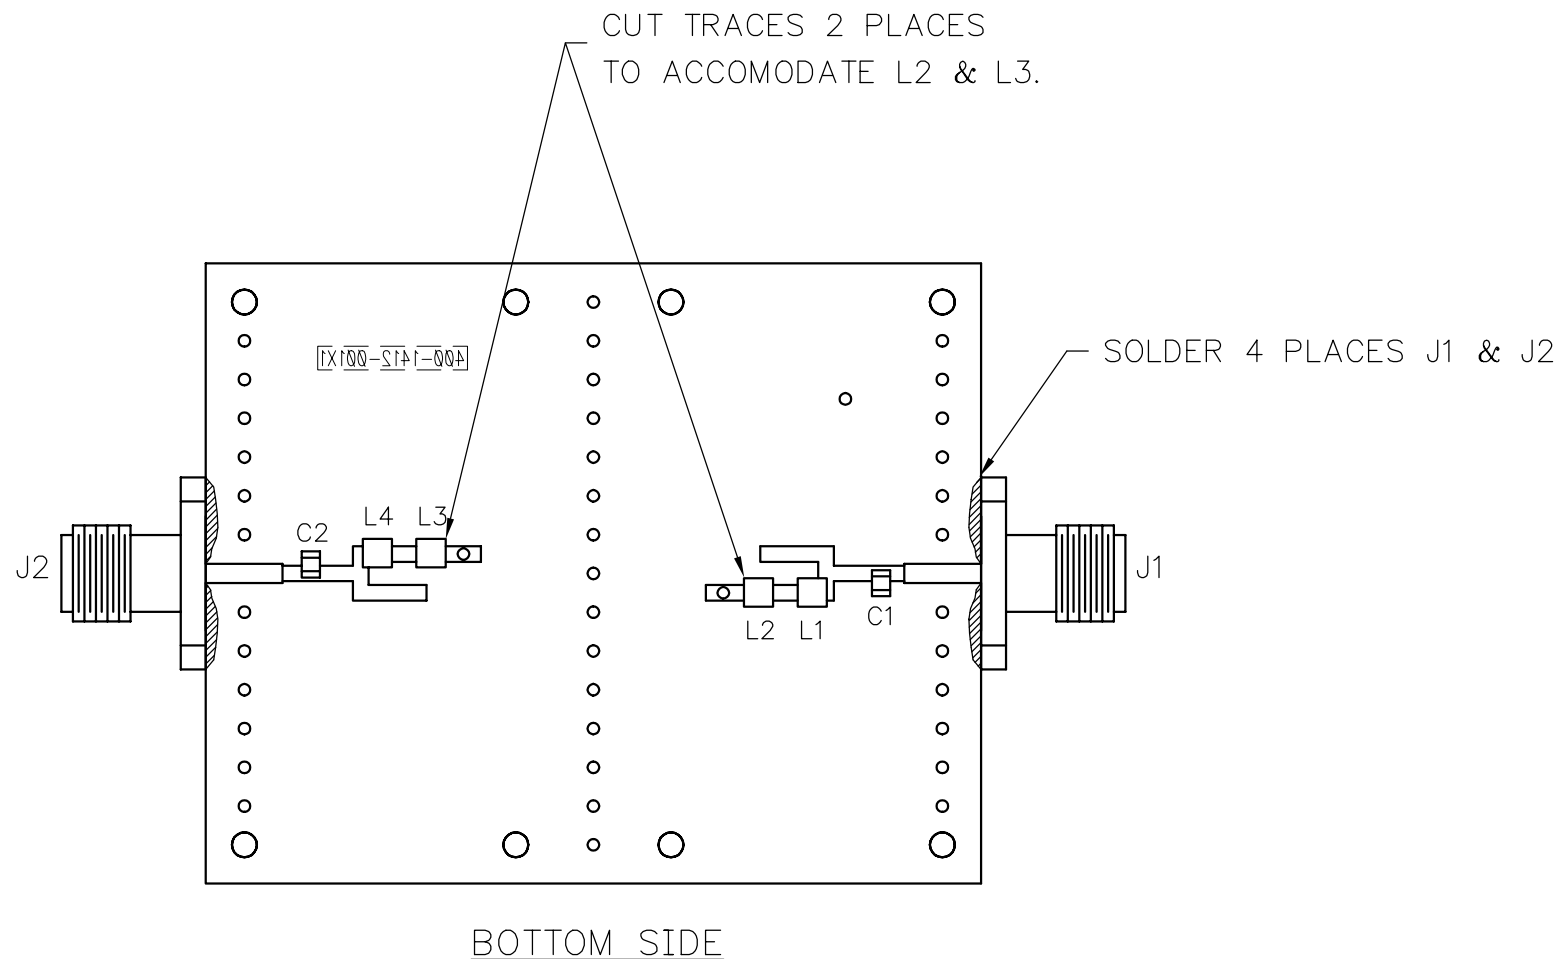

Rev B

SF1093A



E# N/A

#1

Demo

5/28/98

B.C

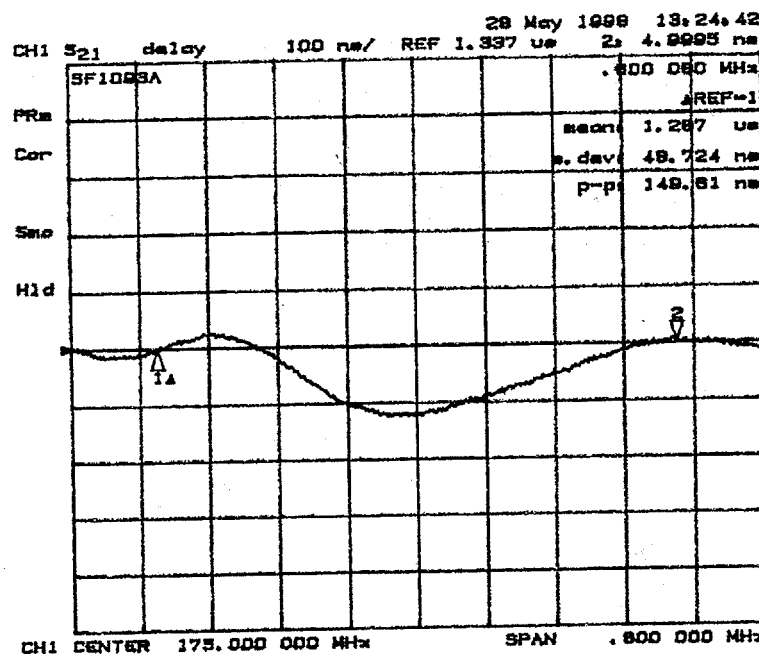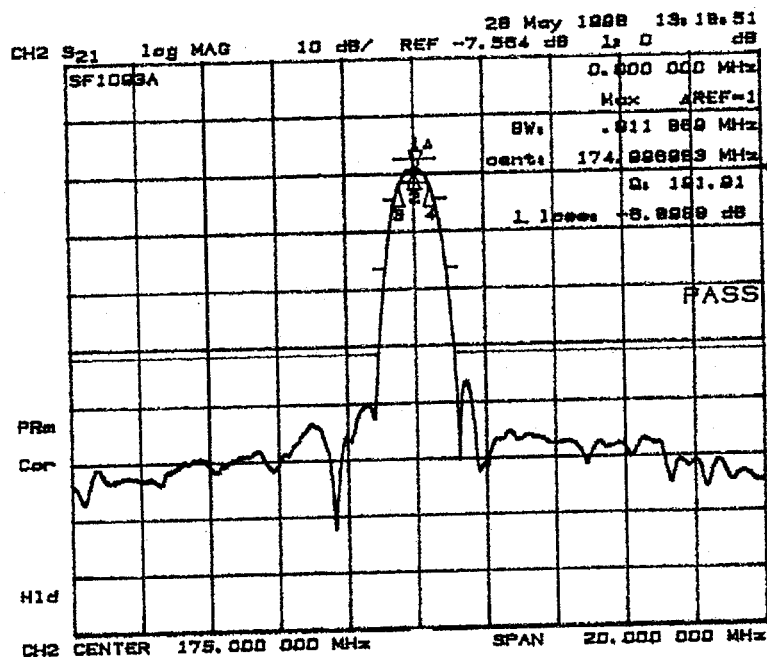

28 May 1998 13:20:47

CH2 S11 1 U FS 1 49.949 n 20.88 n 18.081 nH

SF1093A



175.000 000 MHz

28 May 1998 13:22:45

CH2 S22 1 U FS 1 30.835 n 7.0878 n 6.4481 nH

SF1093A

175.000 000 MHz

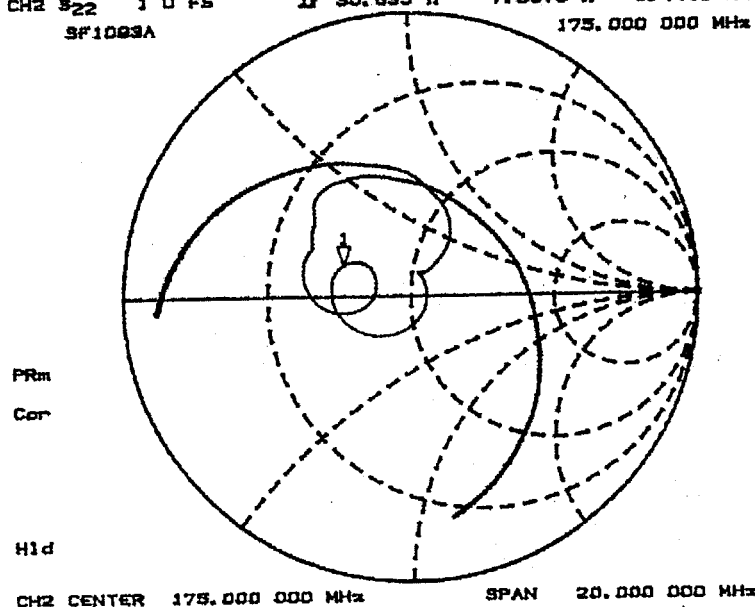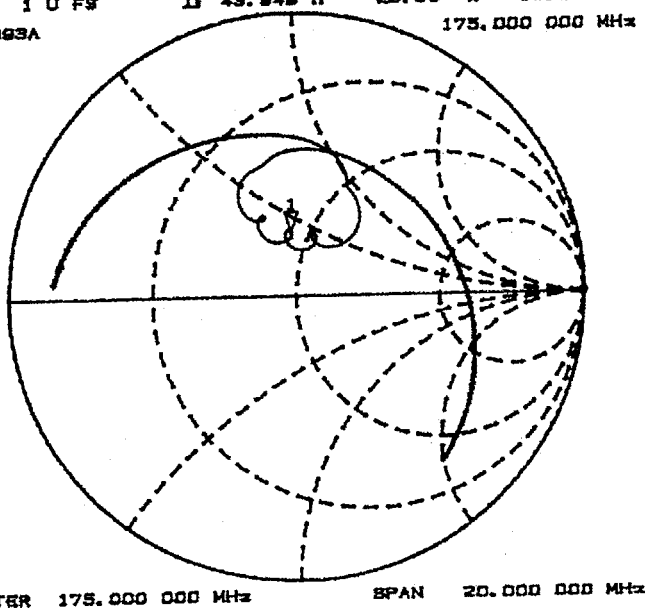

SF1093A-000 REV.A SA 4/4

C1=27pF

C2=33pF

L1, L4=

150 nH

L3=4.7pH

102225

BILL OF MATERIALS

<u>PART IDENTIFIER</u>	<u>DESCRIPTION 1</u>	<u>DESCRIPTION 2</u>	<u>QTY/ASSY</u>	<u>REFERENCE DESCRIPTION</u>
SF1093A-DEMO	DEMO BOARD,SF1093A			
SF1093A-000	ASSY DIAGRAM,DEMO BOARD	SF1093A	0	
400-1412-001	PCB, DEMO, 13MM, TYPE 2		1.0000	PCB
500-0003-270	CAP,CHIP,NPO,27(J),STD		1.0000	C 1
500-0003-330	CAP,CHIP,NPO,33(J),STD		1.0000	C 2
500-0248-001	CONN,COAX,FLANGE MT.JACK	4 HOLE	2.0000	J 1,2
500-0010-150	IND,CHIP,1008CS,15NH,10%		2.0000	L 1,4
500-0010-047	IND,CHIP,1008CS,4.7NH,10%		2.0000	L 2,3



SIZE

A

FSCM NO.

2U874

DWG NO.

SF1093A-DEMO

SCALE

NONE

W/O or ECN

6797

REV

A

SHEET

1

OF

2

REV HISTORY	
-------------	--

[illegible]

	FRFM	SIZE A	FSCM NO. 2U874	DWG NO. SF1093A-DEMO	
	SCALE NONE	W/O or ECN 6797		REV A	SHEET 2 OF 2



SIZE

A

FSCM NO.

2U874

DWG NO.

SF1093A-DEMO

SCALE

NONE

W/O or ECN

6797

REV

A

SHEET

2

OF

2