

SNAP-IN BEZELS FOR DMS-20PC/30PC/40PC RED LED METERS

DATEL part numbers 5252-01160-0 (for DMS-30PC and DMS-40PC red LED meters) and 5252-01161-0 (for DMS-20PC red LED meters) can be used when DMS meters are mounted on a pc-board which is situated behind a panel. Both bezels are made of black ABS plastic and easily snap into appropriately-sized cutouts (see chart for cutout dimensions) in metal panels whose thickness is between 0.040"(1.0mm) and 0.125"(3.2mm).

Both bezels come with a snap-in, 0.030"(0.8mm) thick, red acrylic lens which provides excellent on/off contrast. For optimum digit clarity, the spacing between the meter's front surface and the lens should be less than 0.200"(5.1mm). See application Note 16 for more information on behind-the-panel mounting.

DMS Accessories


Panel-Mounting Hardware




Bezel Dimensions	A	B	C	D
5252-01161-0	1.343	1.906	1.375	0.812
DMS-20PC	(34.1)	(48.4)	(34.9)	(20.6)
5252-01160-0	1.343	2.531	2.0	0.812
DMS-30PC/40PC	(34.1)	(64.3)	(50.8)	(20.6)
Cutout Dimensions		Height	Width	
5252-01161-0		1.156	1.750	
DMS-20PC		(29.4)	(44.5)	
5252-01160-0		1.156	2.375	
DMS-30PC/40PC		(29.4)	(60.3)	
Filter Dimensions		Height	Width	
5252-01161-0		0.875	1.437	
DMS-20PC		(22.2)	(36.5)	
5252-01160-0		0.875	2.087	
DMS-30PC/40PC		(22.2)	(53.0)	

Dimensions: in. (mm) Tolerances: ± 0.008 (± 0.2)

Filter Material is 0.030" (0.8) thick

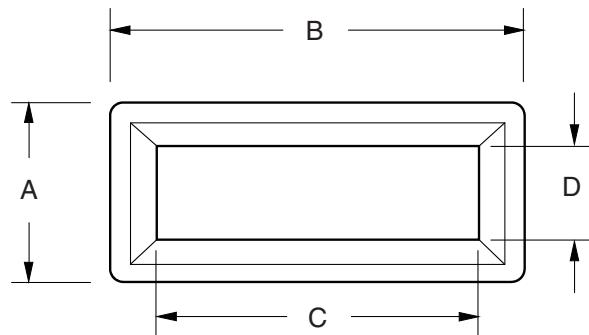

BEZEL AND FILTER INSTALLATION

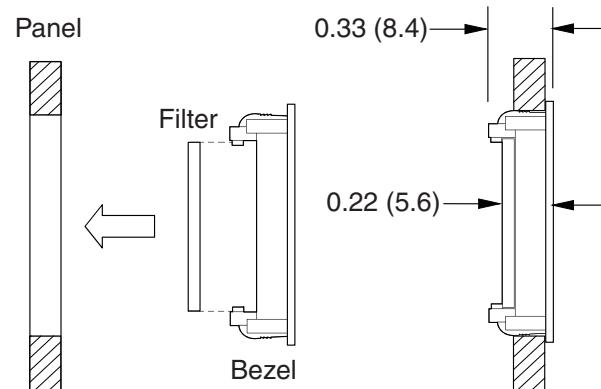

For full details go to
www.murata-ps.com/rohs


RETAINING CLIPS FOR DMS-20 AND DMS-30/40

Part numbers 5252-01126-0 (for all DMS-30/40 meters) and 5252-01127-0 (for all DMS-20 meters) metal retaining clips can be used as spares for damaged or lost clips and for securing blank cases to panels.

Clip Dimensions	A	B
5252-01127-0	1.71	1.21
DMS-20PC	(43.4)	(30.7)
5252-01126-0	2.50	1.25
DMS-30PC/40PC	(63.5)	(31.8)

Dimensions: in. (mm)

Tolerances: ± 0.02 (± 0.5)

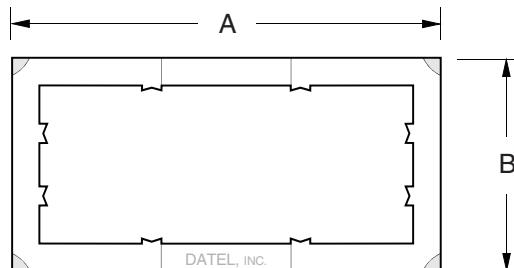

RED CASES FOR DMS-20PC/30PC/40PC APPLICATIONS


DATEL part numbers 5252-01145-0 (DMS-30/40PC size) and 5252-01130-0 (DMS-20PC size) are the same red plastic cases used in DMS-30/40 and DMS-20PC red LED display meters. These "blank" cases can be utilized to cover unused cutouts in multiple-meter applications. They can also be used to achieve a uniform appearance in applications which combine a red LED DMS meter with a user-supplied red LED display. Both cases can be secured to the panel in the same manner as their meter counterparts, that is, with either 5252-01120-0 (for DMS-30/40's) and 5252-01127-0 (for DMS-20's) retaining clips, or with DMS-BZL1 (for DMS-30/40's) and DMS-BZL3 (for DMS-20's) bezel assemblies.

Both cases are made from 0.040" (1.0mm) thick red polycarbonate plastic and are supplied with a removable protective film on their front surface which reduces scratching during handling and installation.

Case Dimensions	A	B	C	D	E	F
5252-01130-0	0.475	0.040	0.025	0.800	0.880	1.380
DMS-20PC	(12.1)	(1.0)	(0.6)	(20.3)	(22.4)	(35.1)
5252-01145-0	0.560	0.040	0.030	0.850	0.925	2.165
DMS-30PC/40PC	(14.1)	(1.0)	(0.8)	(21.6)	(23.5)	(55.0)

Dimensions: in. (mm)

Tolerances: ± 0.008 (± 0.2)

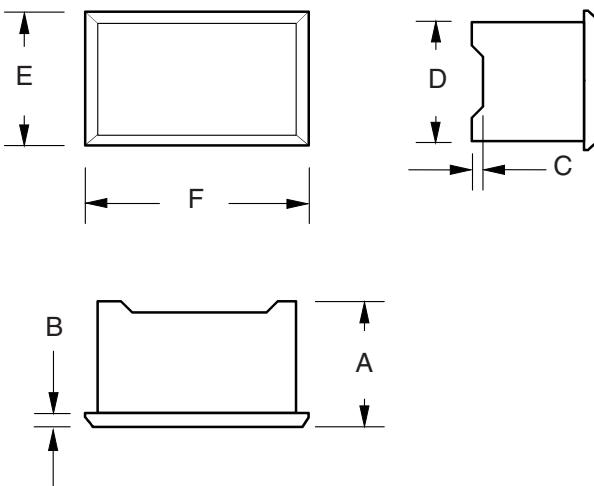

Panel Cutouts: See the Mechanical Specifications section of the DMS-20PC or DMS-30PC Series product data sheets for detailed panel cutout and panel mounting dimensions.


CUTOUT ADAPTER FOR DMS-20/30/40 METERS

DATEL offers two 0.020" (0.5mm) lexan adapter plates which, when used with DMS-BZL1 or DMS-BZL3 bezel assemblies, can compensate for irregular, less precise panel cutouts. These adapter plates can also be used to compensate for slightly larger cutouts when designing-in DATEL meters as alternate sources. 4652-01101-0 fits all DMS-30/40 meters and 4652-01100-0 fits all DMS-20 meters. As shown in the illustrations, the adapter plate is first placed around the meter's case and then the bezel assembly is installed in the normal manner using its factory-supplied hardware.

Adapter Dimensions	A	B	C	D
4652-01100-0 DMS-20PC	1.290 (32.8)	1.315 (33.4)	0.815 (20.7)	1.850 (47.0)
4652-01101-0 DMS-30PC/40PC	1.290 (32.8)	2.110 (53.6)	0.870 (22.1)	2.570 (65.3)


Dimensions: in. (mm) Tolerances: ± 0.008 (± 0.2)

Adapter Plate is 0.020 (0.5) thick

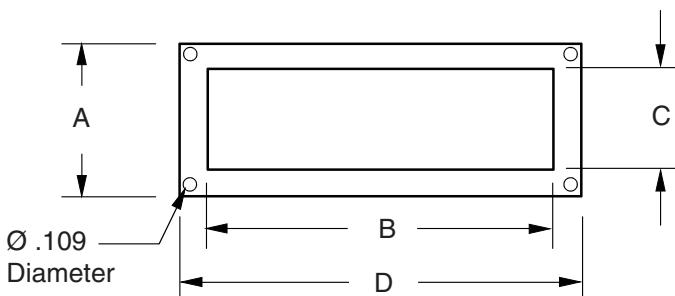

ADAPTER PLATE INSTALLATION

Panel

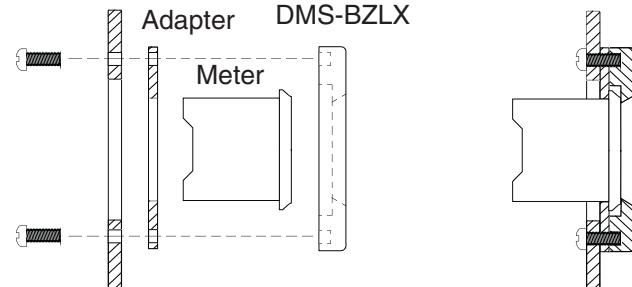

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata](#):

[4652-01100-0](#) [4652-01101-0](#) [5252-01126-0](#) [5252-01127-0](#) [5252-01130-0](#) [5252-01145-0](#) [5252-01160-0](#) [5252-01161-0](#)