

Ceramic Monoblock Bandpass Filter



WIRELESS COMPONENTS

Model KFF6401A Technical Data

Features:

- Small Size
- High Performance

Description and Applications:

This 3 pole monoblock filter is designed primarily for L1 band GPS applications at 1575 MHz in the radionavigation band.



Electrical Specifications


Parameters	Frequency	Specifications @ 25°C
Insertion Loss	1565.4 MHz to 1585.4 MHz	1.0 dB max.
Forward Return Loss		12.0 dB min.
Attenuation	1500.4 MHz	29.0 dB min.
Attenuation	1650.4 MHz	29.0 dB min.
Power Rating		1W
Impedance		50Ω

NOTE: Supplier shall test each filter to the critical electrical specifications listed above or better. Any subsequent audits may deviate due to measurement repeatability among different test systems. Such deviations shall not exceed the following limits:


Specification	Typical Allowance
Insertion Loss	0.1dB
Return Loss	1.0dB
Stopbands	1.0dB

Rev. 0

Typical Response Curve

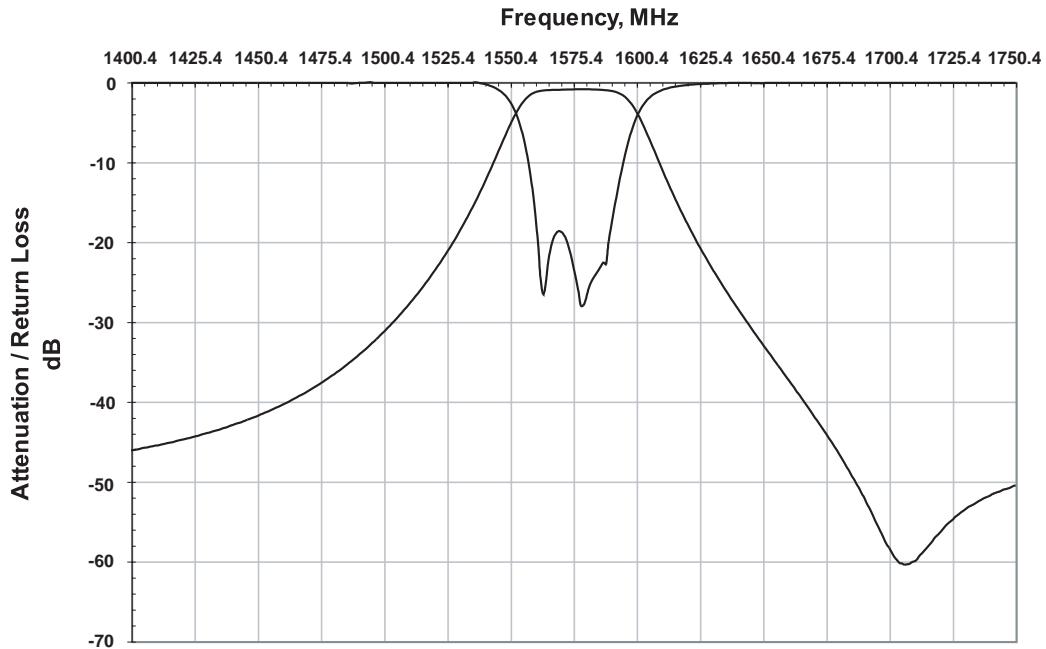


Mechanical Dimensions

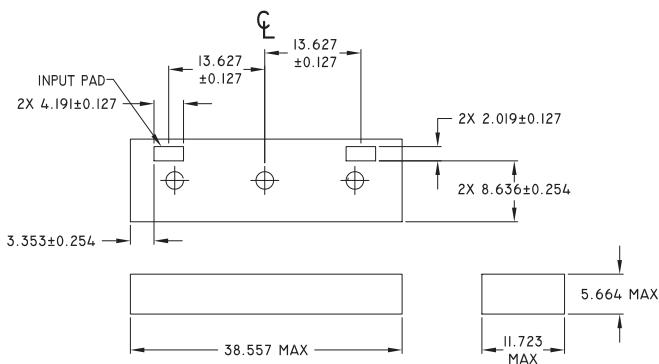


ALL DIMENSIONS IN MM.

Part Marking

Y = LAST DIGIT OF YEAR
 WW = SEQUENTIAL WEEK NUMBER

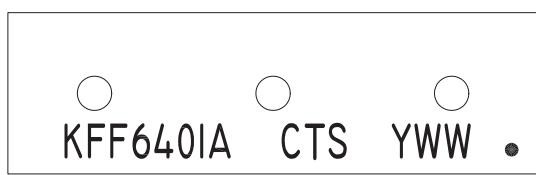


PC Board Layout

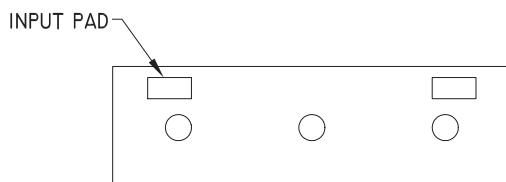

NOTE: MOUNTING IS CUSTOMER SPECIFIC.

Packaging

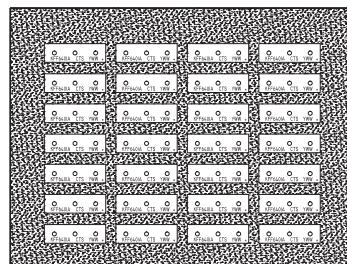

This product is shipped in pre-formed foamed trays.

Contact Information:

CTS WIRELESS COMPONENTS, INC. / 171 Covington Drive / Bloomingdale, IL 60108
 PHONE: (800) 757-6686 / www.ctscorp.com

Document Control #6287104Y01 Rev. 0

Date of Origin 12/05/01

Date of Revision 12/05/01

THIS DATA SHEET IS NOT AN OFFER FOR SALE AND SHALL NOT OBLIGATE CTS TO SELL THE PRODUCTS DESCRIBED HEREIN OR ANY OTHER PRODUCTS. CTS MAY, IN ITS SOLE DISCRETION, MODIFY OR DISCONTINUE THE SALE OF ITS PRODUCTS AT ANY TIME WITHOUT NOTICE. CTS MAKES NO WARRANTY, INCLUDING WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, WITH RESPECT TO THE PRODUCTS REFERENCED OR INFORMATION PROVIDED HEREIN.

CTS® is a registered trademark of CTS Corporation.