

A. Electrical Specifications (@ 25° C)



1. Input Voltage and Frequency; 115/230V 50/60Hz
2. Output Voltage; 28V $\pm$ 5% @ 0.187A
16V $\pm$ 5% @ 0.36A
3. Output Power; 12VA
4. Insulation Resistance;
100M Ω MIN @ 500VDC, Pri to Sec, Pri to Core, Sec to Core
5. Hi-Pot;
1500Vrms 1 minute @ Pri to Sec, Pri to Core
1500Vrms 1 minute @ Sec to Core

B. Marking; PFT12-28, MICROTRAN, date code, country of origin, terminal numbers and safety symbols.


C. Safety:

UL506 General purpose, File No: E79781

D. Schematic Diagram:

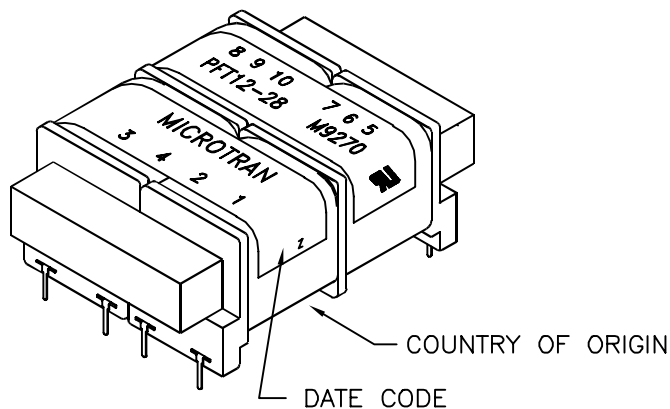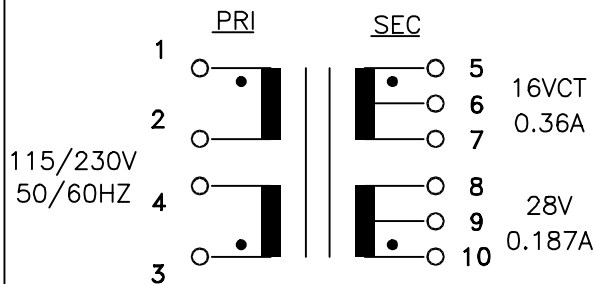

E. Mechanical Specifications:

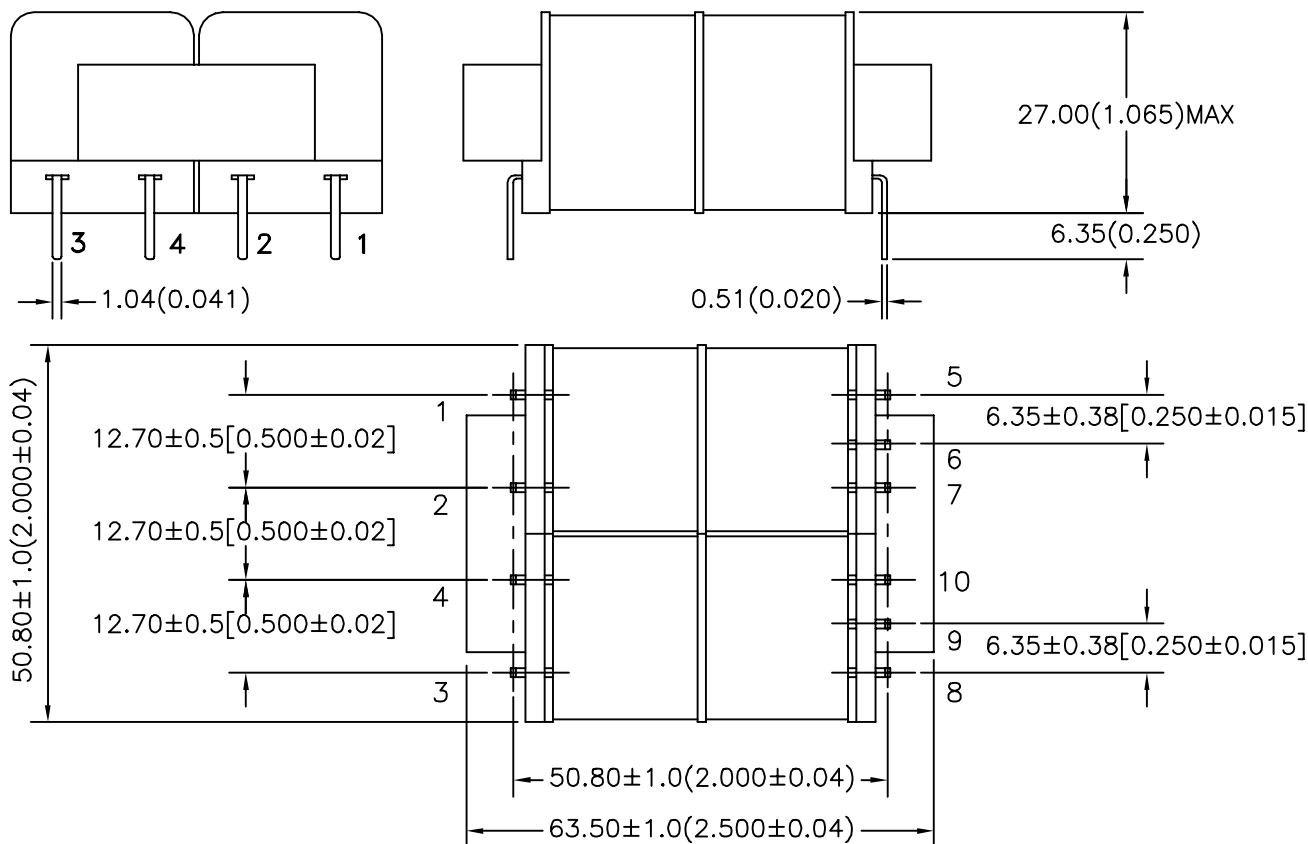

PREPARED BY:

D. Rund
ENGINEER:T. Shiozawa
QUALITY CONTROL:D. Kelley
APPROVED:

J. Coleman

DWG CONTROL NO.
P-A1-12486
ACAD\3F\A1124861.DWG

REV
—

3 FLANGE BOBBIN
POWER TRANSFORMER

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(909) 699-1270 FAX 9096769482

PFT12-28

MODEL SPECIFICATION

DIM: MM(IN) | SCL: NONE | SH: 1 OF 1

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.