

# MN3867S

## PAL-Compatible CCD Video Signal Delay Element


### ■ Overview

The MN3867S is a CCD signal delay element for video signal processing applications.

It contains such components as a threefold-frequency circuit, a shift register clock driver, charge I/O blocks, two CCD analog shift registers switchable between 1700 and 617 stages and between 848.5 and 617 stages, a clamp bias circuit, resampling output amplifiers, and booster circuits.

When the switch input is "L" level, the MN3867S samples the input using the supplied clock signal with a frequency three times the PAL color signal subcarrier frequency (4.43361875 MHz) and, after adding in the attached filter delay, produces independent delays of 1 H (the horizontal scan period) and 2 H for the two lines. When the switch input is "H" level, the MN3867S disables the threefold-frequency circuit and samples the input with the image sensor drive frequency (9.65625 MHz) for the camera's 510 horizontal pixels and, after adding in the attached filter delay, produces independent delays of 1 H (the horizontal scan period) each for the two lines.

### ■ Pin Assignment

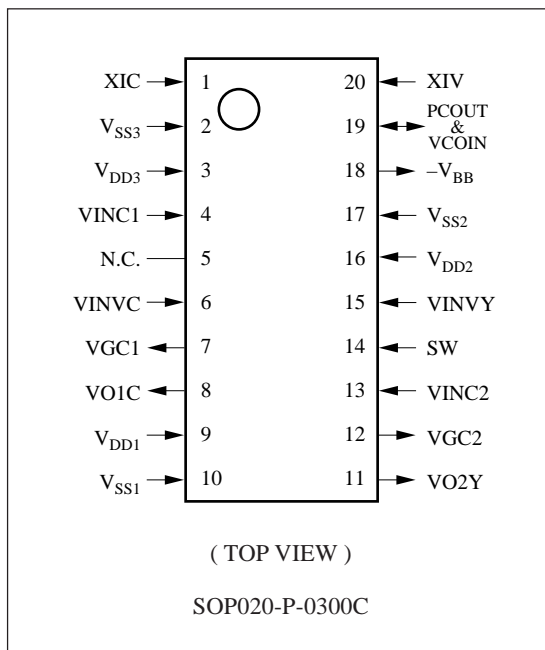


### ■ Features

- Single 5.0 V power supply
- Choice of camera and VCR modes, so that both the camera and VCR portions of a video camera with 510 horizontal pixels can use the same MN3867S for signal processing

### ■ Applications

- Video cameras

# ■ Block Diagram

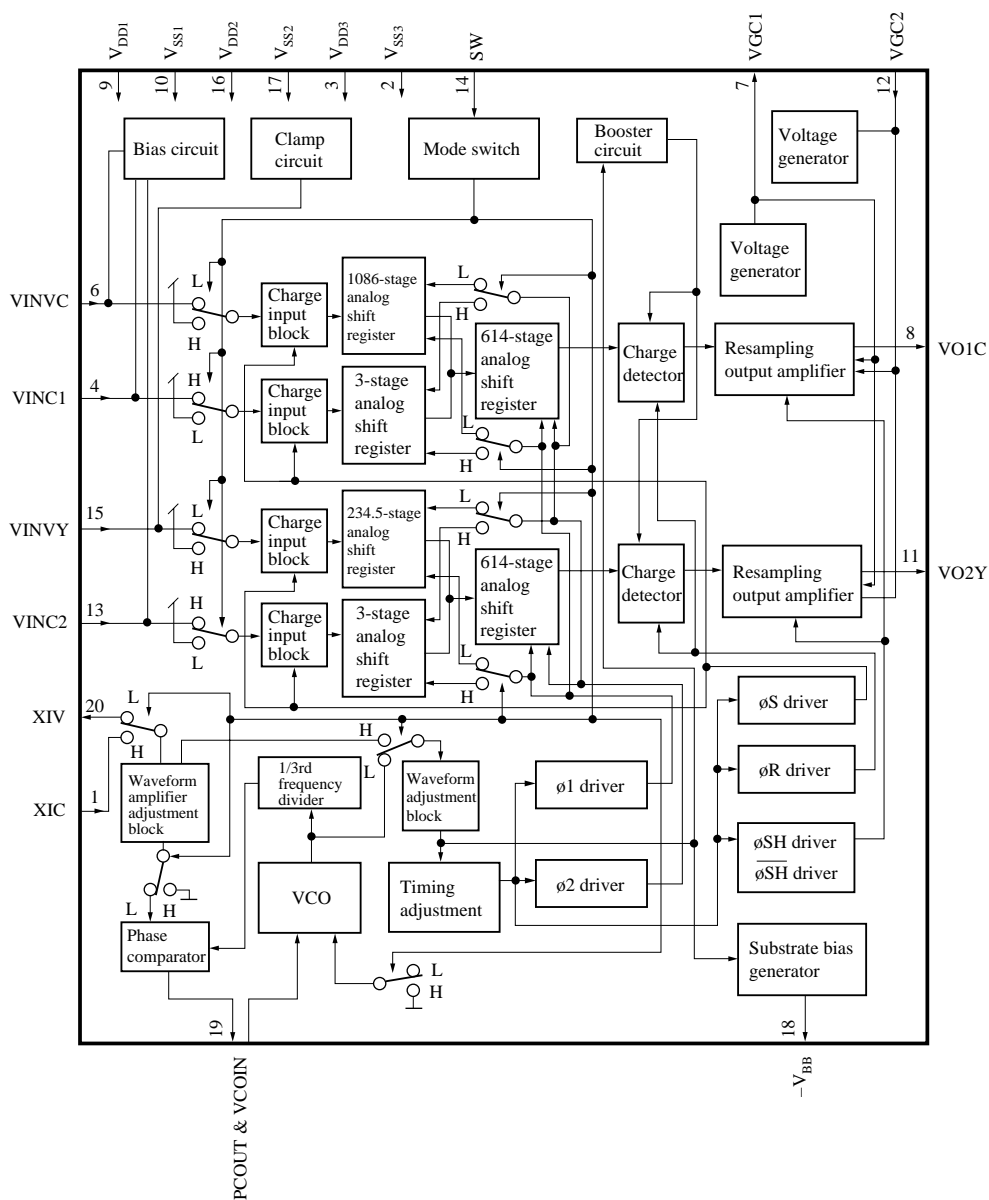

# Pin Descriptions


Pin No.	Symbol	Pin Name	Remarks
1	XIC	9.65625 MHz clock input	
2	V <sub>SS3</sub>	GND (3)	Ground for clock multiplier circuit
3	V <sub>DD3</sub>	Power supply (3)	Power supply for clock multiplier circuit
4	VINC1	Camera signal input (1)	
5	N.C.	No connection	
6	VINVC	Video signal input (C)	
7	VGC1	Output gate connection (1)	
8	VO1C	Signal output (1C)	Output pin for signal fed to pin 4 or pin 6
9	V <sub>DD1</sub>	Power supply (1)	Power supply for analog circuits
10	V <sub>SS1</sub>	GND (1)	Ground for analog circuits
11	VO2Y	Signal output (2Y)	Output pin for signal fed to pin 13 or pin 15
12	VGC2	Output gate connection (2)	
13	VINC2	Camera signal input (2)	
14	SW	Camera/video mode switch	
15	VINVY	Video signal input (Y)	
16	V <sub>DD2</sub>	Power supply (2)	Power supply for digital circuits other than frequency multiplier
17	V <sub>SS2</sub>	GND (2)	Ground for digital circuits other than frequency multiplier
18	-V <sub>BB</sub>	Substrate connection	Negative voltage pin
19	PCOUT&VCOIN	Phase comparator output and voltage controlled oscillator input	
20	XIV	4.43361875 MHz clock input	

## Notes

1: Always connect V<sub>DD1</sub>, V<sub>DD2</sub>, and V<sub>DD3</sub> to the same voltage.

2: Always connect V<sub>SS1</sub>, V<sub>SS2</sub>, and V<sub>SS3</sub> to ground.


# Application Circuit Example

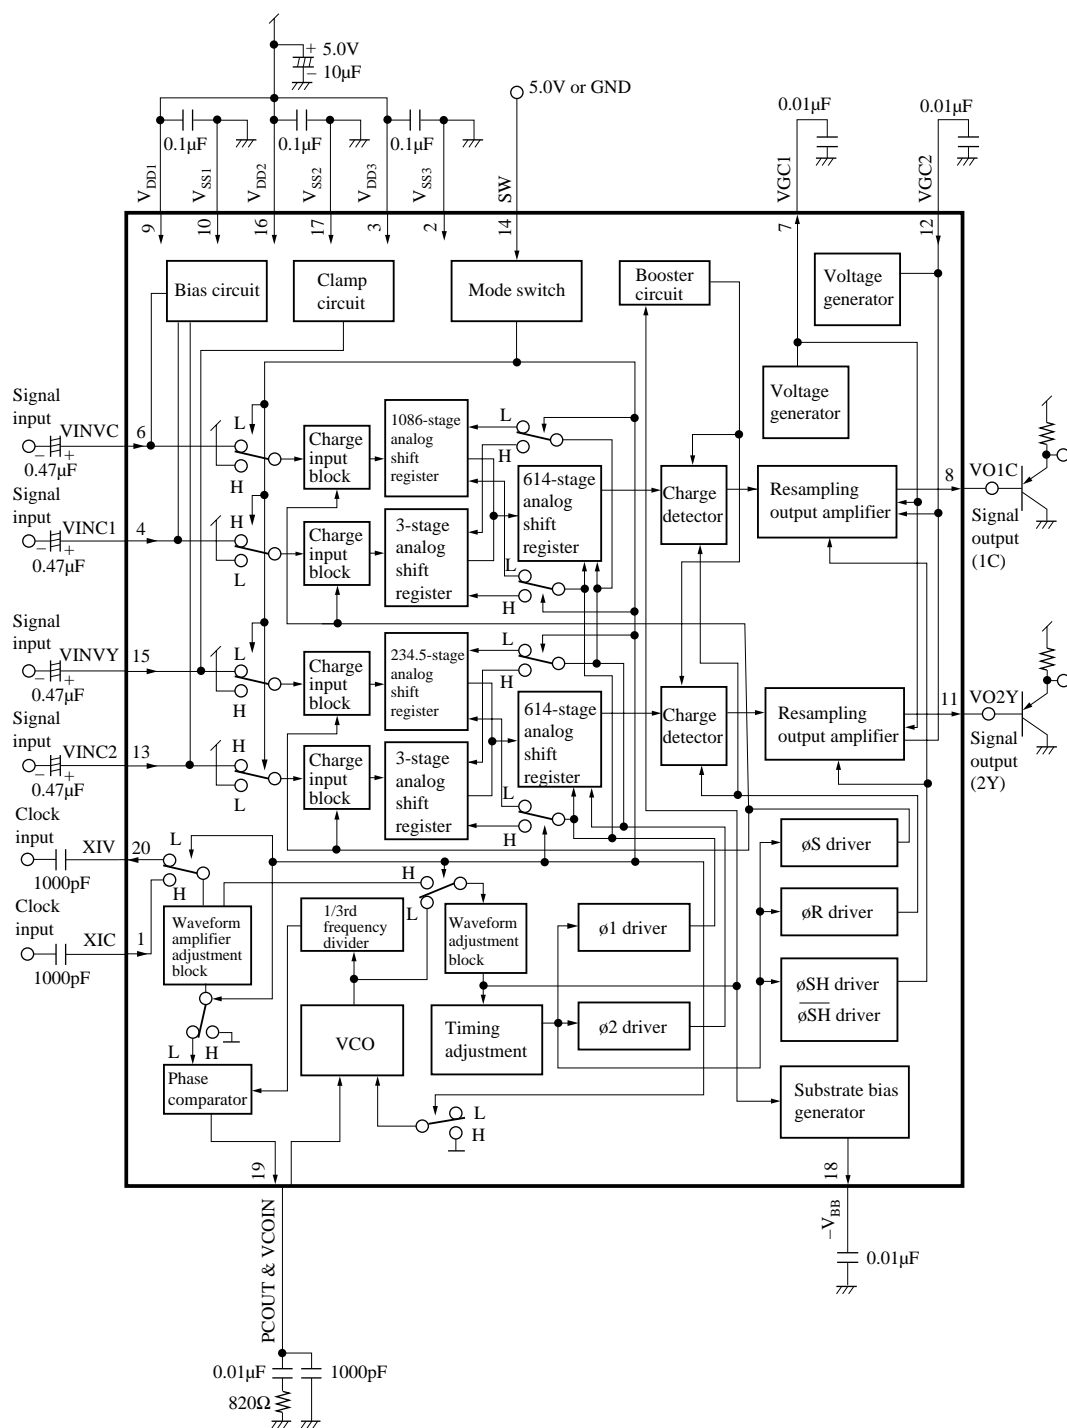

Note: If the capacitor attached to pin 18 has a polarity, attach the negative pole to pin 18.

■ Package Dimensions (Unit:mm)

SOP020-P-0300C

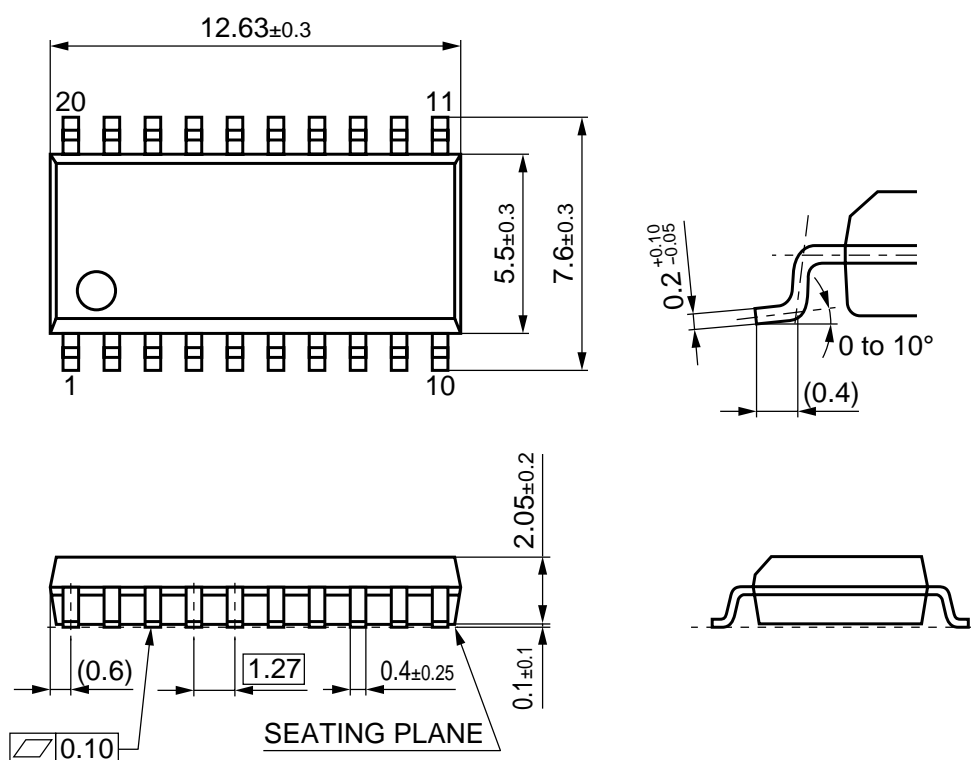

## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technologies described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuit examples of the products. It does not constitute the warranting of industrial property, the granting of relative rights, or the granting of any license.
- (3) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this material are subject to change without notice for reasons of modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, redundant design is recommended, so that such equipment may not violate relevant laws or regulations because of the function of our products.
- (6) When using products for which dry packing is required, observe the conditions (including shelf life and after-unpacking standby time) agreed upon when specification sheets are individually exchanged.
- (7) No part of this material may be reprinted or reproduced by any means without written permission from our company.

## Please read the following notes before using the datasheets

- A. These materials are intended as a reference to assist customers with the selection of Panasonic semiconductor products best suited to their applications.  
Due to modification or other reasons, any information contained in this material, such as available product types, technical data, and so on, is subject to change without notice.  
Customers are advised to contact our semiconductor sales office and obtain the latest information before starting precise technical research and/or purchasing activities.
- B. Panasonic is endeavoring to continually improve the quality and reliability of these materials but there is always the possibility that further rectifications will be required in the future. Therefore, Panasonic will not assume any liability for any damages arising from any errors etc. that may appear in this material.
- C. These materials are solely intended for a customer's individual use.  
Therefore, without the prior written approval of Panasonic, any other use such as reproducing, selling, or distributing this material to a third party, via the Internet or in any other way, is prohibited.