

120MHz, Ultra-Low Noise Precision Operational Amplifiers

July 1997

Features

- Slew Rate 35V/ μ s
- Wide Gain Bandwidth ($A_V \geq 10$) 120MHz
- Low Noise 3nV/ $\sqrt{\text{Hz}}$ at 1kHz
- Low V_{OS} 10 μ V
- High CMRR 126dB
- High Gain 1800V/mV

Applications

- High Speed Signal Conditioners
- Wide Bandwidth Instrumentation Amplifiers
- Low Level Transducer Amplifiers
- Fast, Low Level Voltage Comparators
- Highest Quality Audio Preamplifiers
- Pulse/RF Amplifiers

Ordering Information

| PART NUMBER (BRAND) | TEMP. RANGE ($^{\circ}\text{C}$) | PACKAGE | PKG. NO. |
|------------------------|---------------------------------------|-----------------|-------------|
| HA2-5147-2 | -55 to 125 | 8 Pin Metal Can | T8.C |
| HA2-5147-5 | 0 to 75 | 8 Pin Metal Can | T8.C |
| HA2-5147A-2 | -55 to 125 | 8 Pin Metal Can | T8.C |
| HA2-5147A-5 | 0 to 75 | 8 Pin Metal Can | T8.C |
| HA3-5147-5 | 0 to 75 | 8 Ld PDIP | E8.3 |
| HA7-5147-2 | -55 to 125 | 8 Ld Cerdip | F8.3A |
| HA7-5147-5 | 0 to 75 | 8 Ld Cerdip | F8.3A |
| HA7-5147A-2 | -55 to 125 | 8 Ld Cerdip | F8.3A |
| HA7-5147A-5 | 0 to 75 | 8 Ld Cerdip | F8.3A |
| HA9P5147-9 (H51479) | -40 to 85 | 8 Ld SOIC | M8.15 |

Description

The HA-5147 operational amplifier features an unparalleled combination of precision DC and wideband high speed characteristics. Utilizing the Harris D. I. technology and advanced processing techniques, this unique design unites low noise (3nV/ $\sqrt{\text{Hz}}$) precision instrumentation performance with high speed (35V/ μ s) wideband capability.

This amplifier's impressive list of features include low V_{OS} (10 μ V), wide gain bandwidth (120MHz), high open loop gain (1800V/mV), and high CMRR (126dB). Additionally, this flexible device operates over a wide supply range ($\pm 5\text{V}$ to $\pm 20\text{V}$) while consuming only 140mW of power.


Using the HA-5147 allows designers to minimize errors while maximizing speed and bandwidth in applications requiring gains greater than ten.

This device is ideally suited for low level transducer signal amplifier circuits. Other applications which can utilize the HA-5147's qualities include instrumentation amplifiers, pulse or RF amplifiers, audio preamplifiers, and signal conditioning circuits. Further application ideas are given in Application Note 553, Harris AnswerFAX (407-724-7800) document #9553.


This device can easily be used as a design enhancement by directly replacing the 725, OP25, OP06, OP07, OP27 and OP37 where gains are greater than ten. For military grade product, refer to the HA-5147/883 data sheet.

Pinouts

HA-5147 (CERDIP, PDIP, SOIC)
HA-5147A (CERDIP, PDIP)
TOP VIEW



HA-5147, HA-5147A
(METAL CAN)
TOP VIEW



HA-5147, HA-5147A

Absolute Maximum Ratings $T_A = 25^\circ\text{C}$

Voltage Between V+ and V- Terminals $\pm 44\text{V}$
 Differential Input Voltage (Note 1)..... 0.7V
 Output Current Full Short Circuit Protection

Operating Conditions

Temperature Range
 HA-5147/47A-2 -55°C to 125°C
 HA-5147/47A-5 0°C to 75°C
 HA-5147-9 -40°C to 85°C

Thermal Information

Thermal Resistance (Typical, Note 2) θ_{JA} ($^\circ\text{C}/\text{W}$) θ_{JC} ($^\circ\text{C}/\text{W}$)
 CERDIP Package 135 50
 Can Package 165 80
 PDIP Package 120 N/A
 SOIC Package 158 N/A
 Maximum Junction Temperature (Hermetic Package)..... 175°C
 Maximum Junction Temperature (Plastic Package)..... 150°C
 Maximum Storage Temperature Range -65°C to 150°C
 Maximum Lead Temperature (Soldering 10s)..... 300°C
 (SOIC - Lead Tips Only)

Die Characteristics

Back Side Potential V-
 Number of Transistors 63

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTES:

- For differential input voltages greater than 0.7V , the input current must be limited to 25mA to protect the back-to-back input diodes.
- θ_{JA} is measured with the component mounted on an evaluation PC board in free air.

Electrical Specifications $V_{\text{SUPPLY}} = \pm 15\text{V}$, $C_L \leq 50\text{pF}$, $R_S \leq 100\Omega$

| PARAMETERS | TEST CONDITIONS | TEMP. (°C) | HA-5147 | | | HA-5147A | | | UNITS |
|--|---|---------------|---------|-------|------|----------|-------|------|-------------------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| INPUT CHARACTERISTICS | | | | | | | | | |
| Offset Voltage | | 25 | - | 30 | 100 | - | 10 | 25 | μV |
| | | Full | - | 70 | 300 | - | 30 | 60 | μV |
| Average Offset Voltage Drift | | Full | - | 0.4 | 1.8 | - | 0.2 | 0.6 | μV/°C |
| Bias Current | | 25 | - | 15 | 80 | - | 10 | 40 | nA |
| | | Full | - | 35 | 150 | - | 20 | 60 | nA |
| Offset Current | | 25 | - | 12 | 75 | - | 7 | 35 | nA |
| | | Full | - | 30 | 135 | - | 15 | 50 | nA |
| Common Mode Range | | Full | ±10.3 | ±11.5 | - | ±10.3 | ±11.5 | - | V |
| Differential Input Resistance (Note 3) | | 25 | 0.8 | 4 | - | 1.5 | 6 | - | MΩ |
| Input Noise Voltage (Note 4) | 0.1Hz to 10Hz | 25 | - | 0.09 | 0.25 | - | 0.08 | 0.18 | μV _{P-P} |
| Input Noise Voltage Density (Note 5) | f = 10Hz | 25 | - | 3.8 | 8.0 | - | 3.5 | 8.0 | nV/√Hz |
| | f = 100Hz | | - | 3.3 | 4.5 | - | 3.1 | 4.5 | nV/√Hz |
| | f = 1000Hz | | - | 3.2 | 3.8 | - | 3.0 | 3.8 | nV/√Hz |
| Input Noise Current Density (Note 5) | f = 10Hz | 25 | - | 1.7 | - | - | 1.7 | 4.0 | pA/√Hz |
| | f = 100Hz | | - | 1.0 | - | - | 1.0 | 2.3 | pA/√Hz |
| | f = 1000Hz | | - | 0.4 | 0.6 | - | 0.4 | 0.6 | pA/√Hz |
| TRANSFER CHARACTERISTICS | | | | | | | | | |
| Minimum Stable Gain | | 25 | 10 | - | - | 10 | - | - | V/V |
| Large Signal Voltage Gain | V _{OUT} = ±10V, R _L = 2kΩ | 25 | 700 | 1500 | - | 1000 | 1800 | - | V/mV |
| | | Full | 300 | 800 | - | 600 | 1200 | - | V/mV |

HA-5147, HA-5147A

Electrical Specifications $V_{\text{SUPPLY}} = \pm 15\text{V}$, $C_L \leq 50\text{pF}$, $R_S \leq 100\Omega$ (Continued)

| PARAMETERS | TEST CONDITIONS | TEMP. (°C) | HA-5147 | | | HA-5147A | | | UNITS |
|-------------------------------|------------------------------|---------------|---------|-------|-----|----------|-------|-----|-------|
| | | | MIN | TYP | MAX | MIN | TYP | MAX | |
| Common Mode Rejection Ratio | V _{CM} = ±10V | Full | 100 | 120 | - | 114 | 126 | - | dB |
| Gain-Bandwidth-Product | f = 10kHz | 25 | 120 | 140 | - | 120 | 140 | - | MHz |
| | f = 1MHz | | - | 120 | - | - | 120 | - | MHz |
| OUTPUT CHARACTERISTICS | | | | | | | | | |
| Output Voltage Swing | R _L = 600Ω | 25 | ±10.0 | ±11.5 | - | ±10.0 | ±11.5 | - | V |
| | R _L = 2kΩ | Full | ±11.4 | ±13.5 | - | ±11.7 | ±13.8 | - | V |
| Full Power Bandwidth (Note 6) | | 25 | 445 | 500 | - | 445 | 500 | - | kHz |
| Output Resistance | Open Loop | 25 | - | 70 | - | - | 70 | - | Ω |
| Output Current | | 25 | 16.5 | 25 | - | 16.5 | 25 | - | mA |
| TRANSIENT RESPONSE (Note 7) | | | | | | | | | |
| Rise Time | | 25 | - | 22 | 50 | - | 22 | 50 | ns |
| Slew Rate | V _{OUT} = ±3V | 25 | 28 | 35 | - | 28 | 35 | - | V/μs |
| Settling Time | Note 8 | 25 | - | 400 | - | - | 400 | - | ns |
| Overshoot | | 25 | - | 20 | 40 | - | 20 | 40 | % |
| POWER SUPPLY CHARACTERISTICS | | | | | | | | | |
| Supply Current | | 25 | - | 3.5 | - | - | 3.5 | - | mA |
| | | Full | - | - | 4.0 | - | - | 4.0 | mA |
| Power Supply Rejection Ratio | V _S = ±4V to ±18V | Full | - | 16 | 51 | - | 2 | 4 | μV/V |

NOTES:

- This parameter value is based upon design calculations.
- Refer to Typical Performance section of the data sheet.
- The limits for this parameter are guaranteed based on lab characterization, and reflect lot-to-lot variation.
- Full power bandwidth guaranteed based on slew rate measurement using: $\text{FPBW} = \frac{\text{Slew Rate}}{2\pi V_{\text{PEAK}}}$.
- Refer to Test Circuits section of the data sheet.
- Settling time is specified to 0.1% of final value for a 10V output step and $A_V = -10$.

Test Circuits and Waveforms


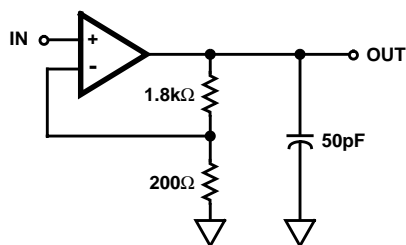



FIGURE 1. LARGE AND SMALL SIGNAL RESPONSE TEST CIRCUIT

Test Circuits and Waveforms (Continued)

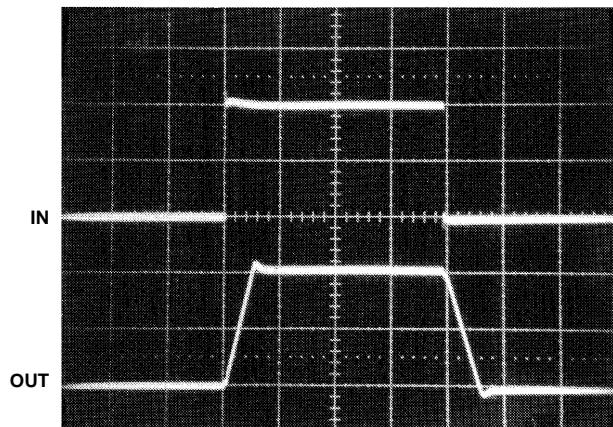


Vertical Scale: Input = 0.5V/Div.
Output = 5V/Div.
Horizontal Scale: 500ns/Div.

LARGE SIGNAL RESPONSE

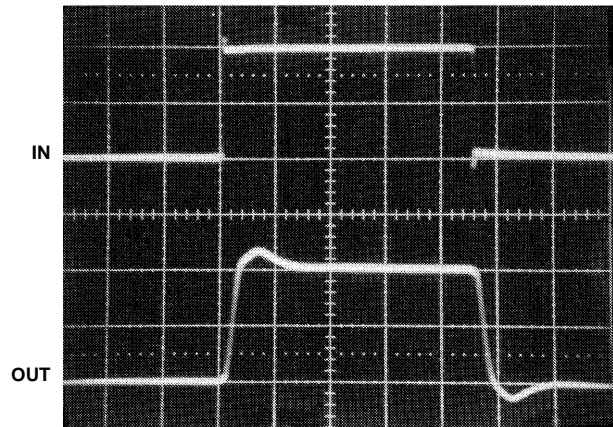

Vertical Scale: Input = 10mV/Div.
Output = 100mV/Div.
Horizontal Scale: 100ns/Div.


SMALL SIGNAL RESPONSE

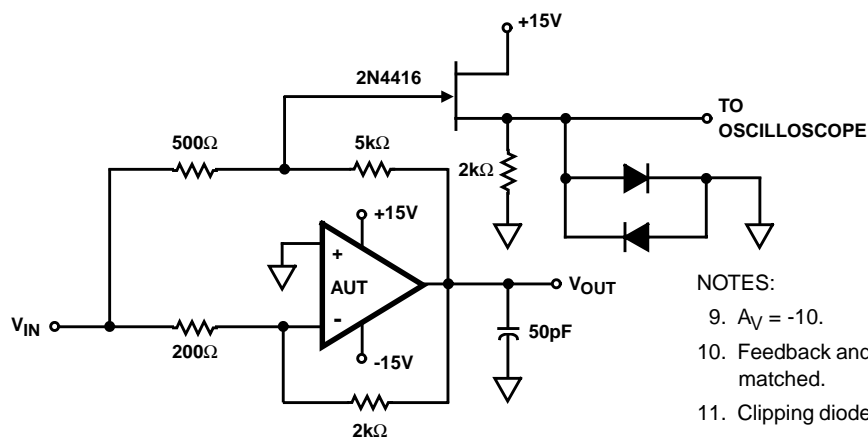


NOTES:

9. $A_V = -10$.
10. Feedback and summing resistors should be 0.1% matched.
11. Clipping diodes are optional. HP5082-2810 recommended.

FIGURE 2. SETTLING TIME TEST CIRCUIT

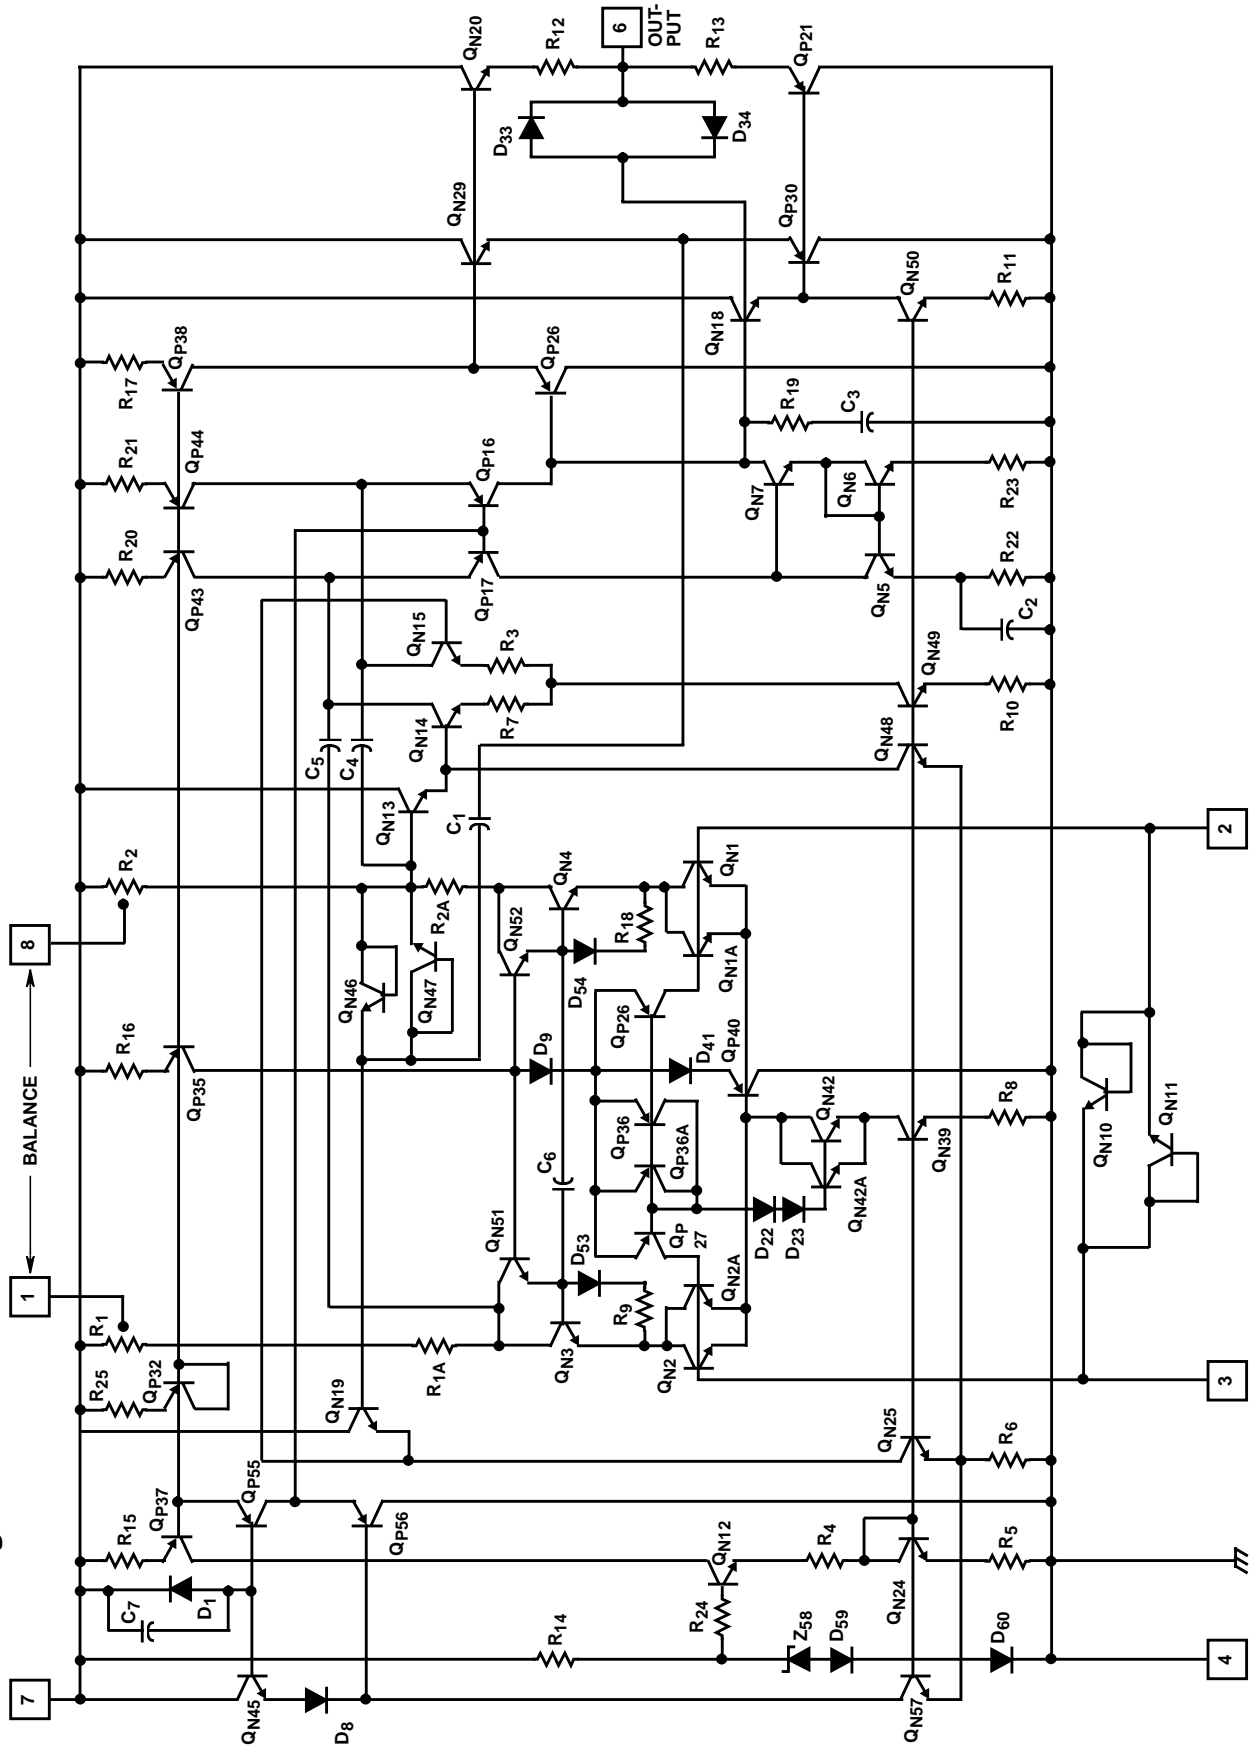


Application Information

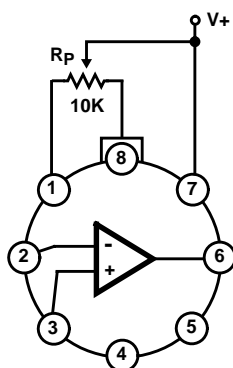

NOTE: Tested Offset Adjustment Range is $|V_{OS} + 1\text{mV}|$ minimum referred to output. Typical range is $\pm 4\text{mV}$ with $R_P = 10\text{k}\Omega$.

FIGURE 3. SUGGESTED OFFSET VOLTAGE ADJUSTMENT

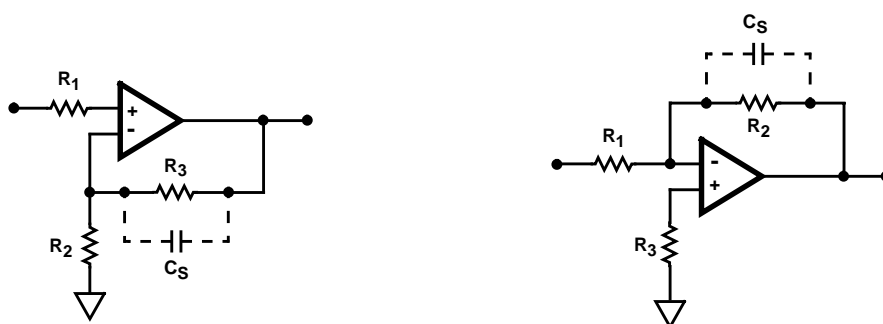

NOTE: Low resistances are preferred for low noise applications as a $1\text{k}\Omega$ resistor has $4\text{nV}/\sqrt{\text{Hz}}$ of thermal noise. Total resistances of greater than $10\text{k}\Omega$ on either input can reduce stability. In most high resistance applications, a few picofarads of capacitance across the feedback resistor will improve stability.

FIGURE 4. SUGGESTED STABILITY CIRCUITS

Typical Performance Curves $T_A = 25^\circ\text{C}$, $V_{\text{SUPPLY}} = \pm 15\text{V}$, Unless Otherwise Specified

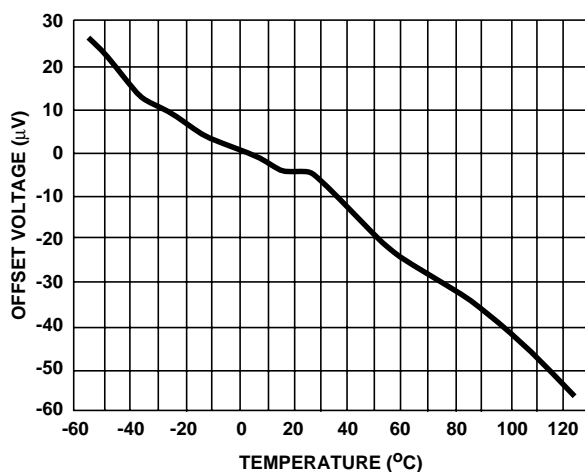


FIGURE 5. TYPICAL OFFSET VOLTAGE vs TEMPERATURE

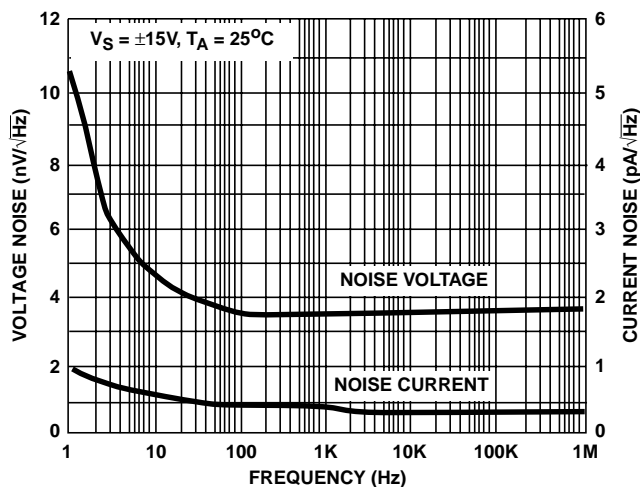


FIGURE 6. NOISE CHARACTERISTICS

Typical Performance Curves $T_A = 25^\circ\text{C}$, $V_{\text{SUPPLY}} = \pm 15\text{V}$, Unless Otherwise Specified (Continued)

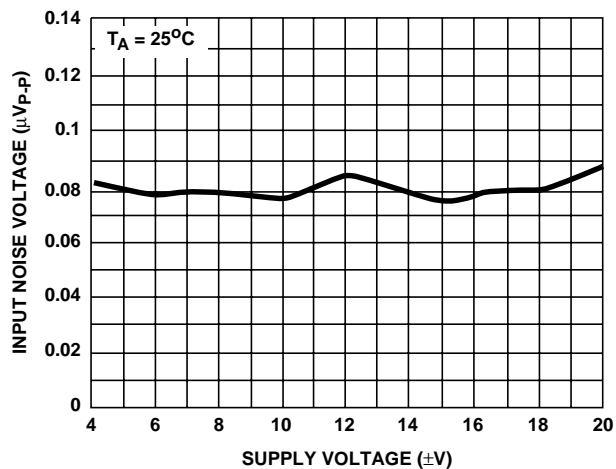


FIGURE 7. NOISE vs SUPPLY VOLTAGE

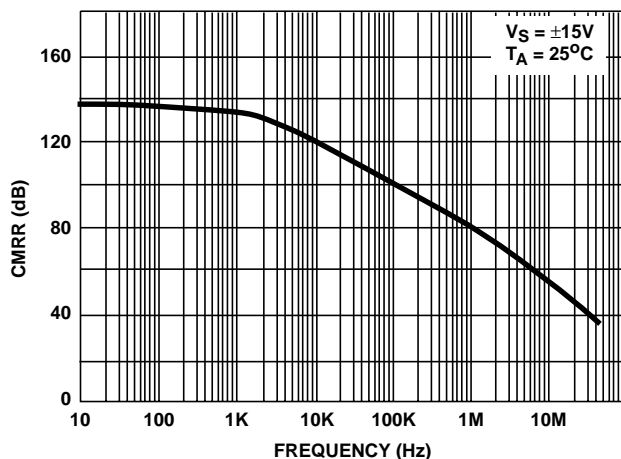


FIGURE 8. CMRR vs FREQUENCY

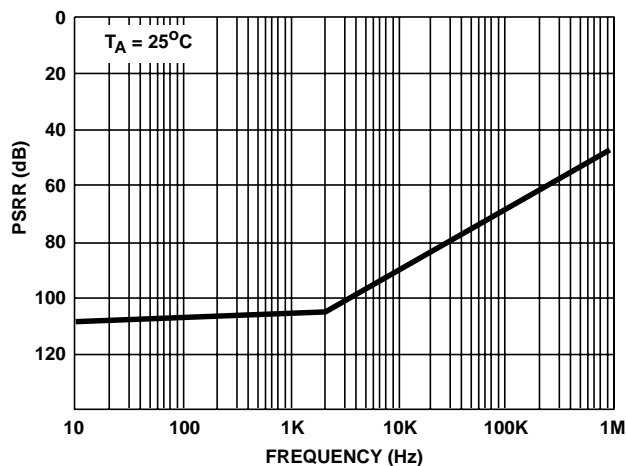


FIGURE 9. PSRR vs FREQUENCY

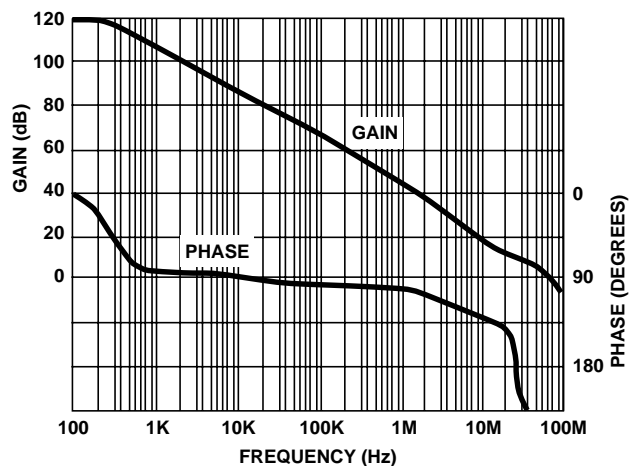


FIGURE 10. OPEN LOOP GAIN AND PHASE vs FREQUENCY

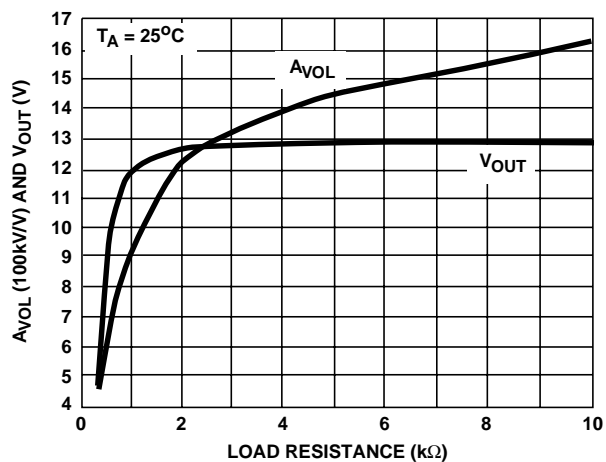


FIGURE 11. A_{VOL} AND V_{OUT} vs LOAD RESISTANCE

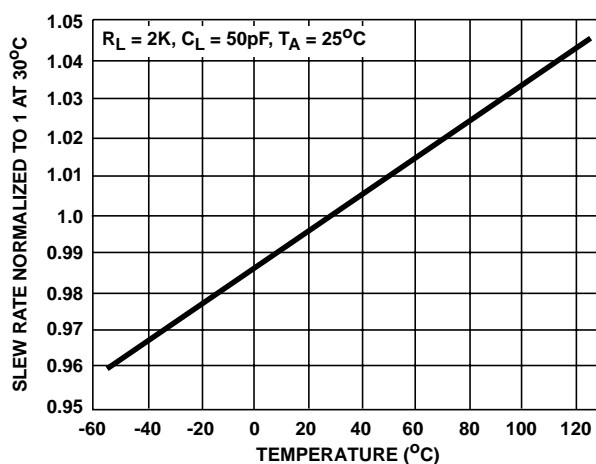


FIGURE 12. NORMALIZED SLEW RATE vs TEMPERATURE

Typical Performance Curves $T_A = 25^\circ\text{C}$, $V_{\text{SUPPLY}} = \pm 15\text{V}$, Unless Otherwise Specified (Continued)

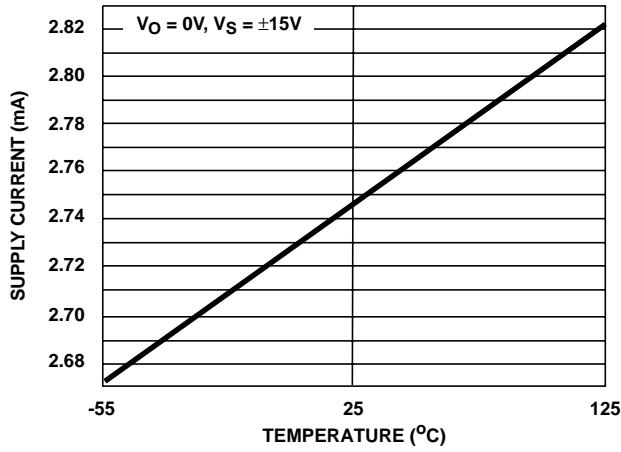


FIGURE 13. SUPPLY CURRENT vs TEMPERATURE

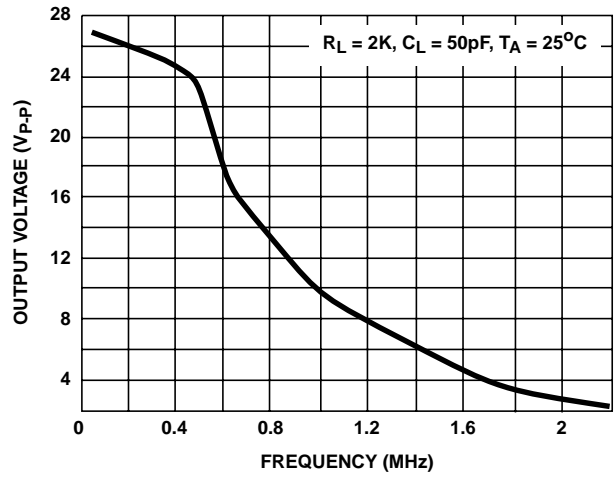


FIGURE 14. $V_{\text{OUT MAX}}$ (UNDISTORTED SINEWAVE OUTPUT) vs FREQUENCY



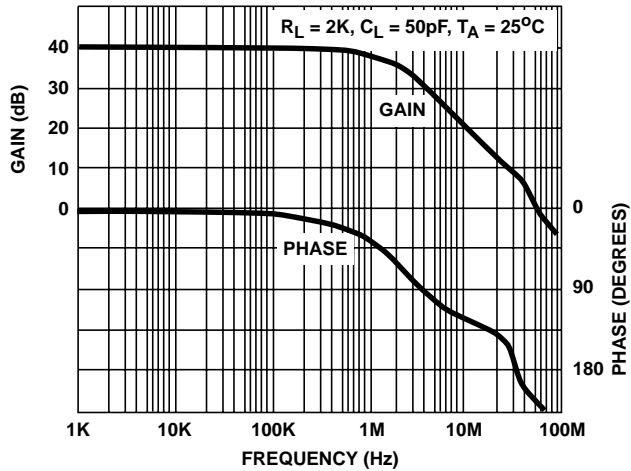


FIGURE 15. CLOSED LOOP GAIN AND PHASE vs FREQUENCY

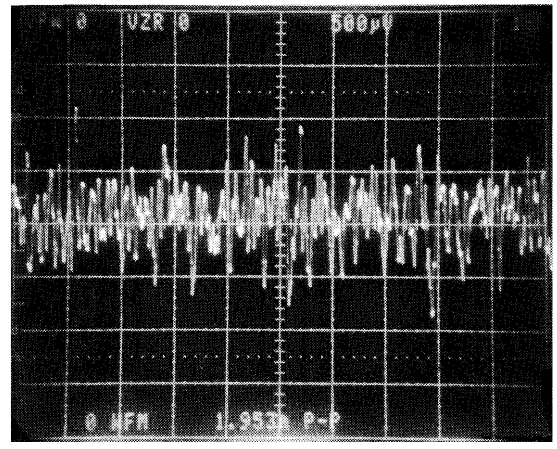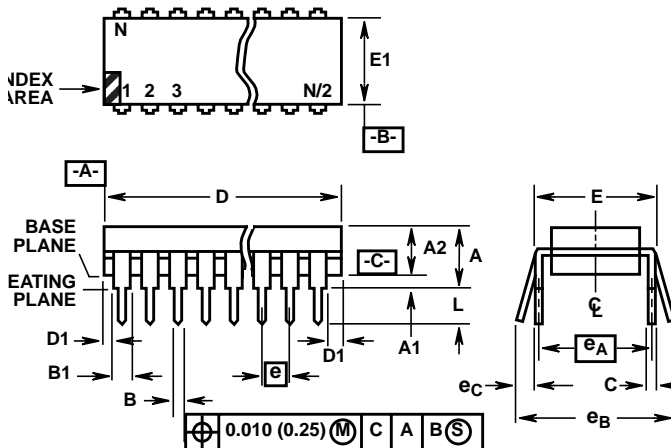

$A_{\text{CL}} = 25,000\text{V/V}$; $E_N = 0.08\mu\text{V}_{\text{P-P RTI}}$
Horizontal Scale = 1s/Div.; Vertical Scale = 0.002 μV /Div.

FIGURE 16. PEAK-TO-PEAK NOISE VOLTAGE (0.1Hz TO 10Hz)


Dual-In-Line Plastic Packages (PDIP)**NOTES:**

1. Controlling Dimensions: INCH. In case of conflict between English and Metric dimensions, the inch dimensions control.
2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
3. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication No. 95.
4. Dimensions A, A1 and L are measured with the package seated in JEDEC seating plane gauge GS-3.
5. D, D1, and E1 dimensions do not include mold flash or protrusions. Mold flash or protrusions shall not exceed 0.010 inch (0.25mm).
6. E and e_A are measured with the leads constrained to be perpendicular to datum $-C-$.
7. e_B and e_C are measured at the lead tips with the leads unconstrained. e_C must be zero or greater.
8. B1 maximum dimensions do not include dambar protrusions. Dambar protrusions shall not exceed 0.010 inch (0.25mm).
9. N is the maximum number of terminal positions.
10. Corner leads (1, N, N/2 and N/2 + 1) for E8.3, E16.3, E18.3, E28.3, E42.6 will have a B1 dimension of 0.030 - 0.045 inch (0.76 - 1.14mm).

E8.3 (JEDEC MS-001-BA ISSUE D)**8 LEAD DgUAL-IN-LINE PLASTIC PACKAGE**

| SYMBOL | INCHES | | MILLIMETERS | | NOTES |
|--------|-----------|-------|-------------|-------|-------|
| | MIN | MAX | MIN | MAX | |
| A | - | 0.210 | - | 5.33 | 4 |
| A1 | 0.015 | - | 0.39 | - | 4 |
| A2 | 0.115 | 0.195 | 2.93 | 4.95 | - |
| B | 0.014 | 0.022 | 0.356 | 0.558 | - |
| B1 | 0.045 | 0.070 | 1.15 | 1.77 | 8, 10 |
| C | 0.008 | 0.014 | 0.204 | 0.355 | - |
| D | 0.355 | 0.400 | 9.01 | 10.16 | 5 |
| D1 | 0.005 | - | 0.13 | - | 5 |
| E | 0.300 | 0.325 | 7.62 | 8.25 | 6 |
| E1 | 0.240 | 0.280 | 6.10 | 7.11 | 5 |
| e | 0.100 BSC | | 2.54 BSC | | - |
| e_A | 0.300 BSC | | 7.62 BSC | | 6 |
| e_B | - | 0.430 | - | 10.92 | 7 |
| L | 0.115 | 0.150 | 2.93 | 3.81 | 4 |
| N | 8 | | 8 | | 9 |

Rev. 0 12/93

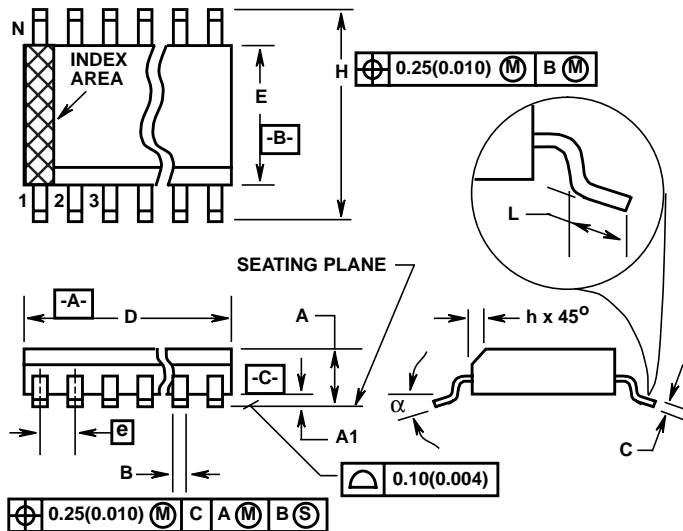Small Outline Plastic Packages (SOIC)**NOTES:**

1. Symbols are defined in the "MO Series Symbol List" in Section 2.2 of Publication Number 95.
2. Dimensioning and tolerancing per ANSI Y14.5M-1982.
3. Dimension "D" does not include mold flash, protrusions or gate burrs. Mold flash, protrusion and gate burrs shall not exceed 0.15mm (0.006 inch) per side.
4. Dimension "E" does not include interlead flash or protrusions. Interlead flash and protrusions shall not exceed 0.25mm (0.010 inch) per side.
5. The chamfer on the body is optional. If it is not present, a visual index feature must be located within the crosshatched area.
6. "L" is the length of terminal for soldering to a substrate.
7. "N" is the number of terminal positions.
8. Terminal numbers are shown for reference only.
9. The lead width "B", as measured 0.36mm (0.014 inch) or greater above the seating plane, shall not exceed a maximum value of 0.61mm (0.024 inch).
10. Controlling dimension: MILLIMETER. Converted inch dimensions are not necessarily exact.

M8.15 (JEDEC MS-012-AA ISSUE C)**8 LEAD NARROW BODY SMALL OUTLINE PLASTIC PACKAGE**

| SYMBOL | INCHES | | MILLIMETERS | | NOTES |
|--------|-----------|--------|-------------|------|-------|
| | MIN | MAX | MIN | MAX | |
| A | 0.0532 | 0.0688 | 1.35 | 1.75 | - |
| A1 | 0.0040 | 0.0098 | 0.10 | 0.25 | - |
| B | 0.013 | 0.020 | 0.33 | 0.51 | 9 |
| C | 0.0075 | 0.0098 | 0.19 | 0.25 | - |
| D | 0.1890 | 0.1968 | 4.80 | 5.00 | 3 |
| E | 0.1497 | 0.1574 | 3.80 | 4.00 | 4 |
| e | 0.050 BSC | | 1.27 BSC | | - |
| H | 0.2284 | 0.2440 | 5.80 | 6.20 | - |
| h | 0.0099 | 0.0196 | 0.25 | 0.50 | 5 |
| L | 0.016 | 0.050 | 0.40 | 1.27 | 6 |
| N | 8 | | 8 | | 7 |
| α | 0° | 8° | 0° | 8° | - |

Rev. 0 12/93

All Harris Semiconductor products are manufactured, assembled and tested under **ISO9000** quality systems certification.

Harris Semiconductor products are sold by description only. Harris Semiconductor reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Harris is believed to be accurate and reliable. However, no responsibility is assumed by Harris or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Harris or its subsidiaries.

Sales Office Headquarters

For general information regarding Harris Semiconductor and its products, call **1-800-4-HARRIS**

NORTH AMERICA

Harris Semiconductor
P. O. Box 883, Mail Stop 53-210
Melbourne, FL 32902
TEL: 1-800-442-7747
(407) 729-4984
FAX: (407) 729-5321

EUROPE

Harris Semiconductor
Mercure Center
100, Rue de la Fusee
1130 Brussels, Belgium
TEL: (32) 2.724.2111
FAX: (32) 2.724.22.05

ASIA

Harris Semiconductor PTE Ltd.
No. 1 Tannery Road
Cencon 1, #09-01
Singapore 1334
TEL: (65) 748-4200
FAX: (65) 748-0400

