

Shielded CHAMP Cable Connector Kits (Continued)



Inner Ferrule on Jacket

No. of Positions	Cable Diameter (Less Than)
24	.300 7.62
36	.350 8.89
50	.400 10.16

Inner Ferrule on Braid*

No. of Positions	Cable Diameter (Greater Than)
24	.300 7.62
36	.350 8.89
50	.400 10.16

* Ferrule size based on braid bundle diameter.

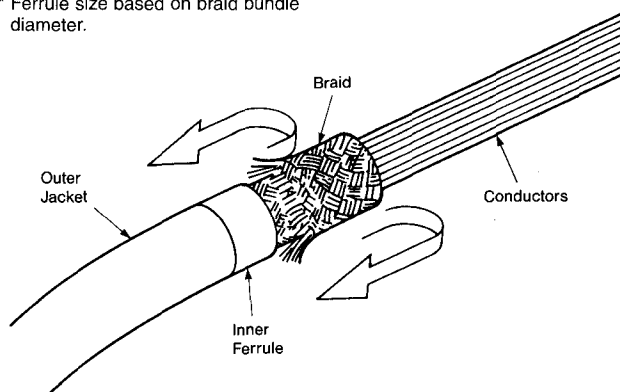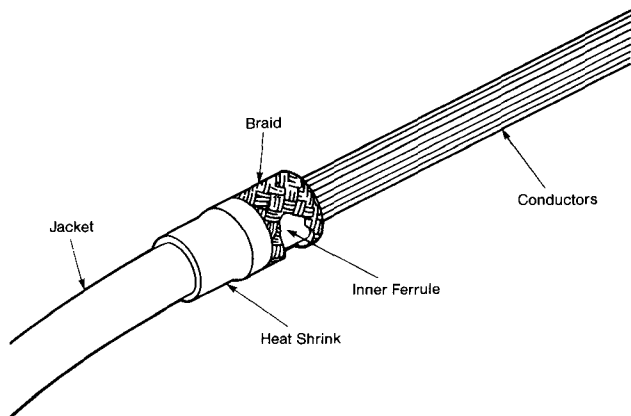

No. of Positions	Cable Range	Part Numbers							
		Shielded Plug Kit				Shielded Receptacle Kit			
		Screw Lock		Bail Lock		Screw or Bail Lock		Cover Kits	
		B Slot	E Slot	B Slot	E Slot	B Slot	E Slot		
24	.250-.500 6.35-12.70	554948-4 ⁵ 554948-2 ⁴	554948-3 ³	—	—	—	—	554944-1	
36	.250-.500 6.35-12.70	554951-2	—	554950-2	554950-1	—	—	554945-1	
50	.350-.625 8.89-15.88	554945-2 ⁶	554954-1	554953-2 ¹	554953-1 ¹	554955-2	554955-1	554946-1 ² 554946-2	

¹ SCSI applicable.

² For cable diameter of .500 [12.70] or less use -1 kit. For cable diameter greater than .500 [12.70] use -2 kit.

³ Connector with M3.5 threads kits includes M3.5 x 2.00 [50.80] standoff stud.

⁴ 4-40 UNC-2B hole size.

⁵ M3.5 x 0.6-6G, shoulder stud screws (2) supplied.

⁶ Contact Tyco Electronics for RoHS Part Number information.

**Typical Cable Assembly
(Shielding Effectiveness)**

