


TC9214AP, TC9214AF, TC9215AP, TC9215AF

High Voltage Analog Switch

TC9214AP/AF, TC9215AP/AF are analog switch for high voltage audio application.

Features

- Analog switch circuit formation
TC9214AP, TC9214AF: 5 circuits
TC9215AP, TC9215AF: 6 circuits
- Dual power supply of (+) and (–) can be used.
- Including level shift circuit, this IC can be operated by (+) power supply only under dual power supply operating.
- Setting low input-threshold-voltage in control signal input terminal. 5 V CPU application can control this IC directly.
- Package: DIP-16 pin
SOP-16 pin

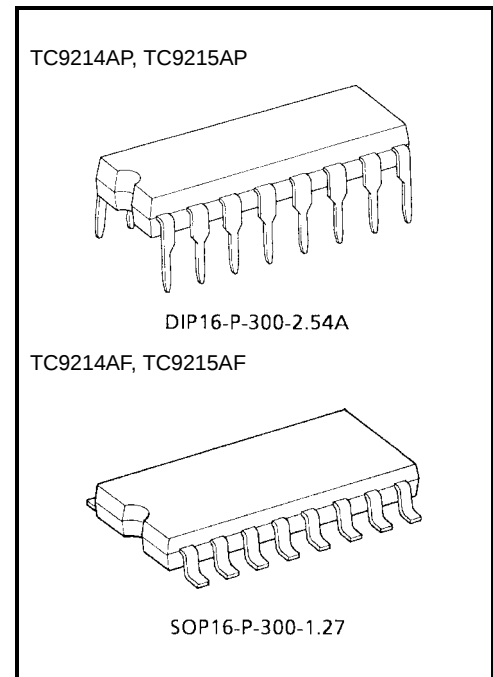


Weight

DIP16-P-300-2.54A: 1.0 g (typ.)


SOP16-P-300-1.27: 0.16 g (typ.)

Pin Assignment (top view)

TC9214AP, TC9214AF




TC9215AP, TC9215AF




Block Diagram

TC9214AP, TC9214AF

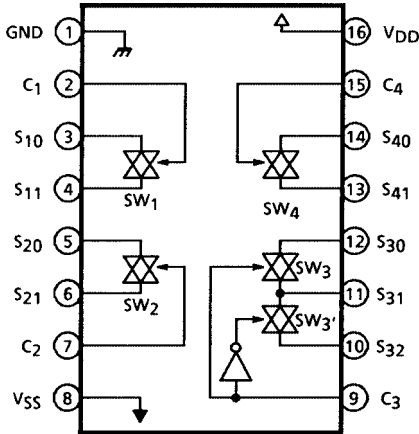


TC9215AP, TC9215AF

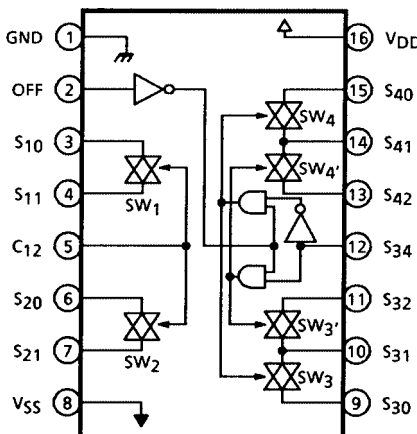


Pin Function

1. TC9214AP, TC9214AF

Pin No.	Symbol	Pin Name	Function	Note															
1	GND	Ground Terminal	Dual power supplying: +B → V _{DD} 0 V → GND -B → V _{SS} Single power supplying: +B → V _{DD} 0 V → GND, V _{SS}	—															
8	V _{SS}	(-) Power Supply Terminal																	
16	V _{DD}	(+) Power Supply Terminal																	
2	C ₁	Switch (1) Control Terminal	SWITCH CONNECTION  TRUTH TABLE <table border="1" data-bbox="687 1662 1070 1814"><thead><tr><th>C₁, C₂, C₄</th><th>SW₁, SW₂, SW₃</th></tr></thead><tbody><tr><td>H</td><td>ON</td></tr><tr><td>L</td><td>OFF</td></tr></tbody></table> <table border="1" data-bbox="687 1856 1147 2009"><thead><tr><th>C₃</th><th>S₃₀-S₃₁</th><th>S₃₁-S₃₂</th></tr></thead><tbody><tr><td>H</td><td>ON</td><td>OFF</td></tr><tr><td>L</td><td>OFF</td><td>ON</td></tr></tbody></table>	C ₁ , C ₂ , C ₄	SW ₁ , SW ₂ , SW ₃	H	ON	L	OFF	C ₃	S ₃₀ -S ₃₁	S ₃₁ -S ₃₂	H	ON	OFF	L	OFF	ON	—
C ₁ , C ₂ , C ₄	SW ₁ , SW ₂ , SW ₃																		
H	ON																		
L	OFF																		
C ₃	S ₃₀ -S ₃₁	S ₃₁ -S ₃₂																	
H	ON	OFF																	
L	OFF	ON																	
3	S ₁₀	Switch (1) Input/Output Terminal																	
4	S ₁₁																		
5	S ₂₀	Switch (2) Input/Output Terminal																	
6	S ₂₁																		
7	C ₂	Switch (2) Control Terminal																	
9	C ₃	Switch (3) Control Terminal																	
10	S ₃₂	Switch (3) Input/Output Terminal																	
11	S ₃₁																		
12	S ₃₀																		
13	S ₄₁	Switch (4) Input/Output Terminal																	
14	S ₄₀																		
15	C ₄	Switch (4) Control Terminal																	



2. TC9215AP, TC9215AF

Pin No.	Symbol	Pin Name	Function	Note																					
1	GND	Ground Terminal	Dual power supplying: +B → V _{DD} 0 V → GND -B → V _{SS} Single power supplying: +B → V _{DD} 0 V → GND, V _{SS}	—																					
8	V _{SS}	(-) Power Supply Terminal																							
16	V _{DD}	(+) Power Supply Terminal																							
2	OFF	Switch (3), (4) OFF Input Terminal	SWITCH CONNECTION  TRUTH TABLE <table><tr><th>C₁₂</th><th>SW₁, SW₂</th></tr><tr><td>H</td><td>ON</td></tr><tr><td>L</td><td>OFF</td></tr></table> <table><tr><th>OFF</th><th>C₃₄</th><th>S₃₀-S₃₁ S₄₀-S₄₁</th><th>S₃₁-S₃₂ S₄₁-S₄₂</th></tr><tr><td rowspan="2">L</td><td>L</td><td>ON</td><td>OFF</td></tr><tr><td>H</td><td>OFF</td><td>ON</td></tr><tr><td>H</td><td>(Note 1)</td><td>OFF</td><td>OFF</td></tr></table> Note 1: H or L	C ₁₂	SW ₁ , SW ₂	H	ON	L	OFF	OFF	C ₃₄	S ₃₀ -S ₃₁ S ₄₀ -S ₄₁	S ₃₁ -S ₃₂ S ₄₁ -S ₄₂	L	L	ON	OFF	H	OFF	ON	H	(Note 1)	OFF	OFF	—
C ₁₂	SW ₁ , SW ₂																								
H	ON																								
L	OFF																								
OFF	C ₃₄	S ₃₀ -S ₃₁ S ₄₀ -S ₄₁		S ₃₁ -S ₃₂ S ₄₁ -S ₄₂																					
L	L	ON		OFF																					
	H	OFF		ON																					
H	(Note 1)	OFF		OFF																					
3	S ₁₀	Switch (1) Input/Output Terminal																							
4	S ₁₁																								
5	C ₁₂	Switch (1), (2) Control Terminal																							
6	S ₂₀	Switch (2) Input/Output Terminal																							
7	S ₂₁																								
9	S ₃₀	Switch (3) Input/Output Terminal																							
10	S ₃₁																								
11	S ₃₂																								
12	C ₃₄	Switch (3), (4) Control Terminal																							
13	S ₄₂	Switch (4) Input/Output Terminal																							
14	S ₄₁																								
15	S ₄₀																								



Notation: Power Supply

As the power supply is parted between analog switch unit and control unit, the analog switch unit operates in dual power supply of (+) and (−), in which case, the control unit operates in single power supply. Setting a low input-threshold voltage in control input terminal, 5 V CPU application can control this IC directly.

Dual Power Supply Use

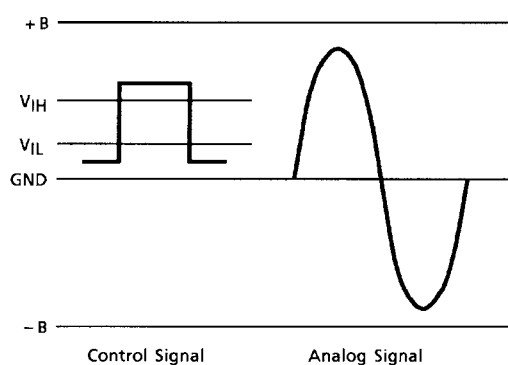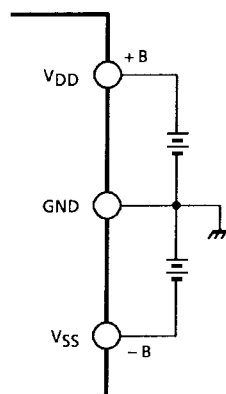

Single Power Supply Use

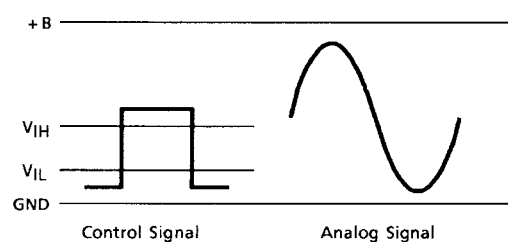

Note 2: In case of using single power supply in common with V_{SS} and GND terminal, half voltage of dual power supply must be supplied because of low operating voltage of a control circuit. ($V_{DD} - GND \leq 18\text{ V}$)

Maximum Ratings (Ta = 25°C)

Characteristics	Symbol	Rating	Unit
Power supply voltage (1)	V _{DD} -V _{SS}	-0.3~36	V
Power supply voltage (2)	V _{DD} -GND	-0.3~20	V
GND input voltage	V _{IN} (1)	-0.3~V _{DD} + 0.3	V
V _{SS} input voltage	V _{IN} (2)	V _{SS} - 0.3~V _{DD} + 0.3	V
Power dissipation	P _D	600 (300)	mW
Operating temperature	T _{opr}	-40~85	°C
Storage temperature	T _{stg}	-65~150	°C

(): SOP-16 pin.


Electrical Characteristics

(unless otherwise specified, V_{DD} = 15 V, V_{SS} = -15 V, GND = 0 V, Ta = 25°C)

Characteristics		Symbol	Test Circuit	Test Condition		Min	Typ.	Max	Unit
Operating supply voltage (1)		V _{DD} -V _{SS}	—	Dual power supplying		9.0	~	34	V
Operating supply voltage (2)		V _{DD} -GND		Single power supplying		4.5	~	18	V
Operating supply current		I _{DD}	—	No load, No signal		—	0.1	0.5	mA
Input voltage	“H” level	V _{IH}	—	Control input terminal		4.0	~	V _{DD}	V
	“L” level	V _{IL}		V _{DD} = 4.5~18 V		GND	~	1.0	
Input current	“H” level	I _{IH}	—	Control input terminal	V _{IH} = 15 V	-0.1	~	0.1	μA
	“L” level	I _{IL}			V _{IL} = 0 V	-0.1	~	0.1	
Analog switch ON resistance		R _{ON}	—	V _{DD} = 5.0 V, V _{SS} = -5.0 V		—	200	300	Ω
				V _{DD} = 9.0 V, V _{SS} = -9.0 V		—	80	100	
				V _{DD} = 15 V, V _{SS} = -15 V		—	60	80	
Analog switch OFF leak		I _{OFF}	—	V _{IN} = V _{DD} -V _{SS}		—	±0.1	±100	nA
Total harmonic distortion		THD	1	f _{IN} = 1 kHz, V _{IN} = 1 V _{rms} R _g = 600 Ω, R _L = 10 kΩ BW = 20 Hz~20 kHz		—	0.01	0.05	%
Cross talk		C _T				80	90	—	dB
Output noise voltage		V _N				—	2.0	—	μV _{rms}
Maximum control frequency		f _{max}		V _{IL} = 0 V, V _{IH} = 5 V		50	100	—	kHz
Maximum transfer frequency				R _L = 10 kΩ, C _L = 15 pF (Note 3)		—	5	—	MHz
Field through		F _S		R _L = 10 kΩ, C _L = 15 pF (Note 4)		—	300	—	kHz

Note 3: To supply the V_{IN} = 1.0 V_{rms} sign wave. f_{max} means 3dB down frequency from f_{IN} = 1 kHz.Note 4: To supply the V_{IN} = 1.0 V_{rms} sign wave. F_S means frequency for cross-talk 50dB.


Test Circuit 1

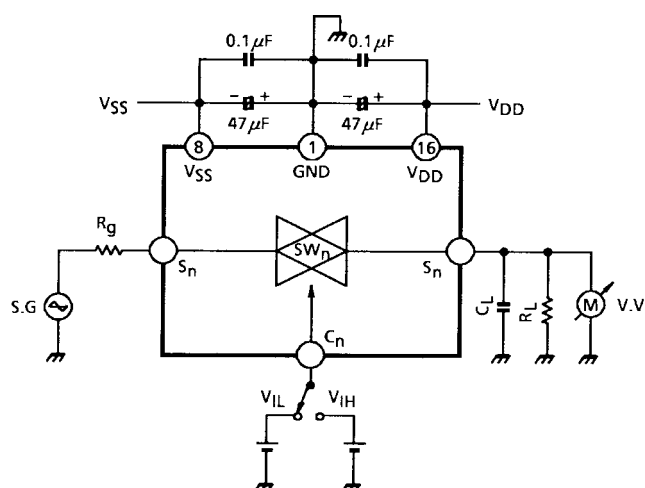

Application Circuit


1. TC9208N + TC9214AP, TC9214AF × 2

- Monitor switching for 6 source input circuits and 3 tape-recorder.

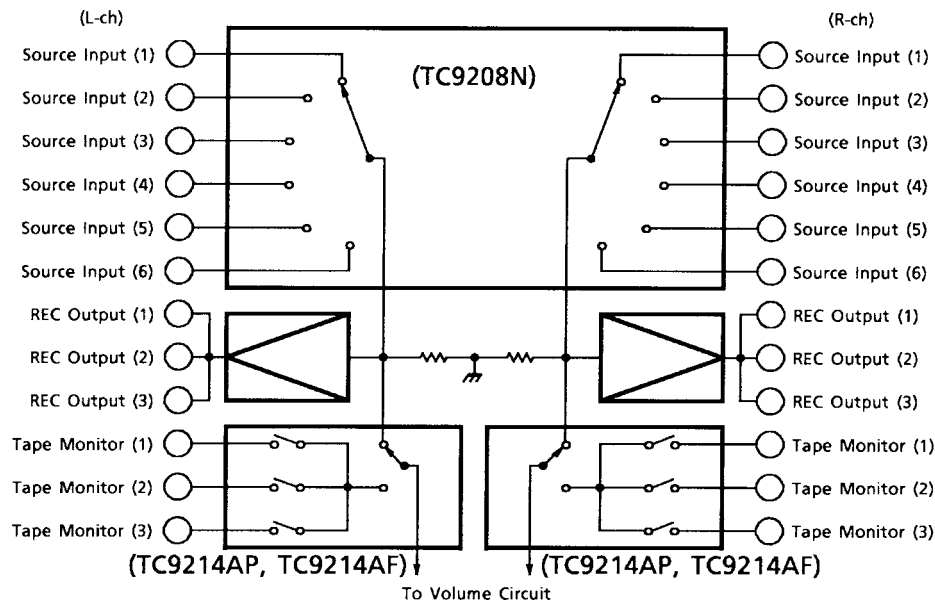

2. TC9208N + TC9215AP, TC9215AF


- Monitor switching for 6 source input circuits and 2 tape-recorder.

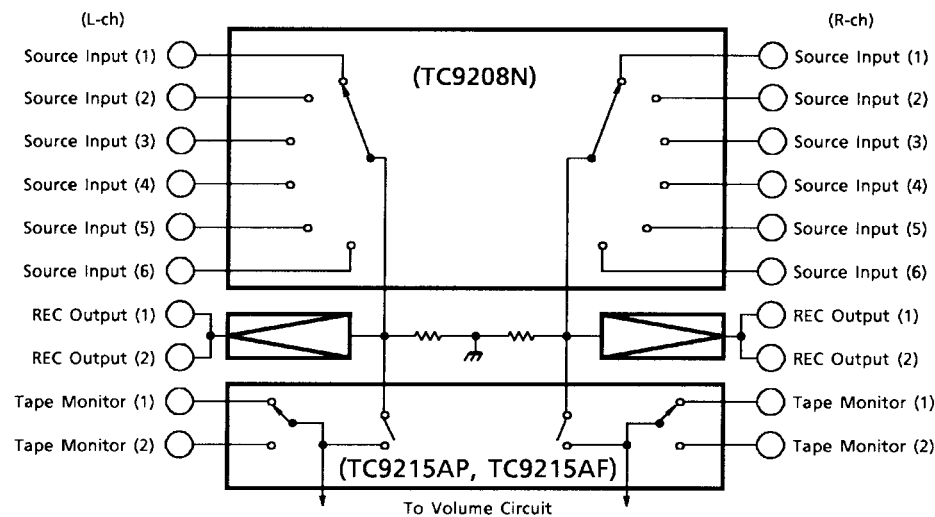

Package Dimensions

DIP16-P-300-2.54A

Unit : mm

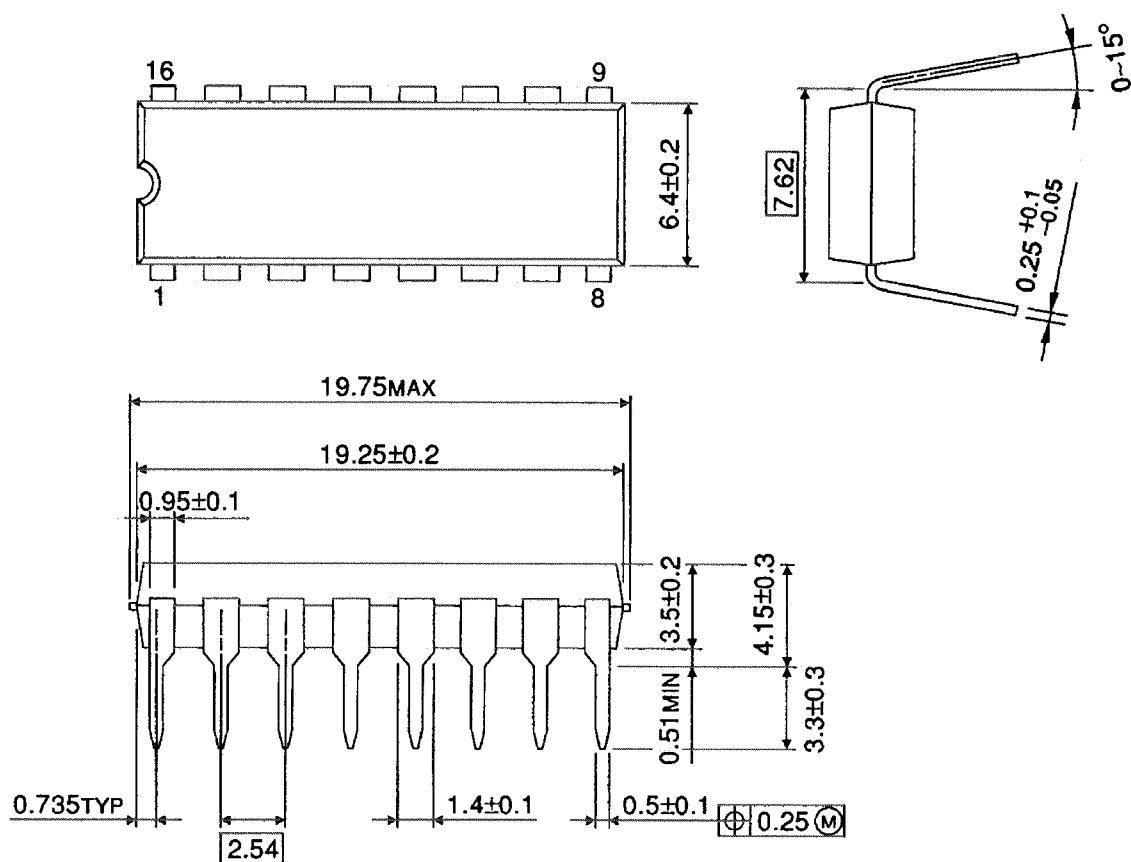


Weight: 1.0 g (typ.)

Package Dimensions

SOP16-P-300-1.27

Unit : mm

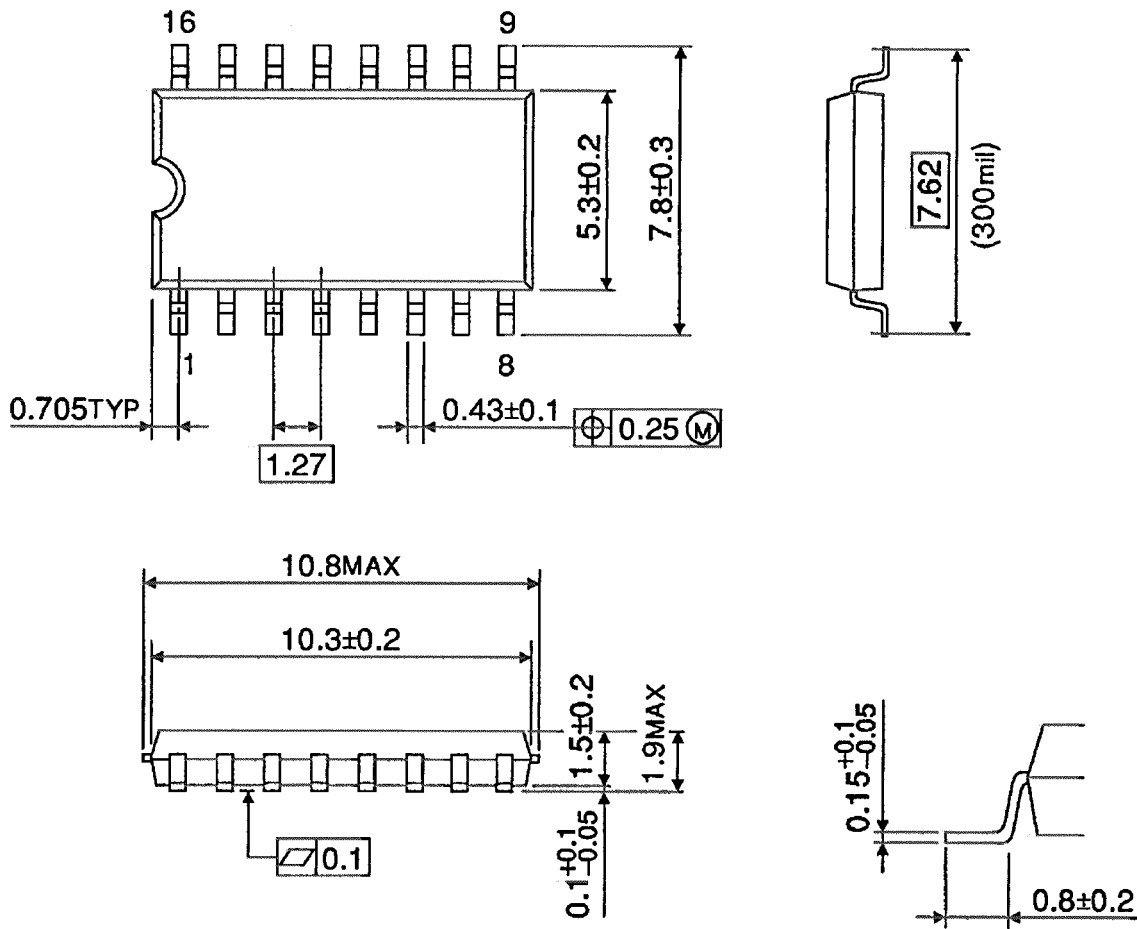

Weight: 0.16 g (typ.)

RESTRICTIONS ON PRODUCT USE

030619EBA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.