

# MTL5521 SOLENOID/ ALARM DRIVER

loop-powered, IIC

The MTL5521 is a loop-powered module which enables a device located in the hazardous area to be controlled from the safe area. The MTL5521 can drive a certified intrinsically safe low-power load, as well as non-energy-storing simple apparatus such as an LED.

## SPECIFICATION

See also common specification

### Number of channels


One

### Location of load

Zone 0, IIC, T4--6 hazardous area if suitably certified

Div. 1, Group A hazardous location

### Minimum output voltage      Equivalent output circuit

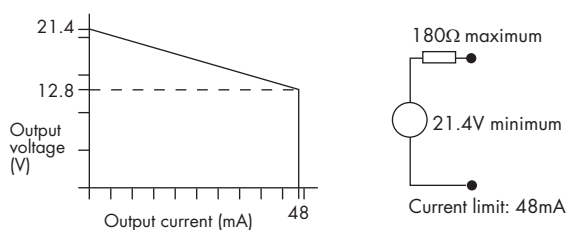

### Input voltage

20 to 35V dc

### Hazardous-area output

Minimum output voltage: 12.8V at 48mA

Maximum output voltage: 24V from 180Ω


Current limit: 48mA

### Output ripple

< 0.5% of maximum output, peak to peak

### Response time

Output within 10% of final value within 100ms

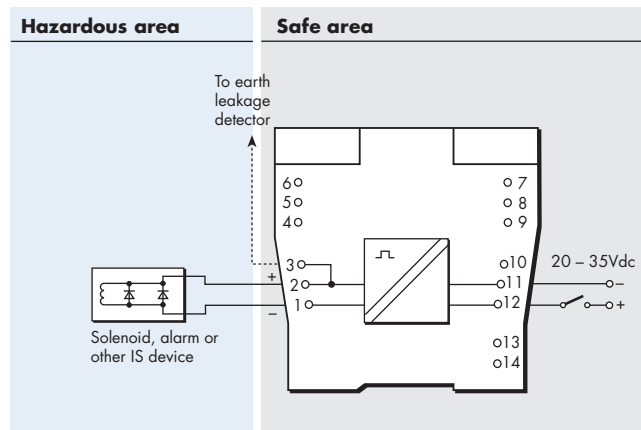

Terminal	Function
1	Output -ve
2	Output +ve
3	To earth leakage detector*
11	Supply -ve
12	Supply +ve

\* Signal plug HAZ1-3 is required for access to this function

### LED indicator

Yellow: output status, on when output circuit is active

### Maximum current consumption

90mA at 24V

### Power dissipation within unit

1.4W at 24V

### Safety description

$V_o = 25V$   $I_o = 147mA$   $P_o = 919mW$   $U_m = 253V$  rms or dc

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA)

AMERICAS

ASIA PACIFIC

E-mail: enquiry@mtl-inst.com

Tel: +44 (0)1582 723633

Tel: +1 281 571 8065

Tel: +65 6 487 7887

Web site: www.mtl-inst.com

Fax: +44 (0)1582 422283

Fax: +1 281 571 8069

Fax: +65 6 487 7997

Jan 2009

# MTL5500 SERIES COMMON SPECIFICATION

Please go to our website at [www.mtl-inst.com](http://www.mtl-inst.com) for the latest information regarding safety approvals, certificates and entity parameters.

## Connectors

Each MTL5500 unit is supplied with signal connectors, as applicable.

When using crimp ferrules for the hazardous and non-hazardous (safe) signal connectors the metal tube length should be 12mm and the wire trim length 14mm.

## Isolation

250V rms, tested at 2200V rms minimum, between safe-area, hazardous-area and power supply terminals

50V ac or dc between safe-area circuits where applicable.

## Supply voltage

20 – 35V dc

## Location of units

Safe area

## Terminals

Accepts conductors of up to 2.5mm<sup>2</sup> stranded or single-core

## Mounting

MTL5500 series backplanes

## Ambient temperature limits

–20 to +60°C (–6 to +140°F) operating

–40 to +80°C (–40 to +176°F) storage


## Humidity

5 to 95% relative humidity

## Weight

110g approximately (except where indicated)

## DIMENSIONS (mm)

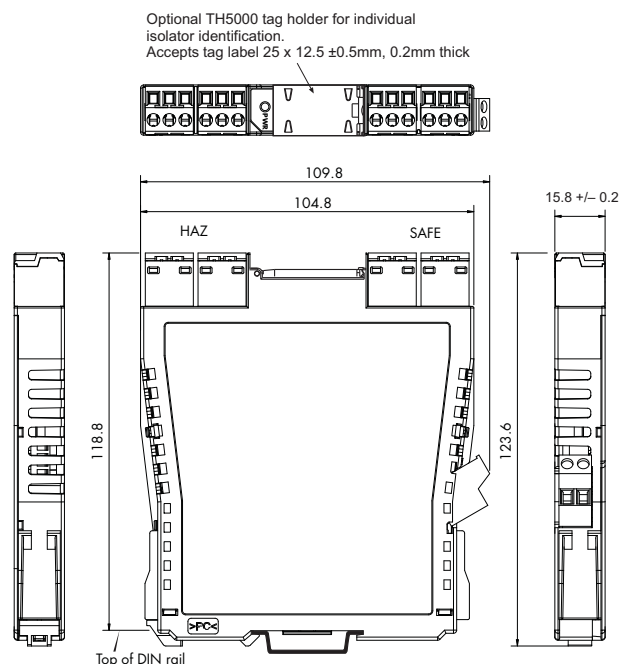

HART® is a registered trademark of HART Communication Foundation

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA)  
AMERICAS  
ASIA PACIFIC  
E-mail: [enquiry@mtl-inst.com](mailto:enquiry@mtl-inst.com) Web site: [www.mtl-inst.com](http://www.mtl-inst.com)

Tel: +44 (0)1582 723633  
Tel: +1 281 571 8065  
Tel: +65 6 487 7887

Fax: +44 (0)1582 422283  
Fax: +1 281 571 8069  
Fax: +65 6 487 7997