

DUAL 4-CHANNEL MULTIPLEXER

■ GENERAL DESCRIPTION


The NJU4052B is a dual 4-channel multiplexer with two binary control inputs and an inhibit input.

The two binary control input signals select 1 of 4 pairs of channels to be turned on and connect them to the two outputs.


The operating voltage is as wide as 3 to 18V and the quiescent current is as low as 5 μ A max. (at $V_{DD}=5V$).

It is equivalent to RCA CD4052B and Motorola MC14052B.


■ PACKAGE OUTLINE



NJU4052BD



NJU4052BM




NJU4052BV


■ FEATURES

- High ON/OFF Output Voltage Ratio --- 65dB Typ.
($R_L=10k\Omega$)
- Low Quiescent Current --- 5 μ A Typ. at $V_{DD}=5V$
- Low Crosstalk between channels --- 80dB Typ.
- Wide Operating Voltage Range. --- 3 ~ 18V
- Linearity in the transfer characteristics.
 $\Delta R_{ON} < 60\Omega$ ($V_{IN}=V_{DD} \sim V_{EE}$, $V_{DD}=15V$)
- Package Outline --- DIP/DMP 16
- C-MOS Technology


■ BLOCK DIAGRAM

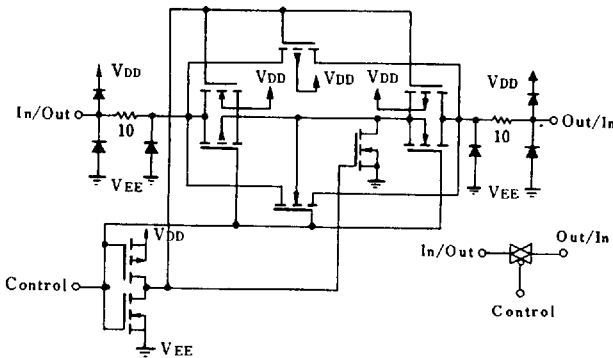

■ PIN CONFIGURATION



■ EQUIVALENT CIRCUIT

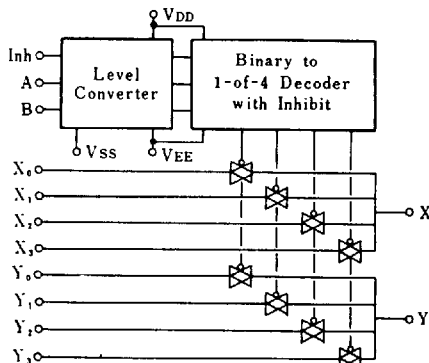

■ TRUTH TABLE

INH	B	A	On Switch	
0	0	0	Y_0	X_0
0	0	1	Y_1	X_1
0	1	0	Y_2	X_2
0	1	1	Y_3	X_3
1	x	x	None	

x: Don't Care

ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{DD} - V_{EE}$	- 0.5 ~ + 20	V
Input Voltage(Control Signal)	V_{IN}	$V_{SS}-0.5 \sim V_{DD}+0.5$	V
Input Voltage(Analog Signal)	V_{SIG}	$V_{EE}-0.5 \sim V_{DD}+0.5$	V
Input Current	I_{IN}	± 10	mA
Output Current	I_{OUT}	± 10	mA
Power Dissipation	P_D	500 (DIP) 200 (DMP) 300 (SSOP)	mW
Operating Temperature Range	T_{opr}	- 40 ~ + 85	°C
Storage Temperature Range	T_{stg}	- 65 ~ + 150	°C

ELECTRICAL CHARACTERISTICS

DC Characteristics

(V_{SS}=0V)

PARAMETER	SYMBOL	CONDITIONS	V _{DD} (V)	Ta=-40°C		Ta=25°C		Ta=85°C		UNIT
				MIN	MAX	MIN	TYP	MAX	MIN	MAX
Quiescent Current	I_{DD}	No signal Per Package	5 10 15 20	5 10 20 100		5 10 20 100			150 300 600 3000	μA
On-State Resistance	R_{ON}	$0 \leq V_{IS} \leq V_{DD}$ $V_{EE}=V_{SS}=0V$	5 10 15	500 210 140		220 100 60	600 250 160		800 300 200	Ω
On-State Resistance Deviation	ΔR_{ON}	Between 2 channels $V_{EE}=V_{SS}=0V$	5 10 15			15 10 5				Ω
Off-Channel Leakage Current		Each channel $V_{EE}=V_{SS}=0V$	18	±1000		±10	±100		±1000	nA
Input Capacitance	C_{IN}	$V_{IN}=0V$ Control Inhibit Switch				5.0 10	7.5			pF
Low Level Input Voltage	V_{IL}	$R_L=10k\Omega$ $SW=V_{DD}$ $V_{EE}=V_{SS}$	Vo=1.0V Vo=1.0V Vo=1.5V	5 10 15	1.5 3.0 4.0		1.5 3.0 4.0		1.5 3.0 4.0	V
High Level Input Voltage	V_{IH}		Vo=4.0V Vo=9.0V Vo=13.5V	5 10 15	3.5 7.0 11.0	3.5 7.0 11.0		3.5 7.0 11.0		V
Input Current	± I_{IN}		$V_{IN}=0$ or 18V	18	±0.1		±0.1		± 1	μA

■ SWITCHING CHARACTERISTICS


(Ta=25°C, C_L=50pF)

PARAMETER		SYMBOL	CONDITIONS	V _{DD} (V)	MIN	TYP	MAX	UNIT
Propagation Delay Time	SW Input to Output	t _{PLH}	R _L =10kΩ	5	15	45	ns	
				10	8	30		
				15	5	20		
		t _{PHL}		5	15	45		
	10			8	30			
	15			5	20			
	CONT Input to Output	t _{PHL}		5	450	1000	ns	
				10	200	500		
15			150	400				
t _{PZH}		5	450	1000				
	10	200	500					
	t _{PZL}	15	150	400				
Output Enable Time		t _{PHZ}	R _L =10kΩ	5	600	1400	ns	
		10		250	700			
		15		200	500			
Output Disable Time		t _{PLZ}	R _L =10kΩ	5	600	1400	ns	
		10		250	700			
		15		200	500			
Sine-Wave Distortion			R _L =10kΩ, f=1kHz, V _{IS} =5V _{P-P}	10	0.05		%	
Feedthrough (all-ch. off)			R _L =1kΩ, 20log ₁₀ V _{os} /V _{IS} =-50dB	10	4.5		MHz	
Crosstalk	SW A to B		R _L =1kΩ, V _{IS} =1/2(V _{DD} -V _{SS}) _{P-P}	10	3.0		MHz	
	Control-Out		R _I =1kΩ, R _L =10kΩ, tr=tf=20ns CONTROL/INHIBIT	10	30		mV	


7

■ MEASUREMENT CIRCUITS


1. Noise Margine



2. Propagation Delay

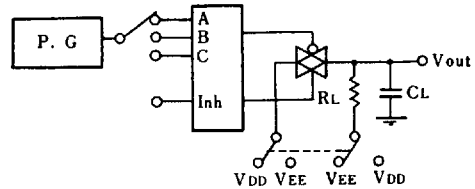


3. Feedthrough

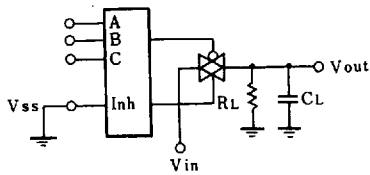

$$\frac{V_{DD} - V_{EE}}{2} \rightarrow$$

4. Crosstalk (Switch A and B)

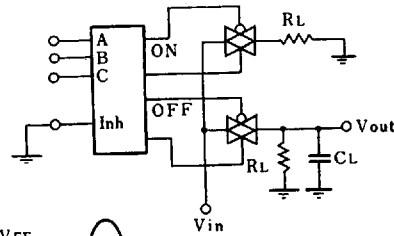

$$\frac{V_{DD} - V_{EE}}{2} \rightarrow$$

5. Crosstalk (Control and Out)

