


- State-of-the-Art BiCMOS Design
Significantly Reduces I_{CCZ}
- ESD Protection Exceeds 2000 V Per
MIL-STD-883C, Method 3015; Exceeds
200 V Using Machine Model ($C = 200 \text{ pF}$,
 $R = 0$)
- High-Impedance State During Power Up
and Power Down
- 3-State True Outputs Drive Bus Lines or
Buffer-Memory Address Registers
- P-N-P Inputs Reduce DC Loading
- Package Options Include Plastic
Small-Outline (D) Packages and Standard
Plastic 300-mil DIPs (P)

D OR P PACKAGE
(TOP VIEW)



description


This dual buffer and line driver is designed specifically to improve both the performance and density of 3-state memory address drivers, clock drivers, and bus-oriented receivers and transmitters.

The SN64BCT306 is characterized for operation from -40°C to 85°C and 0°C to 70°C .


FUNCTION TABLE
(each buffer)

INPUTS		OUTPUT
\overline{OE}	A	Y
H	X	Z
L	L	L
L	H	H

logic symbol†

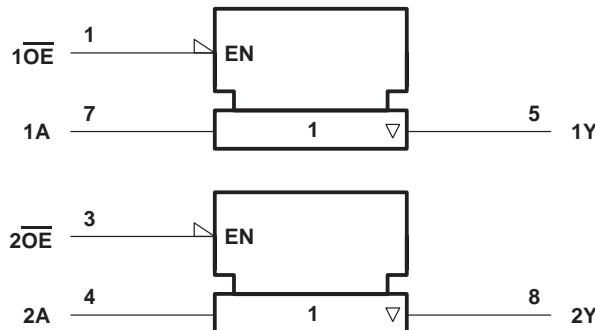

logic diagram (positive logic)

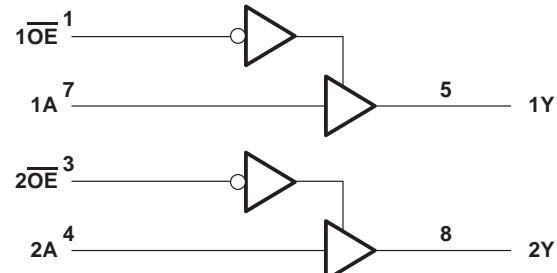

† This symbol is in accordance with ANSI/IEEE Std 91-1984
and IEC Publication 617-12.

SN64BCT306
DUAL BUFFER/DRIVER
WITH 3-STATE OUTPUTS

SCBS048B – MARCH 1990 – REVISED NOVEMBER 1993

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)[†]

Supply voltage range, V_{CC}	-0.5 V to 7 V
Input voltage range, V_I (see Note 1)	-0.5 V to 7 V
Voltage range applied to any output in the disabled or power-off state, V_O	-0.5 V to 5.5 V
Voltage range applied to any output in the high state, V_O	-0.5 V to V_{CC}
Input clamp current, I_{IK} ($V_I < 0$)	-30 mA
Current into any output in the low state, I_O	128 mA
Operating free-air temperature range	-40°C to 85°C
Storage temperature range	-65°C to 150°C

[†] Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: The input negative-voltage rating may be exceeded if the input clamp-current rating is observed.

recommended operating conditions (see Note 2)

		MIN	NOM	MAX	UNIT
V_{CC}	Supply voltage	4.5	5	5.5	V
V_{IH}	High-level input voltage		2		V
V_{IL}	Low-level input voltage			0.8	V
I_{IK}	Input clamp current			-18	mA
I_{OH}	High-level output current			-15	mA
I_{OL}	Low-level output current			64	mA
$\Delta t/\Delta V_{CC}$	Power-up ramp rate		2		μs/V
T_A	Operating free-air temperature	-40		85	°C

NOTE 2: Unused or floating inputs must be held high or low.

electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS		MIN	TYP [‡]	MAX	UNIT
V_{IK}	$V_{CC} = 4.5$ V,	$I_I = -18$ mA			-1.2	V
V_{OH}	$V_{CC} = 4.5$ V	$I_{OH} = -3$ mA	2.4	3.3		V
		$I_{OH} = -15$ mA	2	3.1		
V_{OL}	$V_{CC} = 4.5$ V,	$I_{OL} = 64$ mA		0.42	0.55	V
I_I	$V_{CC} = 5.5$ V,	$V_I = 7$ V			0.1	mA
I_{IH}	$V_{CC} = 5.5$ V,	$V_I = 2.7$ V			20	μA
I_{IL}	$V_{CC} = 5.5$ V,	$V_I = 0.5$ V			-1	mA
I_{OZ}	$V_{CC} = 0$ to 2.3 V (power up)	$V_O = 2.7$ V or 0.5 V, $\overline{OE} = 0.8$ V		± 50		μA
	$V_{CC} = 1.8$ to 0 V (power down)			± 50		
I_{OZH}	$V_{CC} = 5.5$ V,	$V_O = 2.7$ V			50	μA
I_{OZL}	$V_{CC} = 5.5$ V,	$V_O = 0.5$ V			-50	μA
$I_{OS}^§$	$V_{CC} = 5.5$ V,	$V_O = 0$	-100		-225	mA
I_{CCL}	$V_{CC} = 5.5$ V,	Outputs open		53	80	mA
I_{CCH}	$V_{CC} = 5.5$ V,	Outputs open		23	40	mA
I_{CCZ}	$V_{CC} = 5.5$ V,	Outputs open		4	10	mA

[‡] All typical values are at $V_{CC} = 5$ V, $T_A = 25$ °C.

[§] Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

SN64BCT306
DUAL BUFFER/DRIVER
WITH 3-STATE OUTPUTS

SCBS048B – MARCH 1990 – REVISED NOVEMBER 1993

switching characteristics over recommended range of supply voltage, $C_L = 50 \text{ pF}$ (unless otherwise noted) (see Note 3)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 5 \text{ V}$, $T_A = 25^\circ\text{C}$		$T_A = -40^\circ\text{C}$ to 85°C		$T_A = 0^\circ\text{C}$ to 70°C	
			MIN	MAX	MIN	MAX	MIN	MAX
t_{PLH}	A	Y	1.2	4.4	0.9	5.3	0.7	5
t_{PHL}			1.7	5	1.4	6	1.4	5.5
t_{PZH}	$1\overline{OE}$ or $2\overline{OE}$	Y	2	7.8	2	9	2	8.7
t_{PZL}			2	8.1	2	9.4	2	8.9
t_{PHZ}	$1\overline{OE}$ or $2\overline{OE}$	Y	2	6.7	2	8	2	7.7
t_{PLZ}			2	7.6	2	9.8	2	8.9

NOTE 3: Load circuits and voltage waveforms are shown in Section 1.

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.