

CLB-Series

THERMAL CIRCUIT PROTECTORS

Rating:

3 to 60A, 125-250VAC, 32VDC

Approvals:

UL, CUL, CSA, TUV, CE

UL1500/ISO8846 for ignition protection/marine

Dielectric Strength:

2500 VAC/1 minute

Interrupting capacity:

2500 amps @ 32 VDC

Insulation Resistance:

100M ohms

Operating Temperature:

-10°C to 60°C

Voltage drop:

< 0.25 V

Applications:

Household Appliances

Transportation

Marine

Power Strips

Medical Equipment

Audio Visual Equipment


Power Supplies

ROHS Compliant


A COMPACT, SINGLE POLE, PUSH-TO-RESET
FAMILY OF THERMAL CIRCUIT BREAKERS

Dimensional Specifications:

3-40A Construction

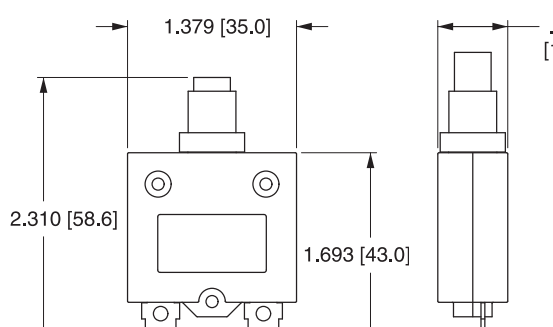

50 & 60A Construction

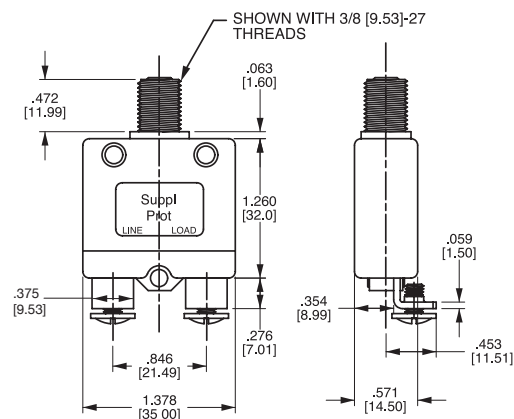

Carling Technologies™

Innovative Designs. Powerful Solutions.

Carling Technologies, Inc.

60 Johnson Avenue, Plainville, CT 06062

Email: sales@carlingtech.com

Application Support: team2@carlingtech.com

Phone: 860.793.9281 Fax: 860.793.9231

www.carlingtech.com

CLB - 10 3 - 12 C 3 N - B - A / 10

1 Series 2 Rating 3 Voltage 4 Mounting Hole 5 Bushing Type 6 Mounting Nut 7 Indicator Plate 8 Button 9 Terminal 10 Button Marking

1 SERIES CLB


3 VOLTAGE 3 125-250VAC/ 32 VDC

2 RATING

03	3 amp	15	15 amp
04	4 amp	18	18 amp
05	5 amp	20	20 amp
06	6 amp	25	25 amp
07	7 amp	30	30 amp
08	8 amp	35	35 amp
10	10 amp	40	40 amp
12	12 amp	50 ¹²	50 amp
13	13 amp	60 ¹²	60 amp

4 MOUNTING HOLE

11 ¹	M11
12 ²	M12
00 ³	Snap In Style
27 ⁴	3/8" 27 UNS

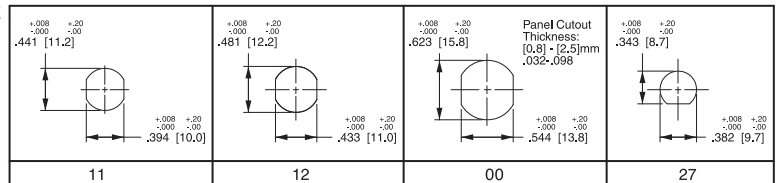


5 BUSHING

METAL

A ⁵	Type A
B ⁶	Type B
J ⁸	Type J


PLASTIC

C ⁵	Type C
D ⁷	Type D
E ⁸	Type E

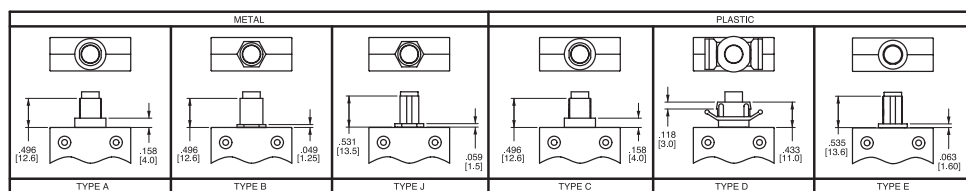

6 MOUNTING NUT⁹

N	None
1	Type 1
2	Type 2
3	Type 3
4	Type 4
5	Type 5
6 ^{4,14}	Type 6
7 ⁴	Type 7
8 ⁴	Type 8

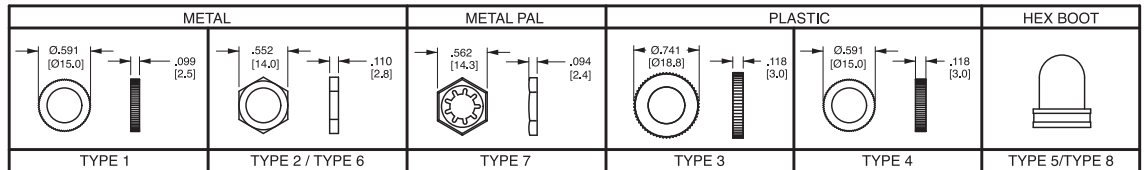


NOTE: Type 5 is clear hex boot. Type 8 is black hex boot (available for bushings E & J only); Type 3 nut includes molded in "PRESS TO RESET" marking.

7 INDICATOR PLATE⁹

N	None
A	Embossed
B	Silver Printing on Black

All indicator plates are marked "Suppl. Prot. press to reset".



Notes: All dimensions are in [mm]. Tolerance ± 0.05 [1.27] unless otherwise specified.


- Used with bushing A or B only.
- Used with bushing C only.
- Used with bushing D only.
- Used with bushing E & J only.
- Used with M12 mounting hole only.
- Used with M12 mounting hole only.
- Used with mounting hole 00 only.
- Used with 27 mounting hole only.
- All hardware available separately. Consult factory.
- > 35 amp ratings must use solder joint to connect wire to non-screw type terminals.
- Terminals are .040 [1.0] thickness for ratings > 35, & .315 [8] thickness is for ratings < 35 amps.
- Available only with 10-24 unc. screw terms. (select type F, G, H, J only.) UL, CUL only.
- Amp rating must match button marking (ex: "20" will be marked on the button of the breaker)
- Thickness is 3.0 mm, .118 in.
- Screw terminals are 8-32 UNC

8 BUTTON

B	Black	R	Red	W	White
---	-------	---	-----	---	-------

9 TERMINAL^{10,11,15}


A	Type A	F	Type F
B	Type B	G	Type G
C	Type C	H	Type H
D	Type D	J	Type J
E	Type E		

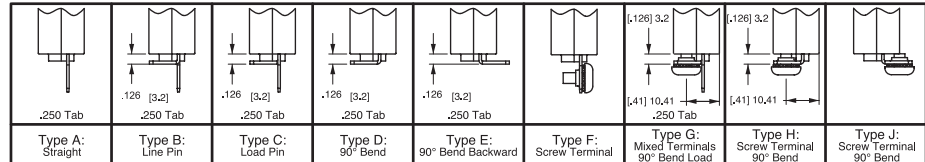

10 BUTTON MARKING (IF BLANK, NO MARKING.)¹³ Button Marking Orientation: line (20) load

03	3 amp	06	6 amp	10	10 amp	15	15 amp	25	25 amp	40	40 amp
04	4 amp	07	7 amp	12	12 amp	18	18 amp	30	30 amp	50	50 amp
05	5 amp	08	8 amp	13	13 amp	20	20 amp	35	35 amp	60	60 amp

Time Delay

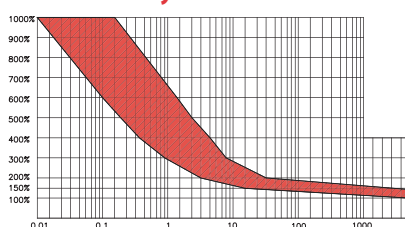

DERATING FACTOR	
-10°C	X1.70
-5°C	X1.60
0°C	X1.50
5°C	X1.40
10°C	X1.30
15°C	X1.20
20°C	X1.10
25°C	X1.00

DERATING FACTOR	
30°C	X0.90
35°C	X0.85
40°C	X0.80
45°C	X0.75
50°C	X0.70
55°C	X0.65
60°C	X0.60

OVERLOAD TRIP TIME	
100 %	NO TRIP
150 %	TRIP IN 1 HR
200 %	4.0~40 sec
300 %	0.9~8.0 sec
400 %	0.42~5.0 sec
500 %	0.25~3.0 sec
600 %	0.1~1.8 sec

Notes:

Breaker must hold 100% of rated current and must trip at 150% and above, within the time limits shown in curve. Trip times specified at 25° ambient with no preloading.

To adjust the breaker rating for ambient temperature multiply the breaker rating by the factor. (ex: 5 amp rating at 0°C: 5 x .67 = 3.3 amp. Select 3 amp rating.)

*Manufacturer reserves the right to change product specification without prior notice.

CB_CLB_03_2015

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Carling Technologies:

[CLB-043-11B3A-B-A](#) [CLB-053-11B3A-B-A](#) [CLB-203-11B3A-B-A](#) [CLB-133-11B3A-B-A](#) [CLB-063-11B3A-B-A](#) [CLB-103-11B3A-B-A](#) [CLB-153-11B3A-B-A](#) [CLB-253-11B3A-B-A](#) [CLB-353-11B3A-B-A](#) [CLB-073-11B3A-B-A](#) [CLB-033-11B3A-B-A](#) [CLB-303-11B3A-B-A](#) [CLB-403-11B3A-B-A](#) [CLB-123-11B3A-B-A](#) [CLB-253-00DNN-W-F/25](#) [CLB-303-11A3N-BA](#) [CLB-103-12C3N-B-H](#) [CLB-053-11A3N-B-A](#) [CLB-073-11A3N-B-A](#) [CLB-103-11A3N-B-A](#) [CLB-153-11A3N-B-A](#) [CLB-203-11A3N-B-A](#) [CLB-253-11A3N-B-A](#) [CLB-033-11A2B-B-A](#) [CLB-203-12C2N-W-A/20](#)