

LM1558/LM1458 Dual Operational Amplifier

General Description


The LM1558 and the LM1458 are general purpose dual operational amplifiers. The two amplifiers share a common bias network and power supply leads. Otherwise, their operation is completely independent.

The LM1458 is identical to the LM1558 except that the LM1458 has its specifications guaranteed over the temperature range from 0°C to +70°C instead of -55°C to +125°C.

Features

- No frequency compensation required
- Short-circuit protection
- Wide common-mode and differential voltage ranges
- Low-power consumption
- 8-lead can and 8-lead mini DIP
- No latch up when input common mode range is exceeded


Schematic and Connection Diagrams

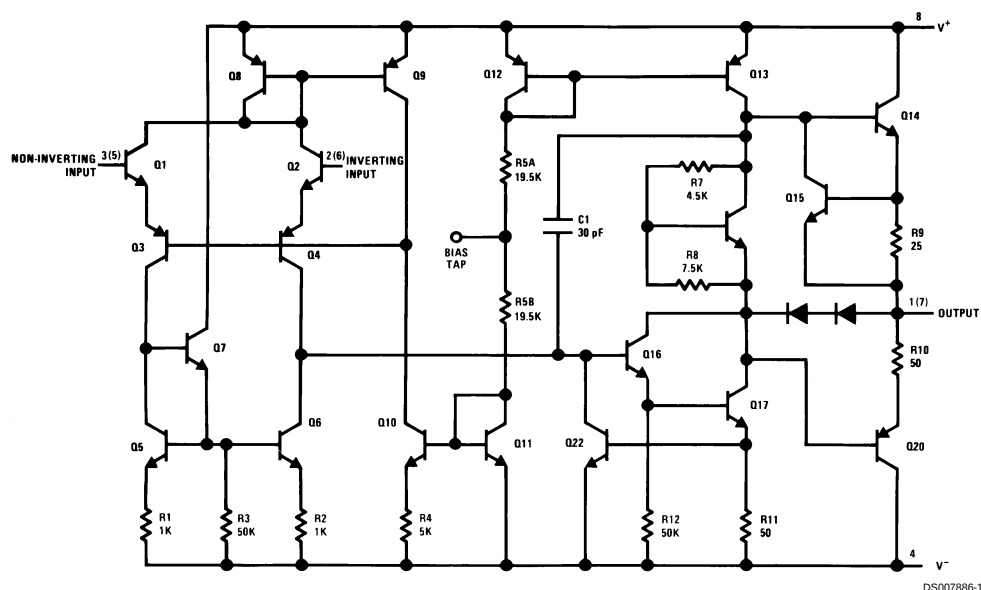

Numbers in parentheses are pin numbers for amplifier B.

Schematic and Connection Diagrams (Continued)


Metal Can Package



DS007886-2

Top View
Order Number LM1558H,
LM1558H/883 or LM1458H
See NS Package Number H08C

Dual-In-Line Package

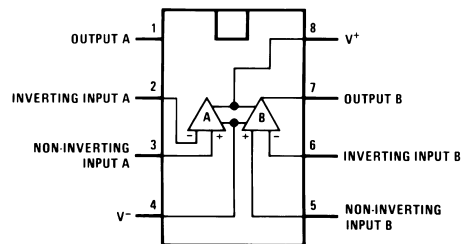

DS007886-3

Top View
Order Number LM1558J, LM1558J/883, LM1458J,
LM1458M or LM1458N
See NS Package Number J08A, M08A or N08E

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/ Distributors for availability and specifications.

(Note 5)

Supply Voltage

LM1558 $\pm 22V$

LM1458 $\pm 18V$

Power Dissipation (Note 2)

LM1558H/LM1458H 500 mW

LM1458N 400 mW

Differential Input Voltage

$\pm 30V$

Input Voltage (Note 3)

$\pm 15V$

Output Short-Circuit Duration

Continuous

Operating Temperature Range

LM1558

$-55^{\circ}C$ to $+125^{\circ}C$

LM1458

$0^{\circ}C$ to $+70^{\circ}C$

Storage Temperature Range

$-65^{\circ}C$ to $+150^{\circ}C$

Lead Temperature (Soldering, 10 sec.)

$260^{\circ}C$

Soldering Information

Dual-In-Line Package

Soldering (10 seconds)

$260^{\circ}C$

Small Outline Package

Vapor Phase (60 seconds)

$215^{\circ}C$

Infrared (15 seconds)

$220^{\circ}C$

See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.

ESD tolerance (Note 6)

300V

Electrical Characteristics (Note 4)

Parameter	Conditions	LM1558			LM1458			Units
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage	$T_A = 25^{\circ}C$, $R_S \leq 10\text{ k}\Omega$		1.0	5.0		1.0	6.0	mV
Input Offset Current	$T_A = 25^{\circ}C$		80	200		80	200	nA
Input Bias Current	$T_A = 25^{\circ}C$		200	500		200	500	nA
Input Resistance	$T_A = 25^{\circ}C$	0.3	1.0		0.3	1.0		M Ω
Supply Current Both Amplifiers	$T_A = 25^{\circ}C$, $V_S = \pm 15V$		3.0	5.0		3.0	5.6	mA
Large Signal Voltage Gain	$T_A = 25^{\circ}C$, $V_S = \pm 15V$ $V_{OUT} = \pm 10V$, $R_L \geq 2\text{ k}\Omega$	50	160		20	160		V/mV
Input Offset Voltage	$R_S \leq 10\text{ k}\Omega$			6.0			7.5	mV
Input Offset Current				500			300	nA
Input Bias Current				1.5			0.8	μA
Large Signal Voltage Gain	$V_S = \pm 15V$, $V_{OUT} = \pm 10V$ $R_L \geq \text{k}\Omega$	25			15			V/mV
Output Voltage Swing	$V_S = \pm 15V$, $R_L = 10\text{ k}\Omega$ $R_L = 2\text{ k}\Omega$	± 12	± 14		± 12	± 14		V
		± 10	± 13		± 10	± 13		V
Input Voltage Range	$V_S = \pm 15V$	± 12			± 12			V
Common Mode Rejection Ratio	$R_S \leq 10\text{ k}\Omega$	70	90		70	90		dB
Supply Voltage Rejection Ratio	$R_S \leq 10\text{ k}\Omega$	77	96		77	96		dB

Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits.

Note 2: The maximum junction temperature of the LM1558 is $150^{\circ}C$, while that of the LM1458 is $100^{\circ}C$. For operating at elevated temperatures, devices in the H08 package must be derated based on a thermal resistance of $150^{\circ}C/W$, junction to ambient or $20^{\circ}C/W$, junction to case. For the DIP the device must be derated based on a thermal resistance of $187^{\circ}C/W$, junction to ambient.


Note 3: For supply voltages less than $\pm 15V$, the absolute maximum input voltage is equal to the supply voltage.

Note 4: These specifications apply for $V_S = \pm 15V$ and $-55^{\circ}C \leq T_A \leq 125^{\circ}C$, unless otherwise specified. With the LM1458, however, all specifications are limited to $0^{\circ}C \leq T_A \leq 70^{\circ}C$ and $V_S = \pm 15V$.

Note 5: Refer to RETS 1558V for LM1558J and LM1558H military specifications.


Note 6: Human body model, $1.5\text{ k}\Omega$ in series with 100 pF .

Physical Dimensions inches (millimeters) unless otherwise noted

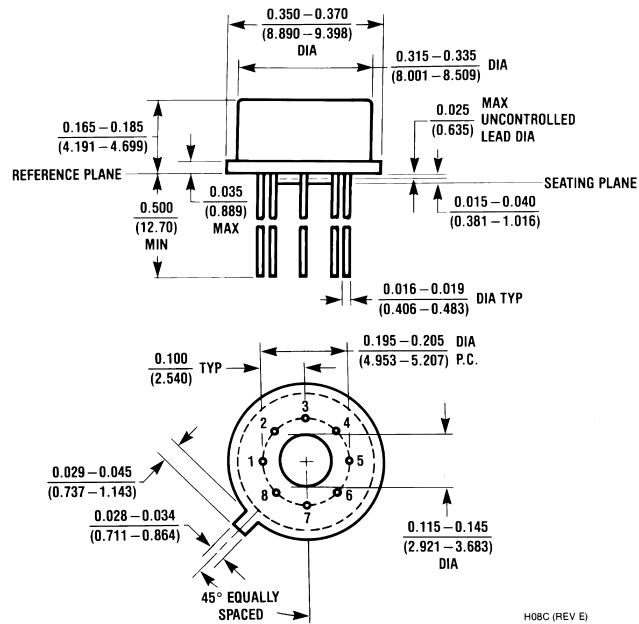


H08C (REV E)

Metal Can Package (H)
 Order Number LM1558H, LM1558H/883 or LM1458H
 NS Package Number H08C

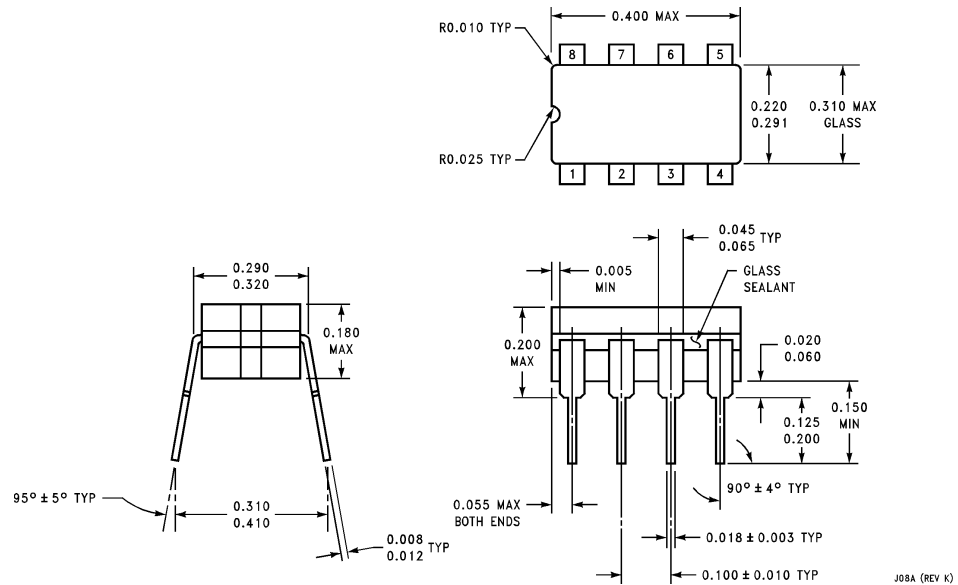


J08A (REV K)

Small Outline Package (M)
 Order Number LM1458M
 NS Package Number M08A

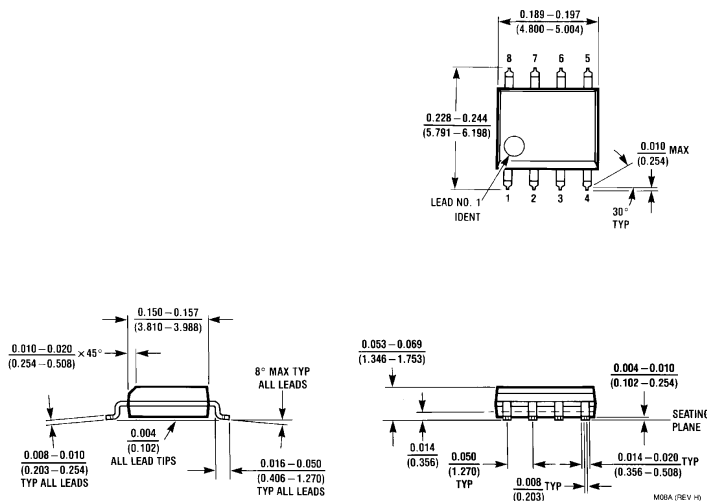Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

Small Outline Package (M)
Order Number LM1458M
NS Package Number M08A

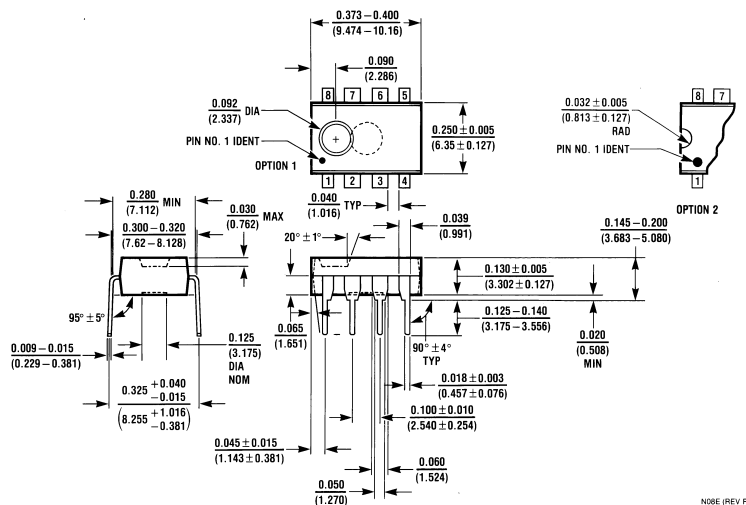

Molded Dual-In-Line Package (N)
Order Number LM1458N
NS Package Number N08E

Notes

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com

www.national.com

National Semiconductor Europe

Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 1 80-530 85 85
English Tel: +49 (0) 1 80-532 78 32
Français Tel: +49 (0) 1 80-532 93 58
Italiano Tel: +49 (0) 1 80-534 16 80

National Semiconductor Asia Pacific Customer Response Group

Tel: 65-2544466
Fax: 65-2504466
Email: sea.support@nsc.com

National Semiconductor Japan Ltd.

Tel: 81-3-5639-7560
Fax: 81-3-5639-7507