



**NEW**  
Transparent &  
Class 1 Laser  
Models



|||||

# SA1E Sensors



## Highlights:

- Fully automated assembly
- High-speed response
- Subminiature design
- Cable and M8 Quick connector models available
- IP67 rated

## Available Sensing Modes:

|                                                         |      |
|---------------------------------------------------------|------|
| <b>Through-beam (Class 1 Laser)</b> .....               | Pg 3 |
| <b>Polarized retro-reflective (Class 1 Laser)</b> ..... | Pg 4 |
| <b>Background suppression (Class 1 Laser)</b> .....     | Pg 5 |
| <b>Convergent</b> .....                                 | Pg 6 |
| <b>Diffuse</b> .....                                    | Pg 7 |
| <b>Small-beam reflective</b> .....                      | Pg 8 |
| <b>Transparent</b> .....                                | Pg 9 |

## Photoelectric sensors

Photoelectric sensors send a beam of light to detect the presence of target objects, generally utilizing an emitter and receiver for this function. Photoelectric technology is ideal for industries such as material handling, packaging, electronics and semiconductor manufacturing, food and beverage, and pharmaceutical.


## IDEC SA1E photoelectric sensors

Accurate detection of target objects is imperative for control systems. With reliable object detection and repeatability, you can have fewer false alarms and less product rejection. Designed to function consistently over time and tolerate harsh industrial environments, the IDEC SA1E photoelectric sensors are completely assembled using precise robotic technology to produce a reliable, accurate and durable product. No matter how demanding your application is, there's an SA1E photoelectric sensor with the features to suit your requirements and a low price to fit your budget!

SA1E photoelectric sensors come in an easy-to-install, compact housing with a choice of NPN or PNP outputs, as well as a choice of operation modes. In Light ON mode, the output is energized when the sensor detects light. In Dark ON mode, the output is energized when the sensor detects dark (the absence of light).



# Through-beam




www.IDEC.com/sensor

## Benefits of through-beam sensors:

- Suitable for dirty environments
- Offers precise detection
- Detects target objects up to 30 meters away (laser models)

IDEC SA1E through-beam photoelectric sensors are configured with the emitter and detector placed facing each other, perpendicular to the path of the target object. Light is sent from the emitter to the receiver, and the target object is detected when the beam is broken.


## Through-beam

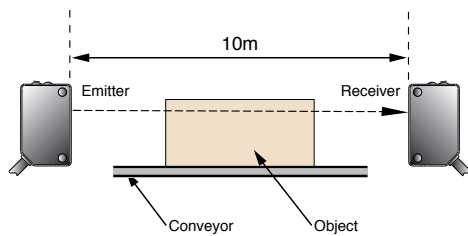


| Sensing Method             | Sensing Range | Connection   | Cable Length                   | Operation Mode   | Part Number  |              |
|----------------------------|---------------|--------------|--------------------------------|------------------|--------------|--------------|
|                            |               |              |                                |                  | NPN Output   | PNP Output   |
| Through-Beam Infrared LED  | 20m*          | Cable        | 2m                             | Light ON         | SA1E-TN1-2M  | SA1E-TP1-2M  |
|                            |               |              |                                | Dark ON          | SA1E-TN2-2M  | SA1E-TP2-2M  |
|                            |               | M8 Connector | 2m or 5m<br>(Order Separately) | Light ON         | SA1E-TN1C    | SA1E-TP1C    |
|                            |               |              |                                | Dark ON          | SA1E-TN2C    | SA1E-TP2C    |
| Through-Beam Class 1 Laser | 30m           | Cable        | 2m                             | Light ON/Dark ON | SA1E-LTN3-2M | SA1E-LTP3-2M |
|                            |               | M8 Connector | —                              | Light ON/Dark ON | SA1E-LTN3C   | SA1E-LTP3C   |

\*Without Sensitivity Adjustment: 1. SA1E-TN2-NA-2M, 2. SA1E-TP2-NA-2M (15 meter range)


Excess Gain (without slit)




Excess Gain (with round slit)

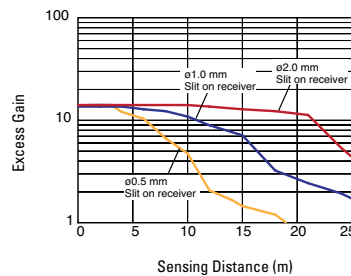


Lateral Displacement (without slit)

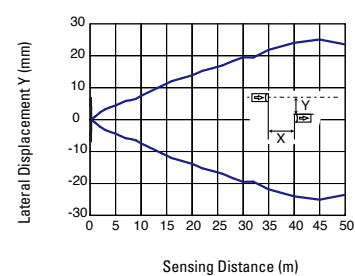

Angle (without slit)




Light Beam Diameter\*\*



800.262.4332

\*\*Sensing distance below 3 m: Defined as  $1/e^2$  (13.5%) of the center intensity  
Sensing distance over 3 m: Reference value (visual inspection)

# Polarized retro-reflective




## Benefits of polarized retro-reflective sensors:

- Emitter and detector in one unit
- Polarized beam detects matte and mirrored objects
- Detects reflective objects

IDEC SA1E polarized retro-reflective sensors are configured with the emitter and detector housed in one unit. Light is sent from the sensor's emitter to a reflector, which then reflects the light back to the sensor's receiver. The biggest advantage of using this type of sensor is that wiring is very easy due to the fact you only have one unit to wire. These sensors are also ideal for detecting mirror-like objects.







## Polarized retro-reflective

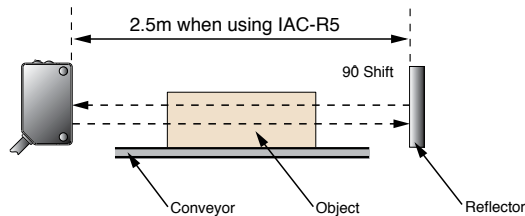

| Sensing Method                                                         | Sensing Range                                                              | Connection   | Cable Length                   | Operation Mode   | Part Number              |                          |
|------------------------------------------------------------------------|----------------------------------------------------------------------------|--------------|--------------------------------|------------------|--------------------------|--------------------------|
|                                                                        |                                                                            |              |                                |                  | NPN Output               | PNP Output               |
| Polarized Retro-reflective<br>Red LED                                  | 5m when using IAC-R5                                                       | Cable        | 2m                             | Light ON         | SA1E-PN1-2M              | SA1E-PP1-2M              |
|                                                                        | 5m when using IAC-R8                                                       |              |                                | Dark ON          | SA1E-PN2-2M <sup>1</sup> | SA1E-PP2-2M <sup>2</sup> |
|                                                                        | 3m when using IAC-R6                                                       | M8 Connector | 2m or 5m<br>(Order Separately) | Light ON         | SA1E-PN1C                | SA1E-PP1C                |
|                                                                        | 1.3m when using IAC-RS1<br>2m when using IAC-RS2<br>1.6m when using IAC-R7 |              |                                | Dark ON          | SA1E-PN2C                | SA1E-PP2C                |
| Polarized Retro-reflective Class 1 Laser<br>w/Sensing Range Adjustment | 10m                                                                        | Cable        | 2m                             | Light ON/Dark ON | SA1E-LPN3-2M             | SA1E-LPP3-2M             |
|                                                                        |                                                                            | M8 Connector | —                              |                  | SA1E-LPN3C               | SA1E-LPP3C               |


Without Sensitivity Adjustment: 1. SA1E-PN2-NA-2M, 2. SA1E-PP2-NA-2M

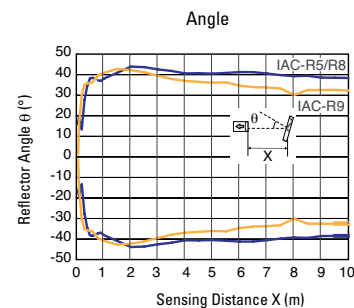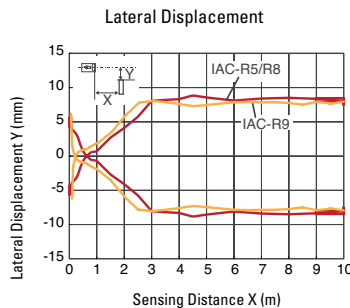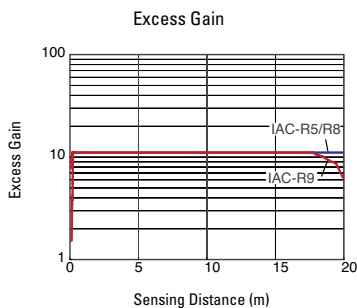

\*Sensing distance below 3 m: Defined as  $1/e^2$  (13.5%) of the center intensity  
Sensing distance over 3 m: Reference value (visual inspection)

800.262.4332

# Background suppression





www.IDEC.com/sensor

## Benefits of background suppression (fixed field) sensors:







- Reliable object recognition
- Fewer false alarms and product rejections
- Higher level of precision and repeatability

IDEC SA1E background suppression sensors determine the presence of target objects based on a predetermined sensing distance. This means objects beyond the cut-off range won't be detected, and ensures that target objects can be accurately and reliably detected regardless of color or reflectivity.

## Background suppression

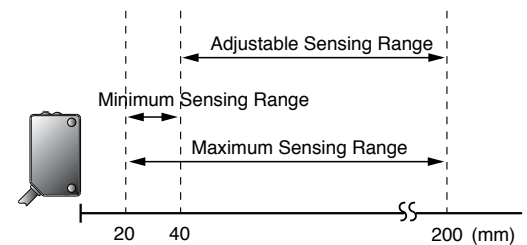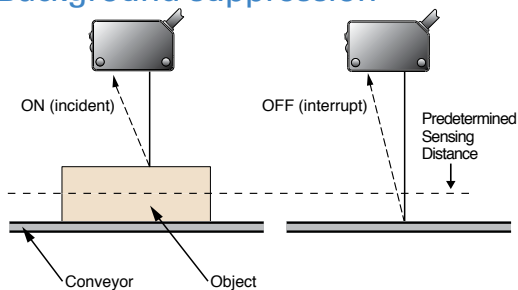

| Sensing Method                                                  | Sensing Range                                         | Connection   | Cable Length                   | Operation Mode   | Part Number  |              |
|-----------------------------------------------------------------|-------------------------------------------------------|--------------|--------------------------------|------------------|--------------|--------------|
|                                                                 |                                                       |              |                                |                  | NPN Output   | PNP Output   |
| Background suppression Red LED w/Sensing Range Adjustment       | 20 to 200mm<br>(Adjustable Sensing Range 40 to 200mm) | Cable        | 2m                             | Light ON         | SA1E-BN1-2M  | SA1E-BP1-2M  |
|                                                                 |                                                       |              |                                | Dark ON          | SA1E-BN2-2M  | SA1E-BP2-2M  |
|                                                                 |                                                       | M8 Connector | 2m or 5m<br>(Order Separately) | Light ON         | SA1E-BN1C    | SA1E-BP1C    |
|                                                                 |                                                       |              |                                | Dark ON          | SA1E-BN2C    | SA1E-BP2C    |
| Background suppression Class 1 Laser w/Sensing Range Adjustment | 20 to 300mm<br>(Adjustable Sensing Range 40 to 300mm) | Cable        | 2m                             | Light ON/Dark ON | SA1E-LBN3-2M | SA1E-LBP3-2M |
|                                                                 |                                                       | M8 Connector | —                              | Light ON/Dark ON | SA1E-LBN3C   | SA1E-LBP3C   |

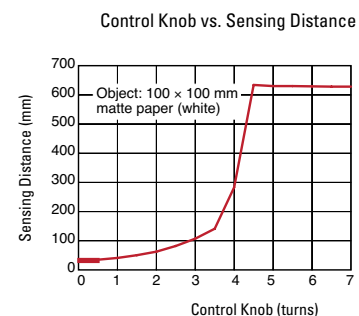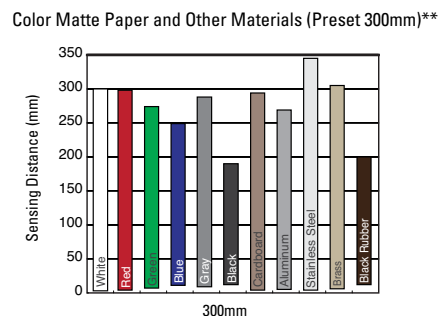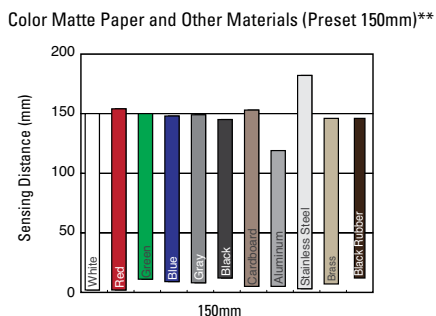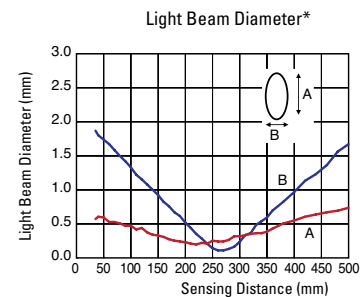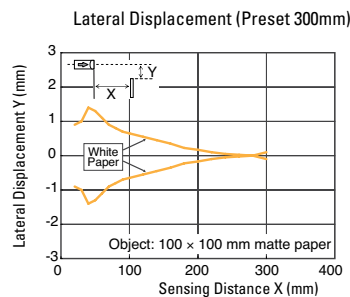


\*Light beam diameter: Defined as 1/e<sup>2</sup> (13.5%) of the center intensity

\*\*Comparison of sensing distance when set to detect white matte paper (100 × 100 mm)




# Convergent




## Benefits of convergent (point focus) sensors:

- Ideal for objects with low reflectivity and varying colors
- Reliable detection of objects with a small profile
- Accurate short distance sensing, while ignoring the background




IDEA SA1E convergent sensors focus the emitter and receiver to an exact point in front of the sensor. This method of sensing provides an intense and well-defined sensing area. This allows for detection of transparent objects.

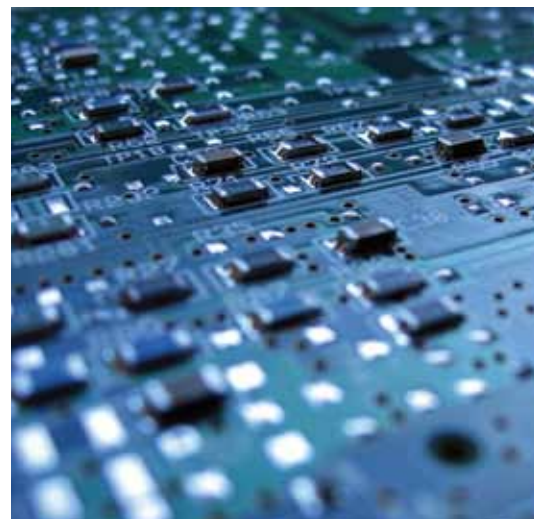


## Convergent

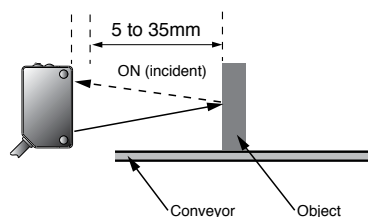

| Sensing Method             | Sensing Range | Connection | Cable Length                   | Operation Mode | Part Number |             |
|----------------------------|---------------|------------|--------------------------------|----------------|-------------|-------------|
|                            |               |            |                                |                | NPN Output  | PNP Output  |
| Convergent<br>Infrared LED | 5 to 35mm     | Cable      | 2m                             | Light ON       | SA1E-GN1-2M | SA1E-GP1-2M |
|                            |               |            |                                | Dark ON        | SA1E-GN2-2M | SA1E-GP2-2M |
|                            |               | Connector  | 2m or 5m<br>(Order Separately) | Light ON       | SA1E-GN1C   | SA1E-GP1C   |
|                            |               |            |                                | Dark ON        | SA1E-GN2C   | SA1E-GP2C   |

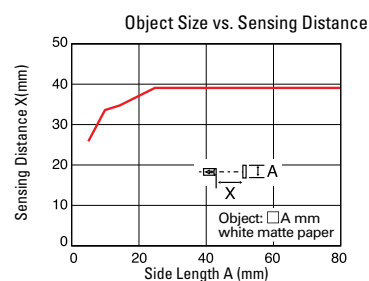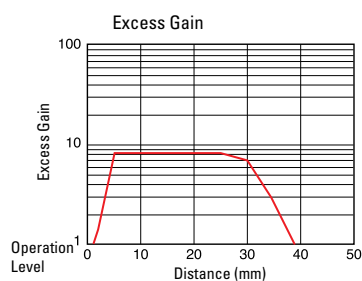

# Diffuse-reflective



[www.IDEC.com/sensor](http://www.IDEC.com/sensor)


## Benefits of diffuse-reflective sensors:

- Emitter and detector in one unit
- Easy alignment and a 700mm maximum sensing range
- Detects transparent or translucent objects



IDEC SA1E diffuse-reflective sensors have the emitter and receiver built into a single unit that allows these sensors to rely upon reflection from the surface of the target object. Light is sent from the sensor's emitter to the target objects and bounced back to the sensor's receiver. Diffuse sensing is the premiere choice for materials that are translucent to light. These sensors are also ideal for many types of applications because they are easy to setup and use. You only need to wire one unit and there is no need for a separate receiver or reflector.



## Diffuse-reflective

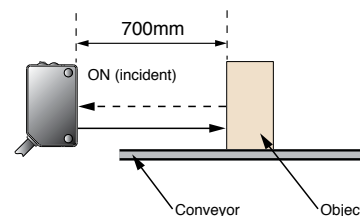


| Sensing Method                     | Sensing Range | Connection      | Cable Length                   | Operation Mode | Part Number |             |
|------------------------------------|---------------|-----------------|--------------------------------|----------------|-------------|-------------|
|                                    |               |                 |                                |                | NPN Output  | PNP Output  |
| Diffuse-reflective<br>Infrared LED | 700mm         | Cable           | 2m                             | Light ON       | SA1E-DN1-2M | SA1E-DP1-2M |
|                                    |               |                 |                                | Dark ON        | SA1E-DN2-2M | SA1E-DP2-2M |
|                                    |               | M8<br>Connector | 2m or 5m<br>(Order Separately) | Light ON       | SA1E-DN1C   | SA1E-DP1C   |
|                                    |               |                 |                                | Dark ON        | SA1E-DN2C   | SA1E-DP2C   |

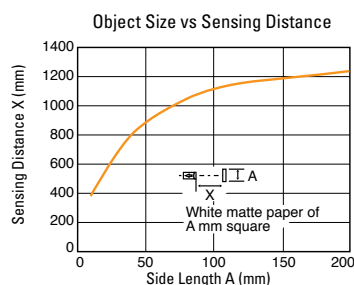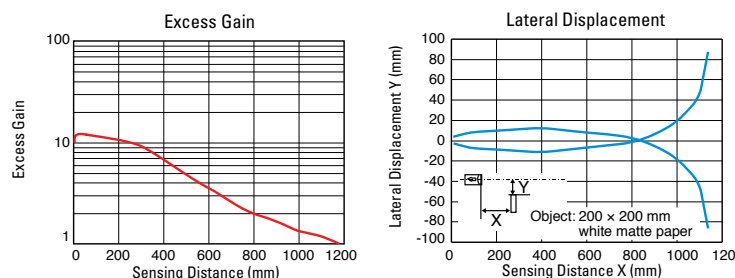

800.262.4332

# Small-beam reflective




## Benefits of small-beam reflective sensors:




- Emitter and detector in one unit
- Narrow beam ignores objects around target
- Detects small objects

IDEC SA1E small-beam reflective sensors operate like diffuse-reflective, the emitter and receiver are contained in the same housing. However, the small light beam generated by these sensors can reach a target in a narrow space at a distance up to 150mm. This makes them an ideal sensor for detecting very small objects, within a narrow field of vision.

## Small-beam reflective

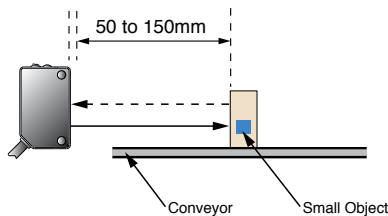


| Sensing Method                   | Sensing Range | Connection      | Cable Length                   | Operation Mode | Part Number |             |
|----------------------------------|---------------|-----------------|--------------------------------|----------------|-------------|-------------|
|                                  |               |                 |                                |                | NPN Output  | PNP Output  |
| Small-Beam Reflective<br>Red LED | 50 to 150mm   | Cable           | 2m                             | Light ON       | SA1E-NN1-2M | SA1E-NP1-2M |
|                                  |               |                 |                                | Dark ON        | SA1E-NN2-2M | SA1E-NP2-2M |
|                                  |               | M8<br>Connector | 2m or 5m<br>(Order Separately) | Light ON       | SA1E-NN1C   | SA1E-NP1C   |
|                                  |               |                 |                                | Dark ON        | SA1E-NN2C   | SA1E-NP2C   |

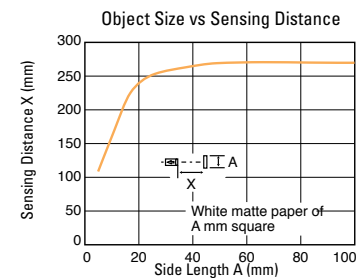



# Transparent



[www.IDEC.com/sensor](http://www.IDEC.com/sensor)


## Benefits of transparent sensors:

- Ideal for transparent, opaque, mirror-like objects
- Long sensing range - up to 2m
- Quick response time - 500 $\mu$ s


IDEC SA1E transparent Class1 laser sensors feature a coaxial optic and narrow beam to ensure stable detection. They can reliably solve challenging applications such as sensing of plastic, glass and other transparent bottles, transparent film for packaging, and wafer displacement.



## Transparent

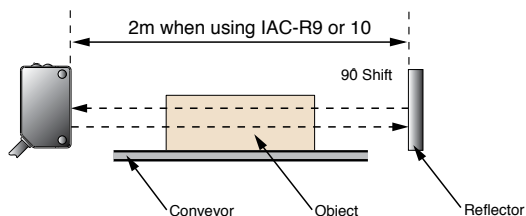

| Sensing Method                                                            | Sensing Range                                                          | Connection   | Cable Length | Operation Mode | Part Number |             |
|---------------------------------------------------------------------------|------------------------------------------------------------------------|--------------|--------------|----------------|-------------|-------------|
|                                                                           |                                                                        |              |              |                | NPN Output  | PNP Output  |
| Coaxial Polarized Retro-reflective<br>Red LED<br>w/Sensitivity Adjustment | 2m when using IAC-R9<br>2m when using IAC-R10<br>1m when using IAC-R11 | Cable        | 2m           | Light ON       | SA1E-XN1-2M | SA1E-XP1-2M |
|                                                                           |                                                                        |              |              | Dark ON        | SA1E-XN2-2M | SA1E-XP2-2M |
|                                                                           |                                                                        | M8 Connector | —            | Light ON       | SA1E-XN1C   | SA1E-XP1C   |
|                                                                           |                                                                        |              |              | Dark ON        | SA1E-XN2C   | SA1E-XP2C   |

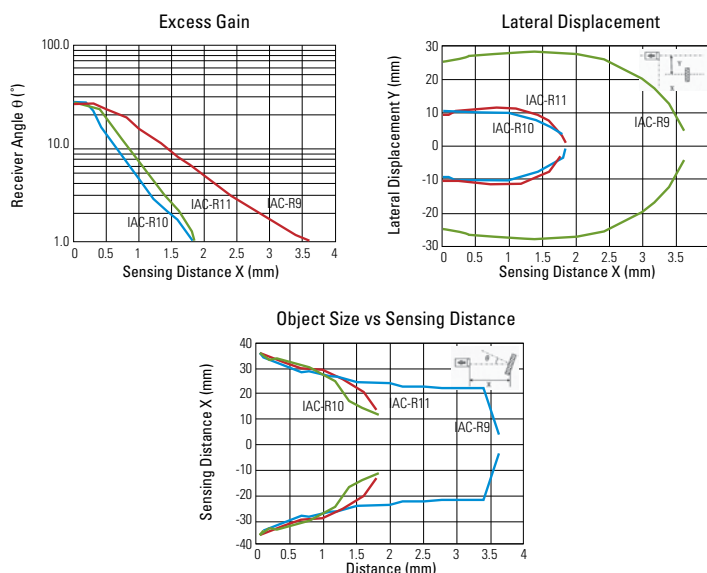

800.262.4332

# Accessories

## Reflectors (for polarized retro-reflective sensors)

| Item                                                                               |                             | Part Number |
|------------------------------------------------------------------------------------|-----------------------------|-------------|
|   | Standard reflector          | IAC-R5      |
|   | Small reflector             | IAC-R6      |
|                                                                                    | Large reflector             | IAC-R8      |
|                                                                                    | Narrow (rear/side mounting) | IAC-R7M     |
|                                                                                    | Narrow (side mounting)      | IAC-R7S     |
|                                                                                    | Narrow (rear mounting)      | IAC-R7B     |
|   | Tape (35 x 40mm)            | IAC-RS1     |
|                                                                                    | Tape (70 x 80mm)            | IAC-RS2     |
|  | Standard                    | IAC-R9*     |
|                                                                                    | Small                       | IAC-R10*    |
|                                                                                    | Ultra-small                 | IAC-R11*    |

\*for use with SA1E-X Brackets

## Mounting Brackets

| Item                                                                                |                             | Part Number |
|-------------------------------------------------------------------------------------|-----------------------------|-------------|
|  | Vertical mounting bracket   | SA9Z-K01    |
|  | Horizontal mounting bracket | SA9Z-K02    |
|                                                                                     | Cover mounting bracket      | SA9Z-K03    |
|  | Back mounting bracket       | SA9Z-K04    |
|  | Reflector mounting bracket  | IAC-L2      |
|  | Reflector mounting bracket  | IAC-L3      |
|                                                                                     | Reflector mounting bracket  | IAC-L5      |

## Slits (for through-beam sensors)

| Item                                                                               | Slit Size     | Part Number | Min. Order Qty |
|------------------------------------------------------------------------------------|---------------|-------------|----------------|
|  | 0.5mm x 18mm  | SA9Z-S06    | 2              |
|                                                                                    | 1.0mm x 18mm  | SA9Z-S07    |                |
|                                                                                    | 2.0mm x 18mm  | SA9Z-S08    |                |
|  | 0.5mm x 6.5mm | SA9Z-S09    |                |
|                                                                                    | 1.0mm x 6.5mm | SA9Z-S10    |                |
|                                                                                    | 2.0mm x 6.5mm | SA9Z-S11    |                |
|  | ø0.5mm        | SA9Z-S12    |                |
|                                                                                    | ø1.0mm        | SA9Z-S13    |                |
|                                                                                    | ø2.0mm        | SA9Z-S14    |                |

## Connector Cables (for connector model sensors)

| Item                                                                                | Number of Core Wires | Type & Length   | Part Number   |
|-------------------------------------------------------------------------------------|----------------------|-----------------|---------------|
|  | 4                    | Straight, 2m    | SA9Z-CM8K-4S2 |
|                                                                                     |                      | Straight, 5m    | SA9Z-CM8K-4S5 |
|                                                                                     |                      | Right angle, 2m | SA9Z-CM8K-4L2 |
|                                                                                     |                      | Right angle, 5m | SA9Z-CM8K-4L5 |

## Air Blower Mounting Blocks

| Appearance                                                                          | Item                      | Part Number |
|-------------------------------------------------------------------------------------|---------------------------|-------------|
|  | Air blower mounting block | SA9Z-A02    |

## Sensitivity Control Screwdriver

| Item                                                                                 | Part No.  | Package Quantity |
|--------------------------------------------------------------------------------------|-----------|------------------|
| Sensitivity Control Screwdriver                                                      | SA9Z-AD01 | 1                |
|  |           |                  |

800.262.4332

www.IDEC.com/sensor

# Technical Specifications


| Sensing Method            |                 | Through-beam                                                                                                                                                                              | Polarized Retro-reflective                                                                                                                                 | Diffuse-reflective                              | Small-beam Reflective                                 | Background Suppression (BGS)                                                     | Convergent Reflective                                 | Transparent                                           |               |
|---------------------------|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------------|---------------|
| Part Number               |                 | SA1E-□T                                                                                                                                                                                   | SA1E-□P                                                                                                                                                    | SA1E-D                                          | SA1E-N                                                | SA1E-□B                                                                          | SA1E-G                                                | SA1E-X                                                |               |
| Power Voltage             |                 | 12 to 24V DC (Operating range: 10 to 30V DC), Equipped with reverse-polarity protection                                                                                                   |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Current Draw              |                 | Projector: 15mA<br>Receiver: 20mA<br>Laser Receiver: 30mA                                                                                                                                 | 30 mA with laser: 35mA                                                                                                                                     |                                                 |                                                       |                                                                                  |                                                       | 20mA maximum                                          |               |
| Sensing Range             |                 | With sensitivity adjustment: 10m<br>Laser models: 30m                                                                                                                                     | w/ sensitivity adjustment:<br>2.5m (IAC-R5/R8)<br>1.5m (IAC-R6)<br>1.3m (IAC-RS2)<br>1.0m (IAC-RS1)<br>0.8m (IAC-R7□) <sup>1</sup><br>Laser models 0.3-10m | 700mm<br>(using 200 × 200mm<br>white mat paper) | 50 to 150mm<br>(using 100 × 100mm<br>white mat paper) | 20mm to preset<br>(using 200 × 200mm<br>white mat paper)<br>with laser: 20-300mm | 5 to 35mm<br>(using 100 × 100mm<br>white mat paper)   | 2m<br>(when using IAC-R9)                             |               |
|                           |                 | Without sensitivity adjustment: 15m                                                                                                                                                       | w/o sensitivity adjustment:<br>3.0m (IAC-R5/R8)<br>2.0m (IAC-R6)<br>1.4m (IAC-RS2)<br>1.1m (IAC-RS1)<br>1.0m (IAC-R7□) <sup>1</sup>                        |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Adjustable Sensing Range  |                 | —                                                                                                                                                                                         |                                                                                                                                                            |                                                 |                                                       | 40 to 200mm<br>with laser: 40-300mm                                              | —                                                     | —                                                     |               |
| Detectable Object         |                 | Opaque                                                                                                                                                                                    |                                                                                                                                                            | Opaque/Transparent                              |                                                       | Opaque                                                                           | Opaque/<br>Transparent                                | Opaque, transparent<br>and mirror-like objects        |               |
| Hysteresis                |                 | —                                                                                                                                                                                         |                                                                                                                                                            | 20% maximum                                     |                                                       | 10% maximum                                                                      | 20% maximum                                           | —                                                     |               |
| Response Time             |                 | 1ms maximum, with laser: 250us                                                                                                                                                            |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       | 500μs maximum |
| Sensitivity Adjustment    |                 | Adjustable using a potentiometer (approx. 260°)<br>Through-beam type and polarized retroreflective type are also available w/o sensitivity adjustment.<br>Laser models: 2 turn adjustment |                                                                                                                                                            |                                                 |                                                       | —                                                                                | Adjustable using a<br>potentiometer<br>(approx. 260°) | Adjustable using a<br>potentiometer<br>(approx. 240°) |               |
| Sensing Range Adjustment  |                 | —                                                                                                                                                                                         |                                                                                                                                                            |                                                 |                                                       | 6-turn control knob                                                              | —                                                     | —                                                     |               |
| Light Source Element      |                 | Infrared LED, Red LED, Red laser diode                                                                                                                                                    | Red LED<br>Red laser diode                                                                                                                                 | Infrared LED                                    | Red LED                                               | Red LED<br>Red laser diode                                                       | Infrared LED                                          | Red LED                                               |               |
| Operation Mode            |                 | Light ON/Dark ON                                                                                                                                                                          |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Control Output            |                 | NPN open collector or PNP open collector, 30V DC, 100 mA maximum<br>Voltage drop: 1.2V maximum (BGS type: 2V maximum), Short-circuit protection                                           |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| LED Indicators            |                 | Operation LED: Yellow<br>Stable LED: Green, Power LED: Green (Through-beam type projector)                                                                                                |                                                                                                                                                            |                                                 |                                                       | Operation LED: Yellow<br>Stable LED: None                                        | Operation LED: Yellow<br>Stable LED: Green            | Operation LED: Yellow<br>Stable LED: None             |               |
| Interference Prevention   |                 | —                                                                                                                                                                                         | Two units can be mounted in close proximity.                                                                                                               |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Degree of Protection      |                 | IP67 (IEC 60529)                                                                                                                                                                          |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Extraneous Light Immunity |                 | Sunlight: 10,000 lux maximum, Incandescent lamp: 5,000 lux maximum (at receiver)                                                                                                          |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Operating Temperature     |                 | −25 to +55°C (no freezing)                                                                                                                                                                |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Operating Humidity        |                 | 35 to 85% RH (no condensation)                                                                                                                                                            |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Storage Temperature       |                 | −40 to +70°C (no freezing)                                                                                                                                                                |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Insulation Resistance     |                 | Between live part and mounting bracket: 20 MΩ maximum (500V DC megger)                                                                                                                    |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Dielectric Strength       |                 | Between live part and mounting bracket: 1000V AC, 50/60Hz, 1 minute                                                                                                                       |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Vibration Resistance      |                 | Damage limits: 10 to 55Hz, Amplitude 0.75mm, 20 cycles in each of 3 axes                                                                                                                  |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Shock Resistance          |                 | Damage limits: 500m/s <sup>2</sup> , 10 shocks in each of 3 axes                                                                                                                          |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Material                  |                 | Housing: PC/PBT, Lens: PC (Polarized retroreflective / coaxial polarized retro-reflective: PMMA), Indicator cover: PC                                                                     |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Attachments               |                 | Instruction sheet                                                                                                                                                                         |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
| Weight (approx.)          | Cabel Model     | Projector: 30g<br>Laser Projector: 35g<br>Receiver: 30g <sup>2</sup><br>Laser Receiver: 35g                                                                                               | 30g <sup>2</sup><br>with laser: 35g                                                                                                                        |                                                 |                                                       | 35g <sup>3</sup>                                                                 | 30g <sup>2</sup>                                      | 35g <sup>3</sup>                                      |               |
|                           | Connector Model | Projector: 10g<br>Laser Projector: 20g<br>Receiver: 10g<br>Laser Receiver: 20g                                                                                                            | 10g<br>with Laser 20g                                                                                                                                      |                                                 |                                                       | 20g                                                                              | 10g                                                   | 20g                                                   |               |
| Connection Method         | Cable Model     | ø3.5mm, 3-core, 0.2mm <sup>2</sup> , 1-m vinyl cabtyre cable (2-core for the projector of through-beam type)                                                                              |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |
|                           | Connector Model | M8 connector (4-pin)                                                                                                                                                                      |                                                                                                                                                            |                                                 |                                                       |                                                                                  |                                                       |                                                       |               |

- Maintain at least the distance shown below between the SA1E photoelectric switch and reflector. IAC-R5/R6/R7□/R8: 100 mm, IAC-RS1/RS2: 150mm  
The detection distance cannot be guaranteed if the reflector is deformed or the tape type reflector is applied on uneven surface.
- Cable length: 1m (50g when the cable length is 2m, 55g for laser models. 110g when the cable length is 5m, 120g for laser models.)
- Cable length: 1m (55g when the cable length is 2m. 120g when the cable length is 5m.)
- For laser models insert L in place of □.

# Dimensions

## Cable Models



### Through-beam, Polarized Retro-reflective, Convergent, Diffuse-reflective, Small-beam reflective

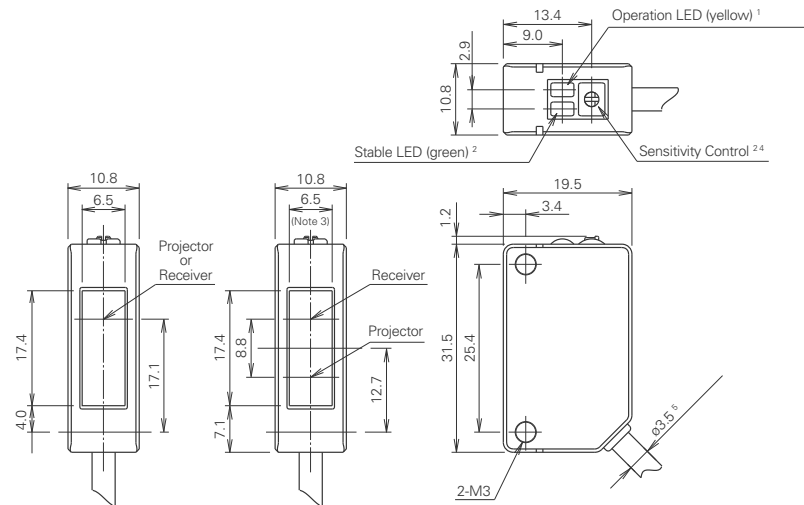

1. Power ON LED (green) for through-beam projector.
2. No sensitivity control and stable LED are attached on the through-beam projector.
3. 5.2 mm for polarized retroreflective model.
4. No sensitivity control is installed on the models without sensitivity adjustment.


## Background Suppression (BGS)

## Transparent

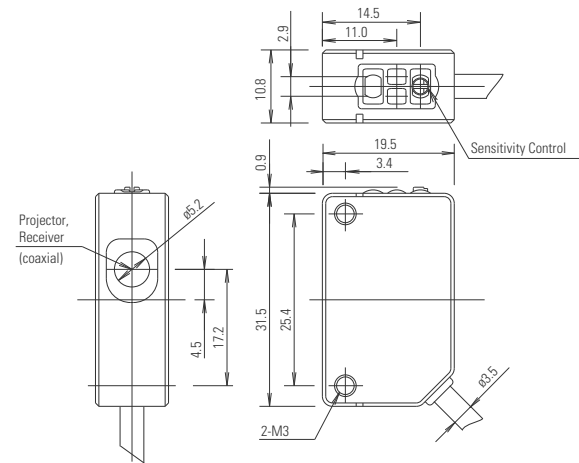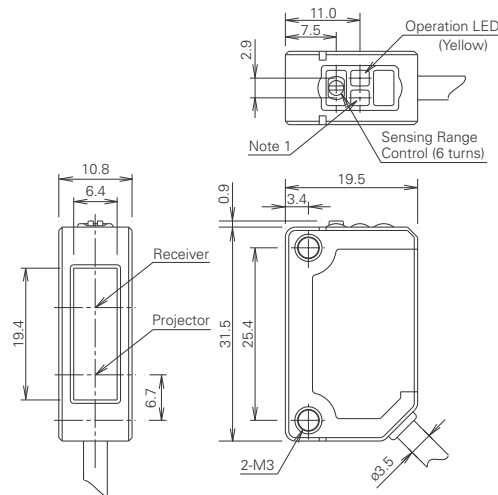

Stable LED is not provided on the background suppression or coaxial polarized retro-reflective models.


## Laser (Through-beam, Polarized Retro-reflective, Background Suppression)

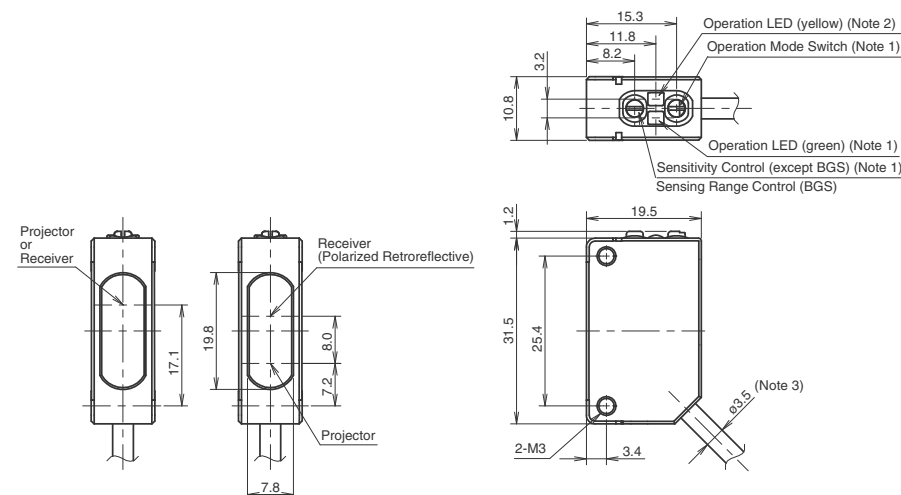



## Connector Models


### Through-beam, Polarized Retro-reflective, Convergent, Diffuse-reflective, Small-beam reflective

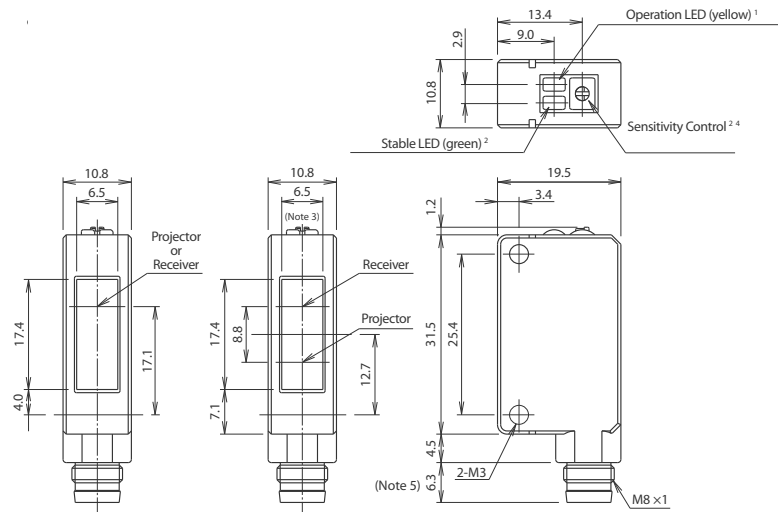

1. Power ON LED (green) for through-beam projector.
2. No sensitivity control and stable LED are attached on the through-beam projector.
3. 5.2 mm for polarized retroreflective model.
4. No sensitivity control is installed on the models without sensitivity adjustment.


### Background Suppression (BGS)

### Transparent

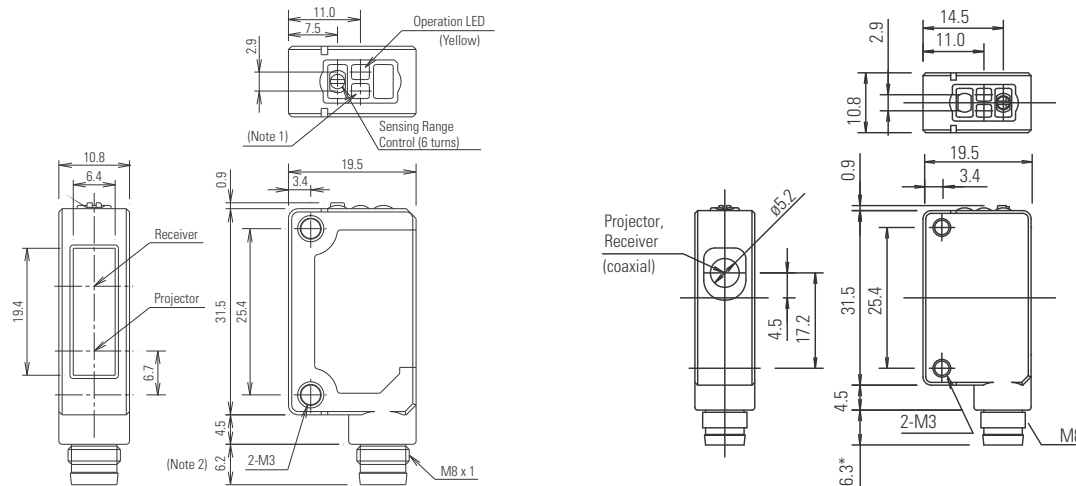

1. Stable LED is not provided on the background suppression or coaxial polarized retro-reflective models.
2. The connector length is 18mm when a right-angle connector cable is used.

### Laser (Through-beam, Polarized Retro-reflective, Background Suppression)

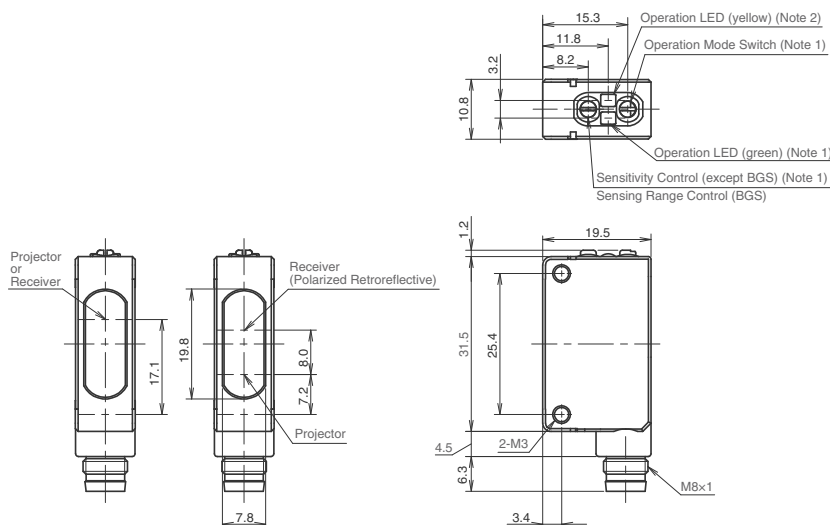



## The best PLCs for your money

IDEC controllers offer speed, power, performance and precision, as well as being easy to use, and easy to maintain. Just a simple, ready-made solution that won't require time you don't have to give. Instead, save time with a reliable product that gives you faster response, better throughput, and less downtime. For more information, visit [www.IDEC.com/plc](http://www.IDEC.com/plc).

## PLC Training

Want more MicroSmart and WindLDR experience? Get hands-on guidance from IDEC's expert technical staff. These intensive, three-day sessions cover PLC and touchscreen programming, setup, troubleshooting and more. Classes are held throughout the year at various locations in the US and Canada. For the latest schedule of upcoming classes, visit our web site at [training.IDEC.com](http://training.IDEC.com).

## Find your local IDEC Representative or Distributor

Visit [www.IDEC.com/usa/locator](http://www.IDEC.com/usa/locator) or call 800-262-IDEC.



## Get the power you need

IDEC power supplies offer worldwide approvals, universal voltage inputs, fused inputs, auto-resetting overload protection and various styles. In fact, the new PS5R Slim Line models give you all the power of a traditional power supply in only half the space. Utilize them in tight places or save valuable DIN Rail space while still filling your requirements for power. For more information, visit [www.IDEC.com/powersupply](http://www.IDEC.com/powersupply).



## Product Support

### Technical support:

[support@idec.com](mailto:support@idec.com)

### Sales support:

[sales@idec.com](mailto:sales@idec.com)



*Think Automation and beyond...*

800.262.4332

[www.IDEC.com/sensor](http://www.IDEC.com/sensor)

[www.IDEC.com](http://www.IDEC.com)

### USA

#### IDEC Corporation

Tel: (408) 747-0550  
[opencontact@idec.com](mailto:opencontact@idec.com)

### Canada

#### IDEC Canada Ltd.

Tel: (905) 890-8561  
[sales@ca.IDEC.com](mailto:sales@ca.IDEC.com)

### Australia

#### IDEC Australia Pty. Ltd.

Tel: +61-3-8523-5900  
[sales@au.IDEC.com](mailto:sales@au.IDEC.com)

### Japan

#### IDEC Corporation

Tel: +81-6-6398-2527  
[marketing@IDEC.co.jp](mailto:marketing@IDEC.co.jp)

### United Kingdom

#### IDEC Electronics Ltd.

Tel: +44-1256-321000  
[sales@uk.IDEC.com](mailto:sales@uk.IDEC.com)

### Germany

#### IDEC Elektrotechnik GmbH

Tel: +49-40-253054-0  
[service@IDEC.de](mailto:service@IDEC.de)

### Hong Kong

#### IDEC (H.K.) Co., Ltd.

Tel: +852-2803-8989  
[info@hk.IDEC.com](mailto:info@hk.IDEC.com)

### China/Beijing

#### IDEC (Beijing) Corporation

Tel: +86-10-6581-6131

### China/Shanghai

#### IDEC (Shanghai) Corporation

Tel: +86-21-6135-1515  
[idec@cn.IDEC.com](mailto:idec@cn.IDEC.com)

### China/Shenzhen

#### IDEC (Shenzhen) Corporation

Tel: +86-755-8356-2977

### Singapore

#### IDEC Asia Pte. Ltd.

Tel: +65-6746-1155  
[info@sg.IDEC.com](mailto:info@sg.IDEC.com)

### Taiwan

#### IDEC Taiwan Corporation

Tel: +886-2-2698-3929  
[service@tw.IDEC.com](mailto:service@tw.IDEC.com)

©2014 IDEC Corporation. All Rights Reserved.  
Catalog No. SA9Y-B100-0 04/14 PDF only

Specifications and other descriptions in this catalog are subject to change without notice.