


FREQUENCY MIXERS

Surface Mount

LEVEL 17 150 kHz to 6 GHz



+17 dBm LO, up to +10 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB				LO-IF ISOLATION, dB				IP3@ center band Typ. (dBm)	CASE STYLE	CONNECTION	PRICE \$				
	LO/RF f _L -f _U	IF	Mid-Band			Total Range Max.	L Typ.	M		U Typ.	L Typ.	M		U Typ.								
			$\bar{x}$	m	σ Max.			Min.	Min.			Min.	Min.						Min.			
JYM-20H	2-2000	4-700	5.7	.20	8.5	9.0	40	30	44	28	40	25	40	35	40	22	29	15	—	BJ293	hp	17.95
JYM-28H	400-2800	4-700	6.3	.20	8.0	9.0	40 (Typ.)	25 (Min.)					30 (Typ.)	15 (Min.)					—	BJ293	hp	21.95
JYM-30H	2-3000	4-1400	6.0	.20	8.9	10.6	40	30	40	25	30	25	40	35	30	20	22	15	—	BJ293	hp	23.95
► MBA-9H*	800-1000	DC-200	6.4	.30	—	9.0	30 (Typ.)	18 (Min.)					17 (Typ.)	12 (Min.)					18	SM2	lc	9.95***
► MBA-12H*	800-2500	DC-500	6.8	.20	—	9.5	30 (Typ.)	18 (Min.)					13 (Typ.)	7 (Min.)					18	SM2	lc	9.95***
► MBY-20H*	1700-2200	DC-700	5.5	.07	—	8.5	31 (Typ.)	24 (Min.)					30 (Typ.)	23 (Min.)					23	SM18	hp	11.95***
SYM-11H	50-2000	50-1950	6.3	.10	7.5	9.0	45	35	40	25	37	25	40	25	32	20	30	20	—	TTT167	x	17.95
TUF-18DHSM	100-1800	50-750	7.3	.15	8.5	9.0	41 (Typ.)	23 (Min.)					33 (Typ.)	20 (Min.)					27	NNN150	z	23.95

L = low range [f_L to 10 f_L]


M = mid range [10 f_L to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]

NOTES:

- Average of conversion loss at center of mid-band frequency ($f_L+f_U/4$)
- σ Standard deviation
- ◆ Aqueous washable. For non-aqueous washable requirements, LRMS units available in case style QQQ130
- † Phase detection, positive polarity
- ‡ Conversion loss increases up to 6 dB higher as IF frequency decreases from 5 MHz to DC.
- †† Conversion loss increases 0.5 dB when IF is above 150 MHz.
- * 15 dB min. over 1500-1800MHz
- + Conversion loss measured at IF frequency between 10 and 1300 MHz.
- * BLUE CELL™ mixers protected by U.S. Patents 5,534,830 5,640,132 5,640,134 5,640,699
- ** Protected under U.S. Patent 6133525
- *** Prices for quantities 10-49
- A. Environmental specifications and re-flow soldering information available in General Information Section.
- B. Units are non-hermetic unless otherwise noted. For details on case dimensions & finishes see "Case Styles & Outline Drawings".
- C. Prices and Specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. RF power 200mW
 - 1b. Peak IF current, 40mA

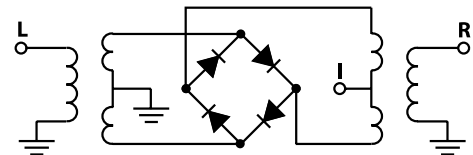

pin connections

see case style outline drawings

PORT	w	x	z	hp	ht ¹	je	jv	jw	ka	lc	lp
LO	1	2	4	5	6	1	6	4	11	10	3
RF	4	1	1	1	3	5	4	6	5	5	1
IF	5	3	2	7	2	7	3	3	2	3	2
GND EXT.	2,3,6	4,5,6	3	2,3,4,6,8	1,4,5	2,3,4,6,8	1,2,5	1,2,5	all other pins	1,4,7,8,9	4,5,6
CASE GND	—	—	—	—	—	—	—	—	—	—	—
ISOLATE	—	—	—	—	—	—	—	—	—	2,6	—
DEMO BOARD	TB-44	TB-12	—	TB-11	TB-03	TB-11	TB-02	TB-02	—	TB-117	TB-12

¹ pin connection physically same as w


NSN GUIDE

MCL NO. NSN
SYM-18H 5895-01-483-0503



Distribution Centers NORTH AMERICA 800-654-7949 • 417 335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

ISO 9001 CERTIFIED

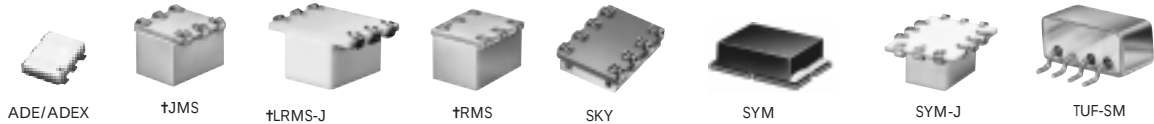

+17 dBm LO, up to +14 dBm RF

	MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB				LO-IF ISOLATION, dB				IP3@center band Typ. (dBm)	CASE STYLE	CONNECTION	PRICE \$				
		LO/RF f _L -f _U	IF	Mid-Band			Total Range Max.	L Typ. Min.	M Typ. Min.	U Typ. Min.	L Typ. Min.	M Typ. Min.	U Typ. Min.										
				$\bar{x}$	σ	Max.																	
NEW	◆ ADE-1H**	0.5-500	DC-500	5.3	.10	6.8	8.0	65	50	52	35	40	26	53	40	42	25	32	20	23	CD636	ht	4.95***
	◆ ADE-1HW**	5-750	DC-750	6.0	.10	7.2	8.8	64	45	48	35	42	28	50	35	40	30	30	18	26	CD542	ht	6.45***
	◆ ADE-10H**	400-1000	DC-500	7.0	.10	—	8.5	39 (Typ.)	29 (Min.)	—	—	—	—	25 (Typ.)	17 (Min.)	—	—	—	30	CD542	jw	7.95***	
	◆ ADE-12H**	500-1200	DC-250	6.7	.20	—	8.2	34 (Typ.)	25 (Min.)	—	—	—	—	28 (Typ.)	20 (Min.)	—	—	—	28	CD542	jv	8.95***	
	◆ ADE-17H**	100-1700	50-1500	7.2	.10	8.5	9.5	32	20	—	—	36	22	32	20	—	—	37	22	25	CD542	ht	8.95***
	◆ ADE-20H**	1500-2000	DC-300	5.2	.20	—	7.8	29 (Typ.)	22 (Min.)	—	—	—	—	31 (Typ.)	20 (Min.)	—	—	—	24	CD542	jv	8.95***	
	◆ ADEX-10H**	10-1000	DC-800	7.0	.10	8.5	9.5	68	55	55	40	47	31**	46	30	32	20	26	13	22	CD542	ht	3.45***
	JMS-1H	2-500	DC-500	5.90	.10	7.0	8.5	60	45	50	25	37	22	55	45	50	25	37	22	—	BH292	ht	11.45
	JMS-2H	20-1000	DC-1000	7.00	.15	8.4	9.5	63	40	50	28	35	20	56	30	47	22	37	20	—	BH292	ht	12.45
	JMS-5H	5-1500	DC-1000	5.90	.10	8.0	9.5	70	50	50	25	35	20	60	40	35	18	20	8	—	BH292	ht	12.95
	◆ LRMS-1HJ	2-500	DC-500	6.25	.034	7.0	8.5	55	44	44	25	33	20	50	34	45	25	37	22	—	QQQ569	w	10.95
	◆ LRMS-1WHJ	10-750	DC-750	7.00	.11	8.5	8.8	55	40	43	22	28	20	52	30	38	22	29	20	—	QQQ569	w	11.95
	◆ LRMS-2HJ	5-1000	DC-900	6.98	.054	8.5	9.3	55	40	39	22	33	20	52	30	45	22	30	17	—	QQQ569	w	11.95
	◆ LRMS-2UHJ	10-1000	10-750	7.10	.083	9.2	9.9	50	40	38	30	30	23	50	30	40	25	34	22	—	QQQ569	w	14.45
	◆ LRMS-5HJ	10-1500	DC-900	6.36	.05	8.0	9.8	65	40	36	20	22	15	50	30	30	18	17	7	—	QQQ569	w	17.95
	RMS-1H	2-500	DC-500	6.25	.034	7.0	8.5	55	44	44	25	33	20	50	34	45	25	37	22	—	TT240	w	10.95
	RMS-1WH	10-750	DC-750	7.00	.11	8.5	8.8	55	40	43	22	28	20	52	30	38	22	29	20	—	TT240	w	11.95
	RMS-2H	5-1000	DC-900	6.98	.054	8.5	9.3	55	40	39	22	33	20	52	30	45	22	30	17	—	TT240	w	11.95
	RMS-5H	10-1500	DC-900	6.36	.05	8.0	9.8	65	40	36	20	22	15	50	30	30	18	17	7	—	TT240	w	17.95
	SKY-53HR	2800-5300	DC-500	5.70	.20	—	9.5	28 (Typ.)	15 (Min.)	—	—	—	—	12 (Typ.)	8 (Min.)	—	—	—	—	—	BJ398	hp	18.95
	SKY-60H	2500-6000	DC-1500	6.20	.20	—	9.7	28 (Typ.)	17 (Min.)	—	—	—	—	14 (Typ.)	8 (Min.)	—	—	—	—	—	BJ398	je	18.95
	SYM-10DH	800-1000	20-200	7.6	—	—	9.3	45 (Typ.)	34 (Min.)	—	—	—	—	29 (Typ.)	20 (Min.)	—	—	—	31	TTT167	x	9.95***	
	SYM-10DHW	50-1000	20-800	7.0	—	8.5	9.8	48 (Typ.)	30 (Min.)	—	—	—	—	29 (Typ.)	20 (Min.)	—	—	—	25	TTT167	x	16.95	
	SYM-14H	100-1370	10-1000	6.50	.20	7.4	8.9	36 (Typ.)	28 (Min.)	—	—	—	—	30 (Typ.)	24 (Min.)	—	—	—	30	TTT167	x	9.95***	
	SYM-18H	5-1800	10-1500	5.75	.10	7.6	8.9+	50	28	45	35	40	24	39	22	50	30	30	22	30	TTT167	x	9.95***
	SYM-20DH	1700-2000	10-300	6.70	.16	—	8.2	35 (Typ.)	22 (Min.)	—	—	—	—	34 (Typ.)	22 (Min.)	—	—	—	32	TTT167	x	9.95***	
	SYM-20DHW	10-2000	10-1800	6.20	.10	7.5	8.8	33	20	40	25	37	22	44	30	42	28	34	22	27	TTT167	x	17.95
	SYM-22H	1500-2200	DC-200	5.6	.30	—	8.8	33 (Typ.)	22 (Min.)	—	—	—	—	38 (Typ.)	22 (Min.)	—	—	—	30	TTT167	x	9.95***	
	SYM-24DH	1400-2400	10-250	7.0	.20	—	9.3	32 (Typ.)	22 (Min.)	—	—	—	—	36 (Typ.)	23 (Min.)	—	—	—	29	TTT167	x	9.95***	
	SYM-25DHW	80-2500	DC-1000±	6.40	.10	8.0	8.6	46	29	37	25	35	20	38	26	33	24	36	20	30	TTT167	x	9.95***
	SYM-25H	10-2400	1-1100	6.1	.10	8.5	9.2	38	20	40	20	30	18	54	40	40	22	33	20	25	TTT167	lp	21.95
	SYM-36H	1500-3600	DC-600	6.3	.40	—	9.0	—	—	30	20	—	—	—	34	20*	—	—	—	25	TTT167	x	21.95
◆	SYM-10HJ	400-1000	DC-400	6.6	.10	—	8.0	46 (Typ.)	33 (Min.)	—	—	—	—	32 (Typ.)	18 (Min.)	25	CG581	ka	9	95***			
	TUF-1HSM	2-600	DC-600	5.90	.18	7.0	8.0	68	50	50	30	43	25	62	45	48	30	33	22	—	NNN150	z	10.20
	TUF-2HSM	50-1000	DC-1000	6.20	.22	7.5	9.0	58	40	47	30	42	25	58	35	44	25	28	18	—	NNN150	z	11.20
	TUF-3HSM	0.15-400	DC-400	5.00	.33	7.0	8.0	60	50	50	35	40	30	60	40	45	25	35	20	—	NNN150	z	12.45
	TUF-5HSM	20-1500	DC-1000	7.50	.17	8.5	9.0	62	55	50	40	38	25	40	25	29	18	20	8	—	NNN150	z	15.45
	TUF-11AHS	1400-1900	40-500	7.30	.28	9.0	9.0	35 (Typ.)	25 (Min.)	—	—	—	—	30 (Typ.)	15 (Min.)	—	—	—	—	—	NNN150	z	23.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

m = mid band [$2f_L$ to $f_U/2$]