

MN4066B / MN4066BS

Quad Analog Switches


■ Description

The MN4066B/S have 4 independent analog switches. A High on the enable input establishes a low impedance state (ON stage) between input and output of the switch. A Low establishes a high impedance (OFF stage).


MN4066B is pin-compatible to MN4016B. But MN4066B has low R_{ON} and better transfer characteristics. So applications are for analog/digital switching and chopper modulation and demodulation.

The MN4066B/S are equivalent to MOTOROLA MC14066B and RCA CD4066B.

■ Schematic Diagram (1/4)

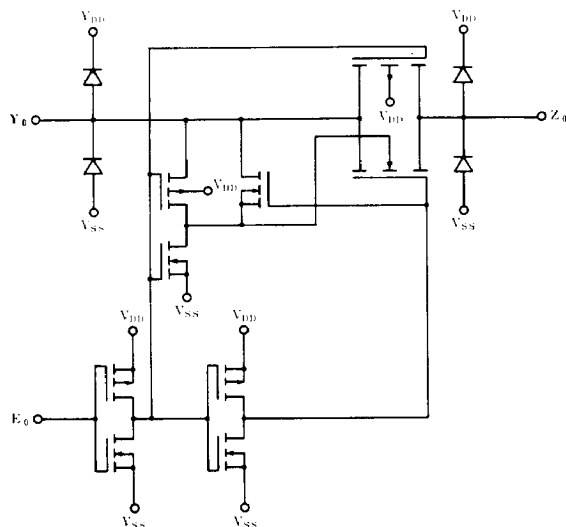

P-1




14-Pin • Plastic DIL Package

P-2



14-Pin • Pinflat Package (SO-14D)

Pin Configuration



Pin Explanation

$E_0 \sim E_3$: Enable input

$Y_0 \sim Y_3$: Analog input/output

$Z_0 \sim Z_3$: Analog input/output

■ Maximum Ratings (Ta=25°C)

Item	Symbol	Ratings	Unit
Supply Voltage	V _{DD}	-0.5 ~ +18	V
Input Voltage	V _I	-0.5 ~ V _{DD} +0.5*	V
Output Voltage	V _O	-0.5 ~ V _{DD} +0.5*	V
Peak Input · Output Current	± I _I	max. 10	mA
Power Dissipation (per package)	P _D	max. 400	mW
		Decrease up to 200mW rating at 8mW/°C	
Power Dissipation (per output terminal)	P _D	max. 100	mW
Operating Ambient Temperature	T _{opr}	-40 ~ +85	°C
Storage Temperature	T _{stg}	-65 ~ +150	°C

* V_{DD} + 0.5V should be under 18V■ DC Characteristics (V_{SS}=0V)

Item	V _{DD} (V)	Sym- bol	Conditions	Ta=-40°C		Ta=25°C		Ta=85°C		Unit
				min.	max.	min.	max.	min.	max.	
Quiescent Power Supply Current	5	I _{DD}	V _I =V _{SS} or V _{DD}	—	1	—	1	—	7.5	μA
	10			—	2	—	2	—	15	
	15			—	4	—	4	—	30	
Input Voltage Low Level	5	V _{IL}	I _O < 1μA V _O =0.5V or 4.5V	—	1.5	—	1.5	—	1.5	V
	10			—	3	—	3	—	3	
	15			—	4	—	4	—	4	
Input Voltage High Level	5	V _{IH}	I _O < 1μA V _O =0.5V or 4.5V	3.5	—	3.5	—	3.5	—	V
	10			7	—	7	—	7	—	
	15			11	—	11	—	11	—	
Input Leakage Current	15	± I _I	V _I =0 or 15V	—	0.3	—	0.3	—	1	μA

■ DC Characteristics (Ta=25°C, V_{SS}=0V)

Item	V _{DD} (V)	Symbol	Conditions	min.	typ.	max.	Unit
On Resistance	5	R _{ON}	V _{SS} =0V, V _I =5V	—	150	450	Ω
			V _{SS} =0V, V _I =2.5V	—	380	1140	
			V _{SS} =0V, V _I =0.25V	—	150	450	
	10	R _{ON}	V _{SS} =0V, V _I =10V	—	80	250	Ω
			V _{SS} =0V, V _I =5V	—	100	300	
			V _{SS} =0V, V _I =0.25V	—	100	300	
	15	R _{ON}	V _{SS} =0V, V _I =15V	—	60	180	Ω
			V _{SS} =0V, V _I =7.5V	—	70	210	
			V _{SS} =0V, V _I =0.25V	—	60	180	
	5	R _{ON}	V _{SS} =-5V, V _I =5V	—	100	300	Ω
			V _{SS} =-5V, V _I =±0.25V	—	100	300	
			V _{SS} =-5V, V _I =-5V	—	100	300	
Input Output of Leakage Current	10	I _{OFF}	V _I =10V, V _O =0V	—	30	125	nA
			V _I =0V, V _O =10V	—	30	125	
			V _I =15V, V _O =0V	—	60	250	
	15	I _{OFF}	V _I =0V, V _O =15V	—	60	250	nA

■ Switching Characteristics (Ta=25°C, V_{SS}=0V)

Item	V _{DD} (V)	Symbol	Conditions	min.	typ.	max.	Unit
Propagation Delay Time (Fig. 1) Vis→V _{OS}	5	t _{PHL}	R _L =10kΩ C _L =50pF E _n =V _{DD}	—	10	30	ns
	10			—	5	15	
	15			—	5	15	
Propagation Delay Time (Fig. 1) Vis→V _{OS}	5	t _{PLH}	R _L =10kΩ, C _L =50pF E _n =V _{DD}	—	10	30	ns
	10			—	5	15	
	15			—	5	15	
Propagation Delay Time (Fig. 1) E _n →V _{OS}	5	t _{PHZ}	R _L =10kΩ, C _L =50pF Vis=V _{DD} , R _L →V _{SS}	—	80	240	ns
	10			—	65	195	
	15			—	60	180	
Propagation Delay Time (Fig. 1) E _n →V _{OS}	5	t _{PLZ}	R _L =10kΩ, C _L =50pF Vis=V _{SS} , R _L →V _{DD}	—	80	240	ns
	10			—	70	210	
	15			—	70	210	
Propagation Delay Time (Fig. 1) E _n →V _{OS}	5	t _{PZH}	R _L =10kΩ, C _L =50pF Vis=V _{DD} , R _L →V _{SS}	—	40	120	ns
	10			—	20	60	
	15			—	15	45	
Propagation Delay Time (Fig. 1) E _n →V _{OS}	5	t _{PZL}	R _L =10kΩ, C _L =50pF Vis=V _{SS} , R _L →V _{DD}	—	45	135	ns
	10			—	20	60	
	15			—	15	45	
Sine Wave Distortion (Fig. 2)	5		R _L =10kΩ, C _L =50pF E _n =V _{DD} , f=1 kHz Vis=½ V _{DD} (P-P)	—	—	—	%
	10			—	0.1	—	
	15			—	0.1	—	
Crosstalk (Fig. 3) (Between 2 Channels)	5		R _L =1 kΩ Vis=½ V _{DD} (P-P)	—	—	—	MHz
	10			—	1	—	
	15			—	—	—	
Crosstalk (Fig. 1) E _n →V _{SS}	5		R _L =1 kΩ, C _L =15pF E _n =V _{DD}	—	—	—	mV
	10			—	80	—	
	15			—	—	—	
Feedthrough (Fig. 2)(Note) (OFF)	5		R _L =1 kΩ, C _L =50pF E _n =V _{SS} , Vis=½ V _{DD} (P-P)	—	—	—	kHz
	10			—	700	—	
	15			—	—	—	
Input Capacitance		C _I		—	—	7.5	pF

Fig. 1 Propagation Delay Time, Crosstalk Test Circuit

Fig. 2 Sine Wave Distortion, Feedthrough Test Circuit


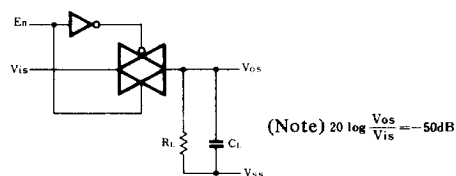


Fig. 3 Crosstalk Test Circuit

