

High efficiency, single-digit numeric displays


LA-301BL Series

The LA-301BL series were designed to meet the need for 8 mm single-digit numeric displays. These LED numeric displays use GaAsP on GaP for the emitting material (with the exception of green) and are housed in an epoxy resin package. They are single-digit displays with a character height of 8 mm.

●Features

- 1) Large display with small exterior dimensions.
- 2) Compact package with little worrisome light leakage from segment.
- 3) Red, orange, yellow, and green are available in common anode and common cathode configurations.
- 4) The package surface is painted black and the segments are colored the display color.

●External Dimensions (Units: mm)

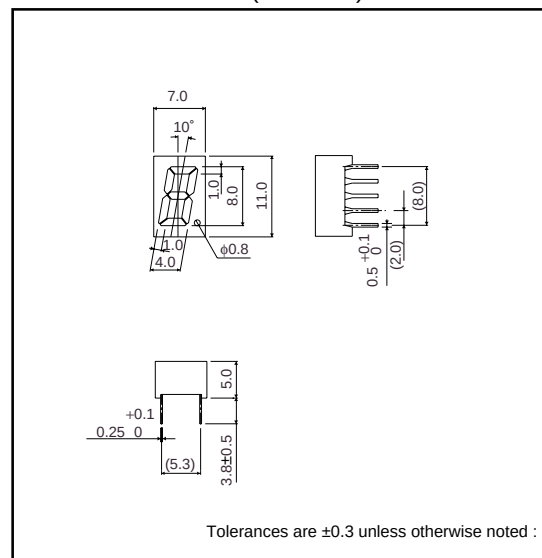


●Selection guide

Emitting color	Red	Orange	Yellow	Green
Common				
Anode	LA-301VB	LA-301DB *	LA-301YB *	LA-301MB
Cathode	LA-301VL	LA-301DL *	LA-301YL *	LA-301ML

* Order-based production.


●Pin assignments, BL series




Pin No.	Function
1	Segment "a"
2	Segment "f"
3	Segment "g"
4	Segment "e"
5	Segment "d"
6	D.P Cathode
7	D.P Anode
8	Segment "c"
9	Common
10	Segment "b"

LED displays

●Internal circuit schematic (example of common cathode)



(example of common anode)



●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Red	Orange	Yellow	Green	Unit
		LA-301VB / VL	LA-301DB / DL	LA-301YB / YL	LA-301MB / ML	
Power dissipation	P_D	320	320	320	480	mW
Power dissipation	P_D / seg	40	40	40	60	mW
Forward current	I_F	15	15	15	20	mA
Peak forward current	I_{FP}	60*	60*	60*	60*	mA
Reverse voltage	V_R	3	3	3	3	V
Operating temperature	Topr	-25--+75				°C
Storage temperature	Tstg	-30--+85				°C

* Pulse width 1ms duty 1 / 5

●Electrical and optical characteristics (Ta=25°C)

Parameter	Symbol	Conditions	Red			Orange			Yellow			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V_F	$I_F=10\text{mA}$	—	2.0	2.8	—	2.0	2.8	—	2.1	2.8	—	2.1	2.8	V
Reverse current	I_R	$V_R=3\text{V}$	—	—	100	—	—	100	—	—	100	—	—	100	μA
Peak wavelength	λ_P	$I_F=10\text{mA}$	—	650	—	—	610	—	—	585	—	—	563	—	nm
Spectral line half width	$\Delta\lambda$	$I_F=10\text{mA}$	—	40	—	—	40	—	—	40	—	—	40	—	nm

© Not designed for radiation resistance.

●Luminous intensity

Color	λ_P	Type	Min.	Typ.	Max.	Unit
Red	650	LA-301VB	3.6	10	—	mcd
		LA-301VL				
Orange	610	LA-301DB	2.2	6.3	—	mcd
		LA-301DL				
Yellow	585	LA-301YB	2.2	6.3	—	mcd
		LA-301YL				
Green	563	LA-301MB	3.6	10	—	mcd
		LA-301ML				

Note : Measured at $I_F=10\text{mA}$