


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
PROPERTY OF L-COM, INC., ANY REPRODUCTION IN PART OR WHOLE
WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	RELEASED	07/27/10	DFP
-	-	-	-
-	-	-	-

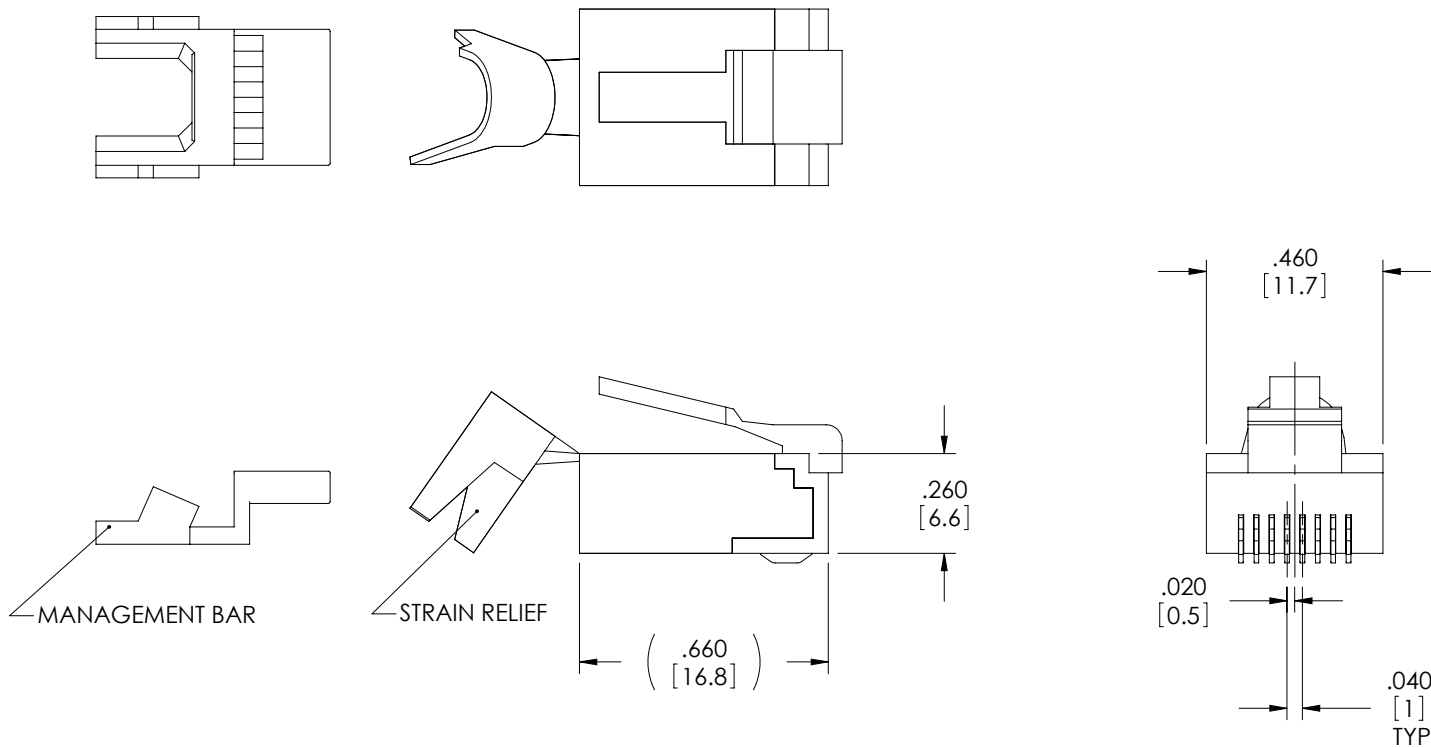

NOTES:

MATERIAL:

HOUSING AND MANAGEMENT BAR: CLEAR POLYCARBONATE

SHIELDING: NICKEL PLATED BRASS

CONTACTS: GOLD PLATED PHOSPHOR BRONZE

CONDUCTOR O.D. RANGE: 24 AND 26 AWG STRANDED OR SOLID WITH
MAX INSULATION O.D. .039"
CABLE O.D. RANGE: .228" to .256"

COMPLIES WITH TIA-1096
VOLTAGE RATING: 36V

RoHS Compliant ✓

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0% ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	APPROVALS	DATE	 Global Connectivity 45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845			
	DRAWN BY D. PARHAM	07/27/2010				
	CHECKED BY ENG	07/27/2010	CATEGORY	MODULAR		
	APPROVED BY P. McNEIL	07/27/2010	PRODUCT DESCRIPTION			
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY		SHIELDED RJ45 PLUG			
	PROJECTION	COLOR VARIATIONS MAY OCCUR	SIZE A	FSCM NO. 43321	DWG. NO. TDS8PC5-V1	REV. A
	CS226	SCALE: NONE	CAD FILE: TDS8PC5-V1.SLDDRW	SHEET 1 OF 1		