


Schottky Barrier Rectifier



Features:

- 1A operation schottky barrier rectifiers at $T_A = 75^\circ\text{C}$ with no thermal runaway
- Exceeds environmental standards of MIL-S-19500/228
- For use in low voltage, high frequency inverters free wheeling, and polarity protection applications
- DO-41 plastic package

Mechanical Data:

Case	: Moulded plastic
Terminal	: Axial leads, solderable per MIL-STD-202, Method 208
Polarity	: Colour band denotes cathode
Mounting position	: Any

Maximum Ratings and Electrical Characteristics:

Ratings at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive loa

Parameters	SB140	SB160	Units
Maximum repetitive peak reverse voltage	40	60	V
Maximum RMS voltage	26	42	
Maximum DC blocking voltage	40	60	
Maximum forward voltage at 1A	0.5	0.7	
Maximum average forward rectified current 0.375" lead length at T _A = 75°C	1		A
Peak forward surge current I _{FM} (surge) 8.3m seconds single half sine-wave superimposed on rated load (JEDEC Method)	30		
Maximum full load reverse current, full cycle average at T _A = 75°C			
Maximum reverse current T _A = 25°C at rated reverse voltage T _t = 100°C	0.5 10		mA
Typical junction capacitance (Note 1)	110		
Typical thermal resistance R _{θJA} (Note 2)	80		°C/W
Operating and Storage temperature range	-50 to +125		°C

Notes:

1. Measured at 1MHz and applied reverse voltage of 4V DC
2. Thermal resistance junction to ambient

Schottky Barrier Rectifier

Rating and Characteristics Curves

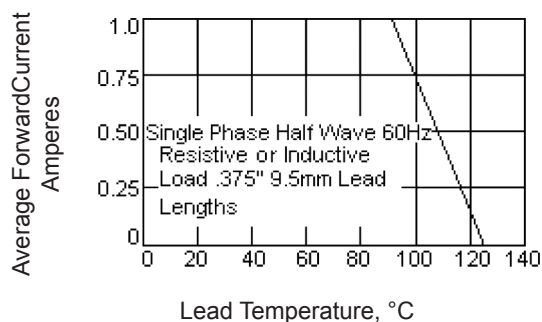


Figure 1 - Forward Current Derating Curve

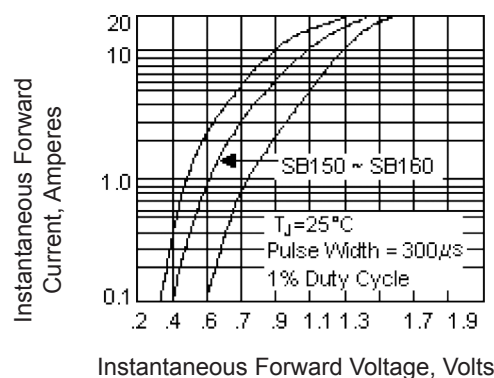


Figure 2 - Typical Instantaneous Forward Characteristics

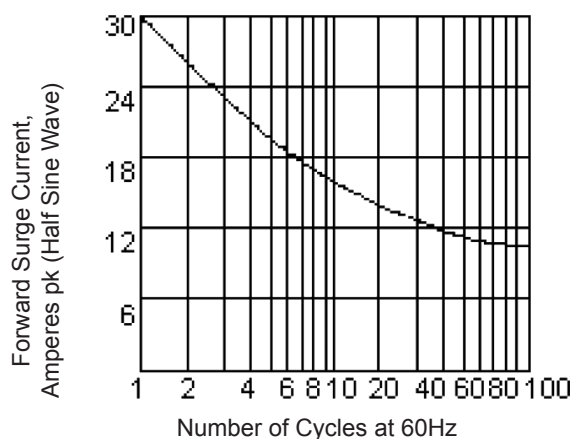


Figure 3 - Maximum Non-Repetitive Surge Current


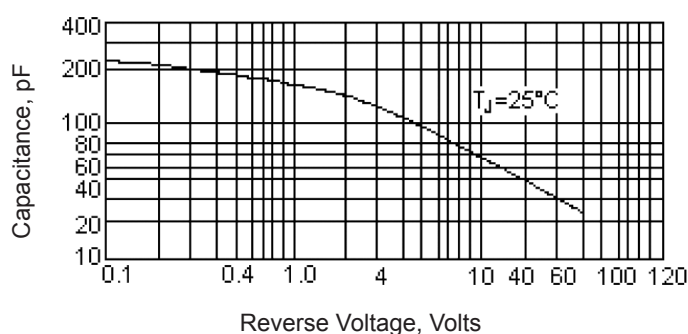


Figure 4 - Typical Junction Capacitance

Schottky Barrier Rectifier



DO-41

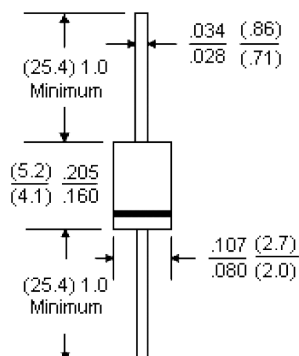

Dimensions: Inches (Millimetres)

Part Number Table

Description	Part Number
Diode, Schottky, 1A, 40V	SB140
Diode, Schottky, 1A, 60V	SB160

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

