

Varicon®


Series 5203 – Contact Strip

Perpendicular Cards – Pad Spacing .100"



FEATURES

- For $\frac{1}{16}$ " and $\frac{3}{32}$ " thick p.c. cards
- Contacts supplied imbedded in vinyl strips, correctly spaced and ready for insertion and staking into p.c. card
- Complete set of plug contacts supplied on two disposable plastic strips, one for upper-tier contacts, the other for lower-tier contacts
- Efficient and economical installation equipment includes staking and strip removal tools for all applications

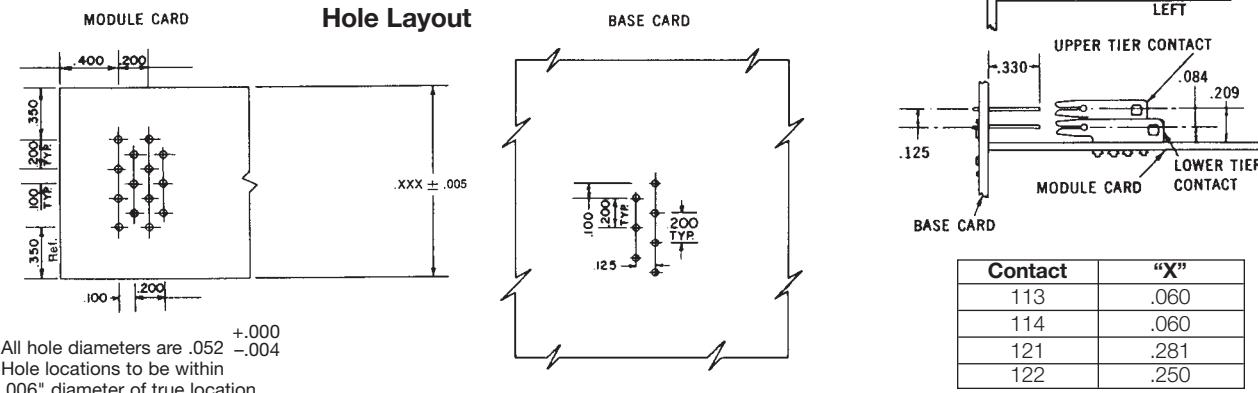

TECHNICAL SPECIFICATIONS

Current Rating:
8 amperes


Contact Resistance:
0.006 Ohm, maximum
†ELCO Standard Plating shown. Other plating may be supplied on request.

Contact Material and Plating:
Phosphor Bronze

†Gold, 10 microinches minimum,
over nickel, 50 to 100 microinches


Insertion/Withdrawal Force:
2 to 16 ounces per contact

ORDERING CODE – BASE CARD CONTACTS

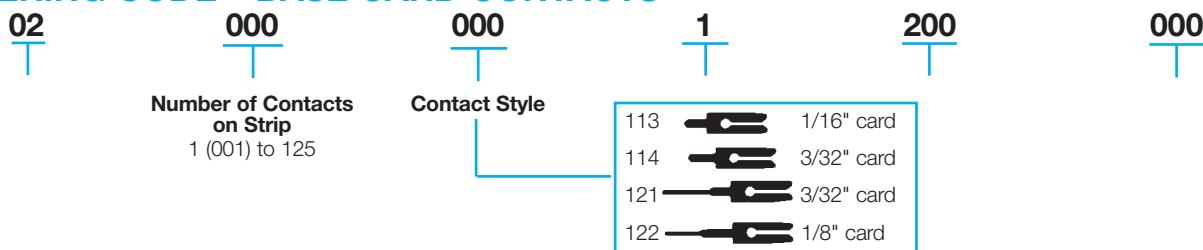

ORDERING CODE – MODULE CARD CONTACTS

Upper-tier and Lower-Tier Contacts on Separate Strips

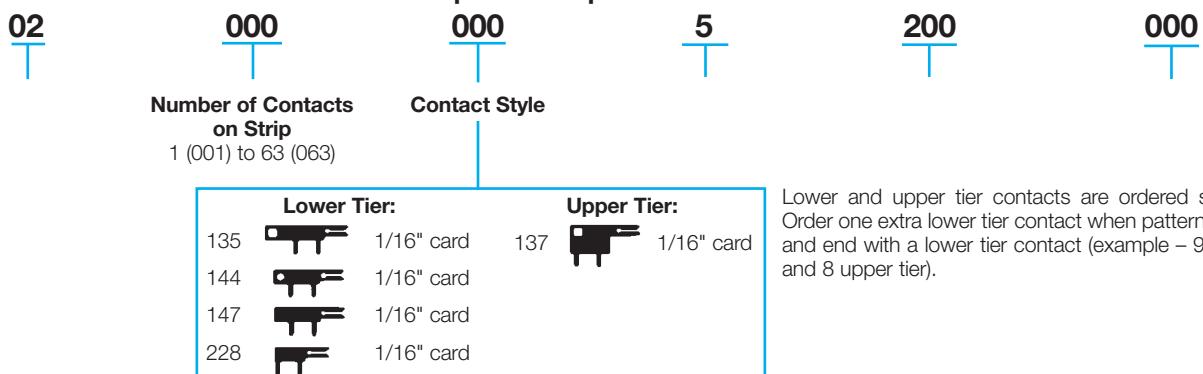

For loose contacts, order by individual part numbers tabulated on page 53.

Lower and upper tier contacts are ordered separately.
Order one extra lower tier contact when pattern is to start and end with a lower tier contact (example – 9 lower tier and 8 upper tier).