


MATERIALS	
CONNECTORS	BRASS NICKEL PLATED
CONTACT	GOLD PLATED
INSULATOR	PTFE
HEAT SINK	ANODIZED ALUMINUM

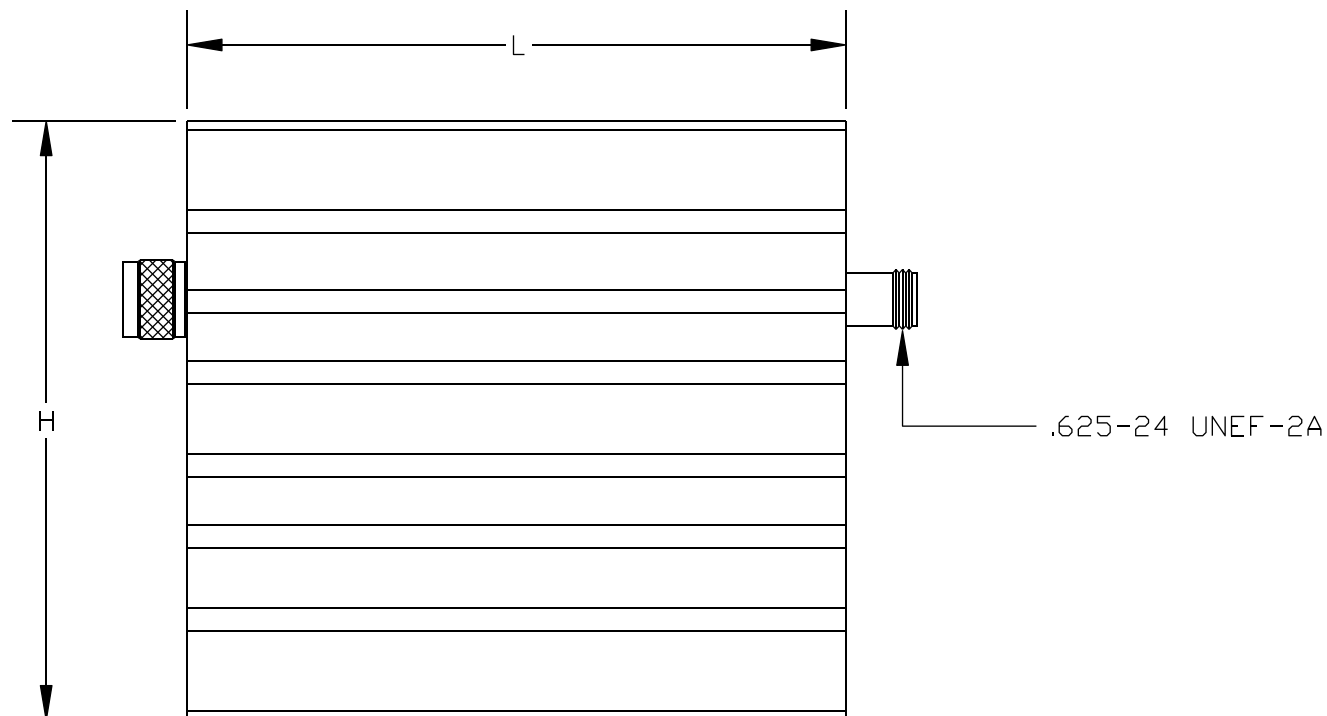

HEAT SINK

LENGTH = 6.890

HEIGHT = 6.250

WIDTH = 6.250

SPECIFICATIONS

FREQUENCY RANGE: DC TO 1 GHz

ATTENUATION: 6 dB

IMPEDANCE: 50 OHMS

ACCURACY: ± 0.5 dB

VSWR: 1.4:1 MAXIMUM

RF INPUT POWER: 300 WATT AVERAGE AT 25°C

DERATED TO 75 WATTS AT 85°C



PASTERNAK ENTERPRISES, INC.

P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS

DWG TITLE

PE7031-6

DES. N ATTENUATOR MALE TO FEMALE 300 WATT,
FREQUENCY RANGE: DC TO 1 GHz

REV. B

FSCM NO. 53919

CAD FILE 030408

SCALE N/A

SIZE A

147

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES.