



American Opto Plus LED Corp.
0.2”SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **EDIT HISTORY**

Version A: Nov. 13, 2012

New color data sheet.



American Opto Plus LED Corp.
0.2”SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **FEATURES**

- 0.2 inch (5.08 mm) Digit Height.
- Low current operation.
- SMD type.
- Gray face, White segment.
- RoHS compliant, Pb Free.

● **DESCRIPTION**

The SMA201LB G/W and SMC201LB G/W are 0.2 inch (5.08 mm) height Single digits display.

This device utilizes Super Bright Blue LED chip which are made from InGaN On a transparent GaN substrate.

The display has Gray face, White segment.

● **DEVICE**

PART NO	DESCRIPTION
SMA201LB G/W	Common Anode
SMC201LB G/W	Common Cathode

RoHS Compliance




Pb free.





American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **MECHANICAL DIMENSIONS**

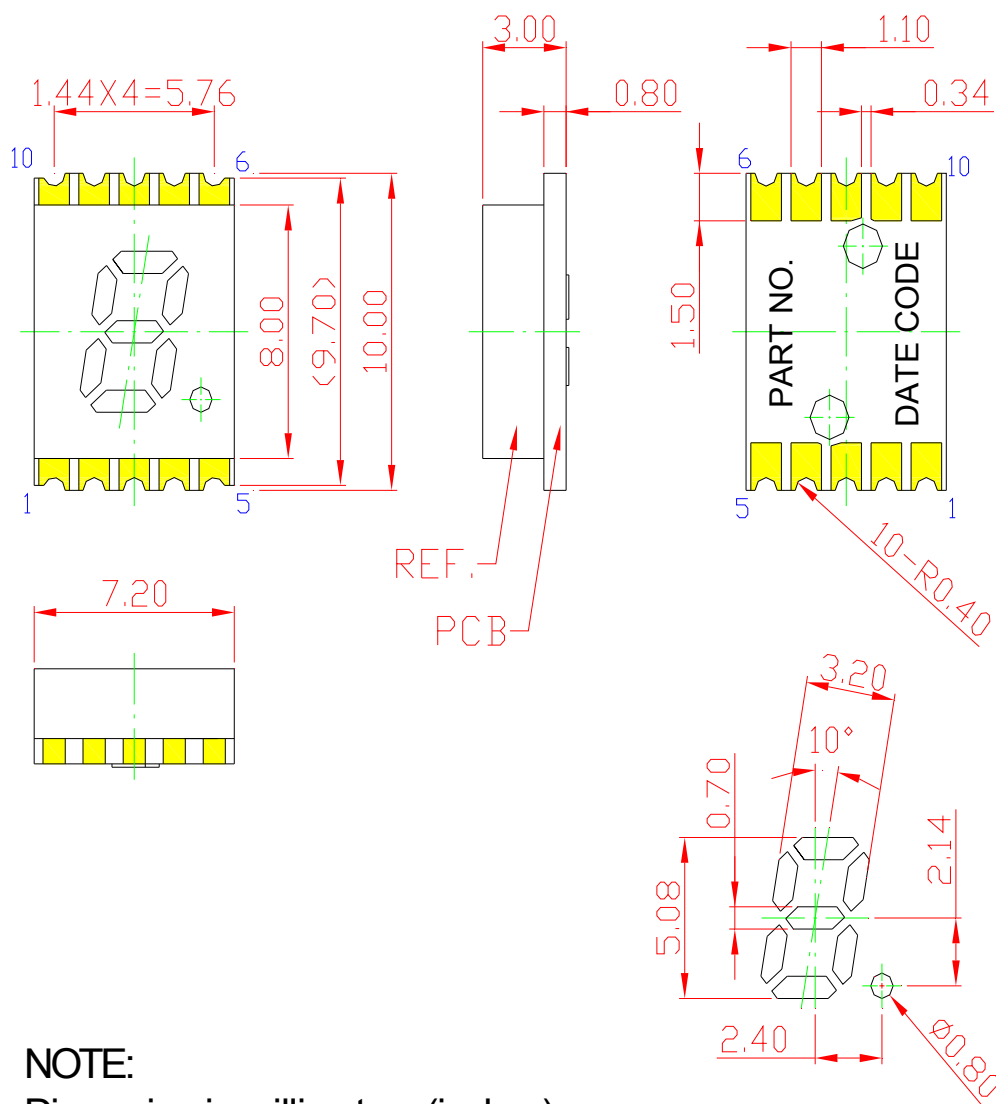

NOTE:


Dimension in millimeters (inches),
and tolerances are $\pm 0.25\text{mm}$ (.01") specified.



American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **TYPICAL INTERNAL EQUIVALENT CIRCUIT**

**Recommended
Soldering Pattern**

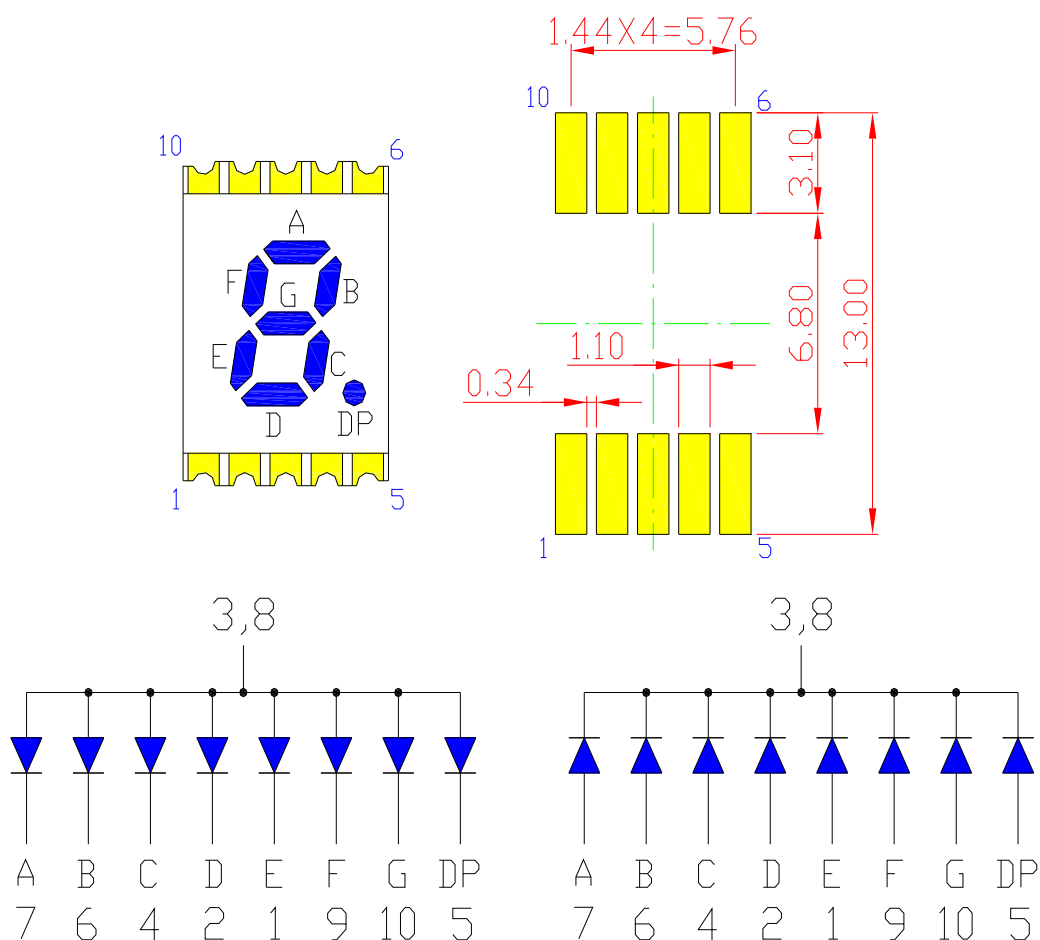

SMA201LB G/W
(Common Anode)

SMC201LB G/W
(Common Cathode)



American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **LB: SUPER BRIGHT BLUE (InGaN/GaN)**

ABSOLUTE MAXIMUM RATING AT Ta=25°C

Parameter	Symbol	Maximum Rating	Unit
Power dissipation	P _{AD}	120	mW
Derating liner from 25°C	-	0.3	mA / °C
Continuous forward current	I _{AF}	30	mA
Peak current (duty cycle 1/10, 1kHz)	I _{PF}	100	mA
Reverse voltage	V _R	5	V
Operating temperature	T _{OPR}	-40 to +105	°C
Storage temperature	T _{STG}	-40 to +105	°C

ELECTRICAL - OPTICAL CHARACTERISTICS AT Ta=25°C

Characteristic	Symbol	Condition	Min.	Type.	Max.	Unit
Forward Voltage, (Per Dice)	V _F	I _F =20mA	-	3.2	4.0	V
Reverse Current, (Per Dice)	I _R	V _R =8V	-	-	10	μA
Dominant Wavelength	λ _D	I _F =20mA	-	470	-	nm
Luminous Intensity	I _V	I _F =20mA	-	20	-	mcd
Spectral radiation bandwidth	Δλ	I _F =20mA	-	30	-	nm



American Opto Plus LED Corp.







0.2" SMD Type LED Display

SMA201LB G/W

SMC201LB G/W

● LB: SUPER BRIGHT BLUE (InGaN/GaN) CURVE

Typical Electro-optical Characteristic Curves
(25 °C Free Air Temperature Unless Otherwise Specified)

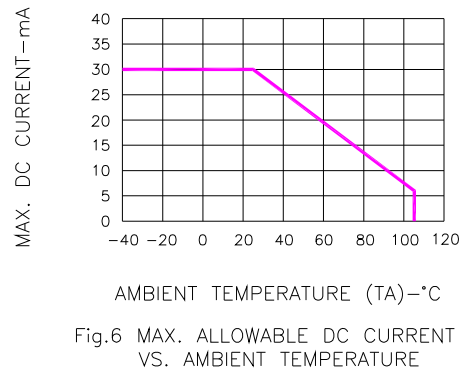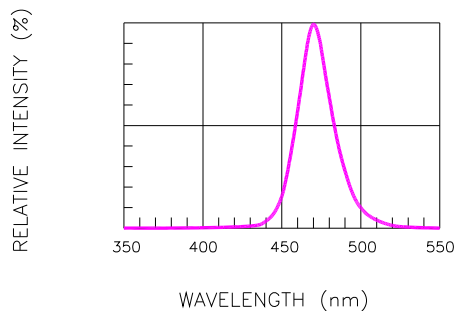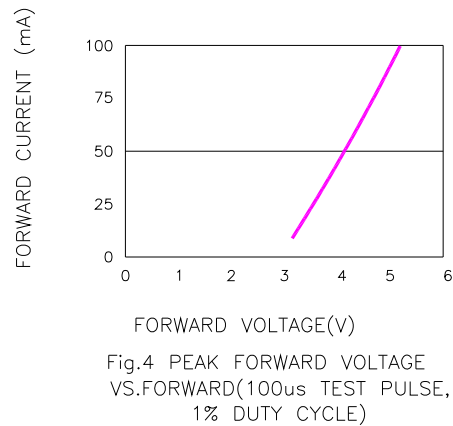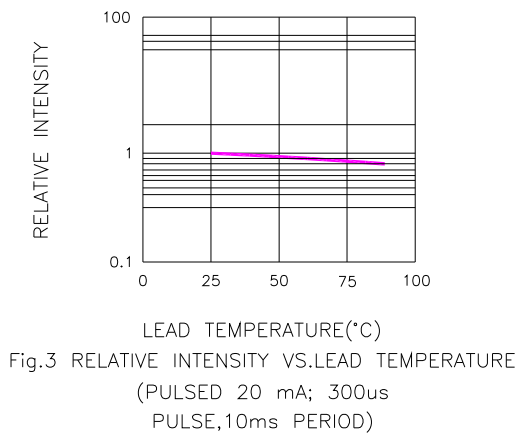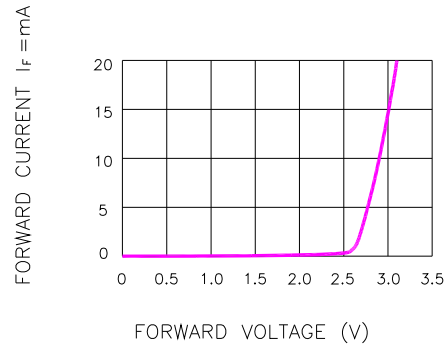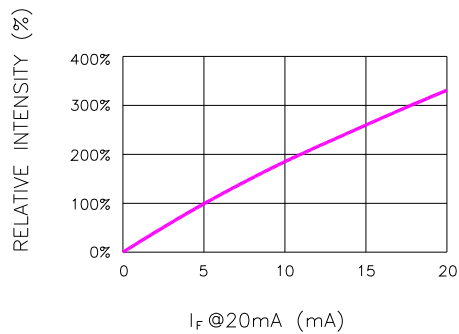




American Opto Plus LED Corp.
0.2" SMD Type LED Display
SMA201LB G/W
SMC201LB G/W

● **SMT REFLOW SOLDERING INSTRUCTIONS**

SMT Soldering Profile

Pb free reflow soldering Profile

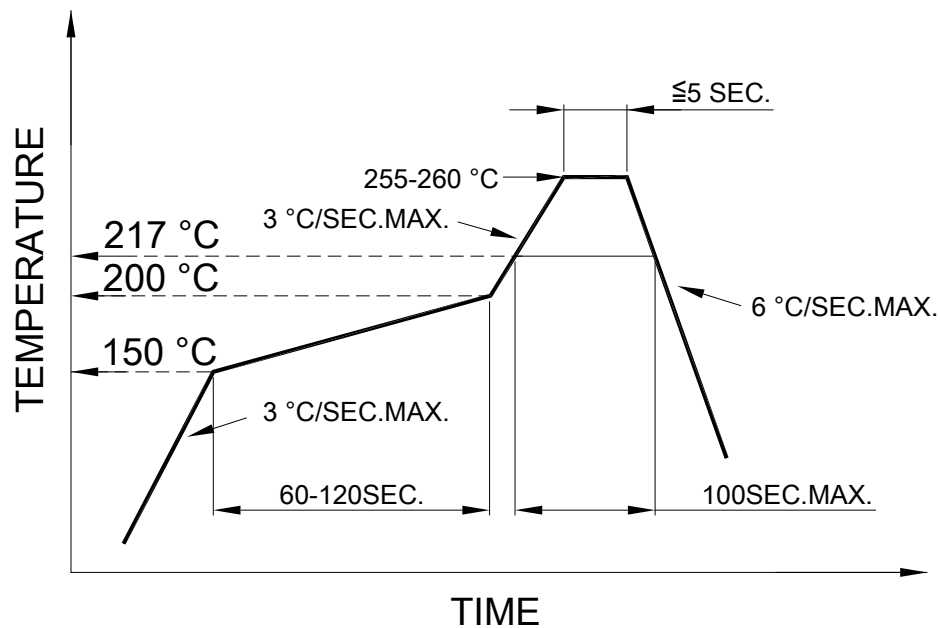

● **SOLDERING IRON**

Basic spec is ≤ 4 sec when 260 °C. If temperature is higher, time should be shorter (+10 °C → 1 sec). Power dissipation of Iron should be smaller than 15W, and temperature should be controllable. Surface temperature of the device should be under 230 °C.

● **REWORK**

- Customer must finish rework within 3 sec. under 350 °C.
- The head of soldering iron cannot touch copper foil.