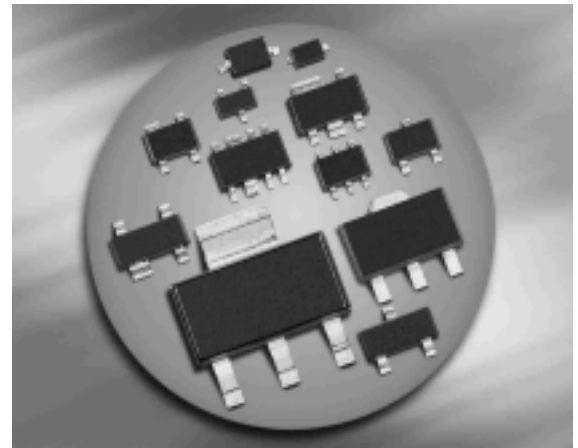



**PNP Silicon Digital Transistor**

- Switching circuit, inverter, interface circuit, driver circuit.
- Built in bias resistor ( $R_1 = 10 \text{ k}\Omega$ )


**BCR179F/L3**  
**BCR179T**


| Type     | Marking | Pin Configuration |     |     |   |   |   | Package  |
|----------|---------|-------------------|-----|-----|---|---|---|----------|
| BCR179F  | WWs     | 1=B               | 2=E | 3=C | - | - | - | TSFP-3   |
| BCR179L3 | WW      | 1=B               | 2=E | 3=C | - | - | - | TSFP-3-4 |
| BCR179T  | WW      | 1=B               | 2=E | 3=C | - | - | - | SC75     |

**Maximum Ratings**

| Parameter                              | Symbol       | Value       | Unit             |
|----------------------------------------|--------------|-------------|------------------|
| Collector-emitter voltage              | $V_{CEO}$    | 50          | V                |
| Collector-base voltage                 | $V_{CBO}$    | 50          |                  |
| Input forward voltage                  | $V_{i(fwd)}$ | 40          |                  |
| Input reverse voltage                  | $V_{i(rev)}$ | 5           |                  |
| Collector current                      | $I_C$        | 100         | mA               |
| Total power dissipation                | $P_{tot}$    |             | mW               |
| BCR179F, $T_S \leq 128^\circ\text{C}$  |              | 250         |                  |
| BCR179L3, $T_S \leq 135^\circ\text{C}$ |              | 250         |                  |
| BCR179T, $T_S \leq 109^\circ\text{C}$  |              | 250         |                  |
| Junction temperature                   | $T_j$        | 150         | $^\circ\text{C}$ |
| Storage temperature                    | $T_{stg}$    | -65 ... 150 |                  |

**Thermal Resistance**

| Parameter                                | Symbol     | Value      | Unit |
|------------------------------------------|------------|------------|------|
| Junction - soldering point <sup>1)</sup> | $R_{thJS}$ |            | K/W  |
| BCR179F                                  |            | $\leq 90$  |      |
| BCR179L3                                 |            | $\leq 60$  |      |
| BCR179T                                  |            | $\leq 165$ |      |

**Electrical Characteristics at  $T_A = 25^\circ\text{C}$ , unless otherwise specified**

| Parameter | Symbol | Values |      |      | Unit |
|-----------|--------|--------|------|------|------|
|           |        | min.   | typ. | max. |      |

**DC Characteristics**

|                                                                                                      |               |     |    |     |            |
|------------------------------------------------------------------------------------------------------|---------------|-----|----|-----|------------|
| Collector-emitter breakdown voltage<br>$I_C = 100 \mu\text{A}$ , $I_B = 0$                           | $V_{(BR)CEO}$ | 50  | -  | -   | V          |
| Collector-base breakdown voltage<br>$I_C = 10 \mu\text{A}$ , $I_E = 0$                               | $V_{(BR)CBO}$ | 50  | -  | -   |            |
| Collector-base cutoff current<br>$V_{CB} = 40 \text{ V}$ , $I_E = 0$                                 | $I_{CBO}$     | -   | -  | 100 | nA         |
| Emitter-base cutoff current<br>$V_{EB} = 5 \text{ V}$ , $I_C = 0$                                    | $I_{EBO}$     | -   | -  | 100 | nA         |
| DC current gain <sup>2)</sup><br>$I_C = 5 \text{ mA}$ , $V_{CE} = 5 \text{ V}$                       | $h_{FE}$      | 120 | -  | 630 | -          |
| Collector-emitter saturation voltage <sup>2)</sup><br>$I_C = 10 \text{ mA}$ , $I_B = 0.5 \text{ mA}$ | $V_{CEsat}$   | -   | -  | 0,3 | V          |
| Input off voltage<br>$I_C = 100 \mu\text{A}$ , $V_{CE} = 5 \text{ V}$                                | $V_{i(off)}$  | 0.4 | -  | 1   |            |
| Input on voltage<br>$I_C = 2 \text{ mA}$ , $V_{CE} = 0.3 \text{ V}$                                  | $V_{i(on)}$   | 0.5 | -  | 1.1 |            |
| Input resistor                                                                                       | $R_1$         | 7   | 10 | 13  | k $\Omega$ |

**AC Characteristics**


|                                                                                                |          |   |     |   |     |
|------------------------------------------------------------------------------------------------|----------|---|-----|---|-----|
| Transition frequency<br>$I_C = 10 \text{ mA}$ , $V_{CE} = 5 \text{ V}$ , $f = 100 \text{ MHz}$ | $f_T$    | - | 150 | - | MHz |
| Collector-base capacitance<br>$V_{CB} = 10 \text{ V}$ , $f = 1 \text{ MHz}$                    | $C_{cb}$ | - | 1.2 | - | pF  |

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

<sup>2)</sup>Pulse test:  $t < 300 \mu\text{s}$ ;  $D < 2\%$


**DC current gain  $h_{FE} = f(I_C)$**

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

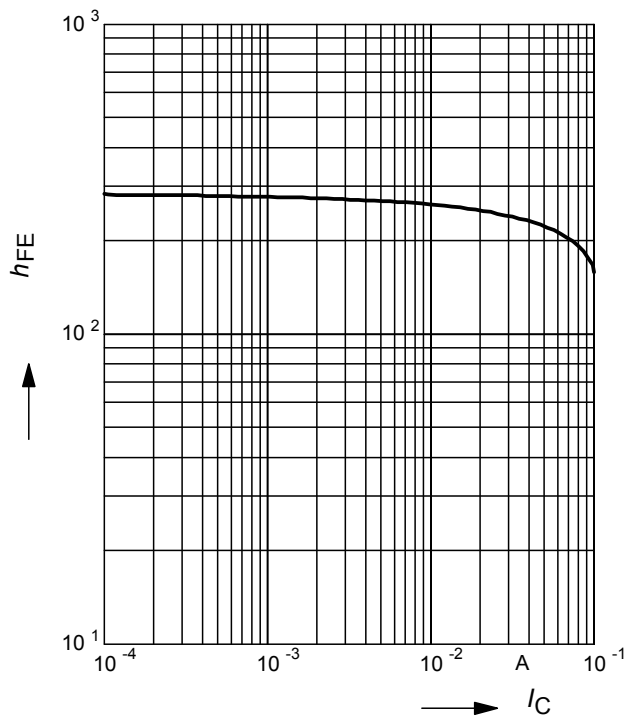


**Collector-emitter saturation voltage**

$V_{CEsat} = f(I_C), h_{FE} = 20$

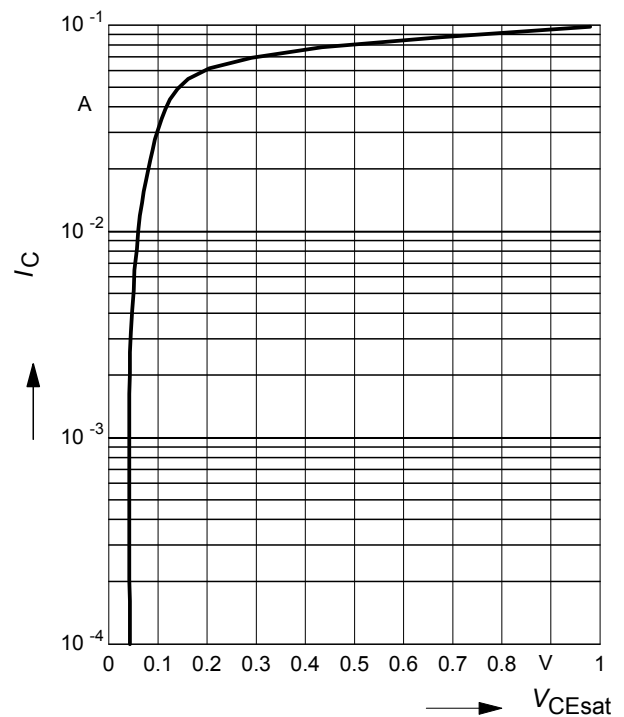


**Input on Voltage  $V_{i(on)} = f(I_C)$**

$V_{CE} = 0.3 \text{ V}$  (common emitter configuration)

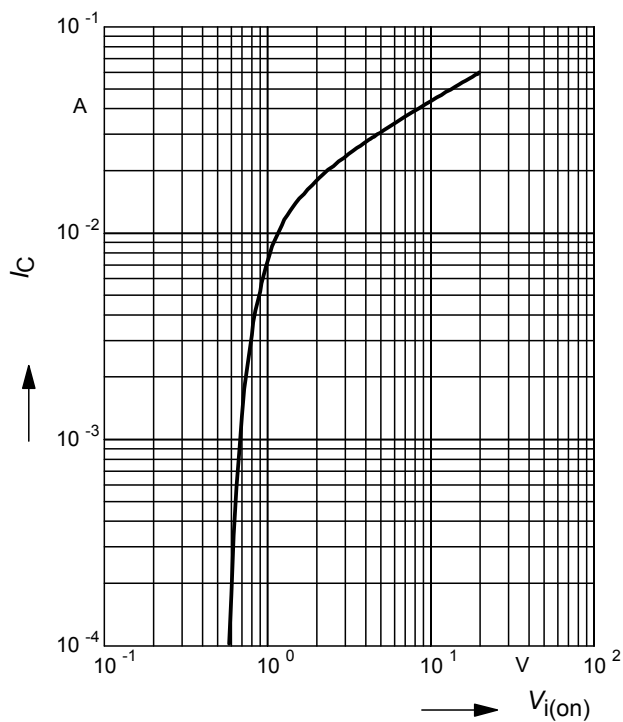


**Input off voltage  $V_{i(off)} = f(I_C)$**

$V_{CE} = 5 \text{ V}$  (common emitter configuration)

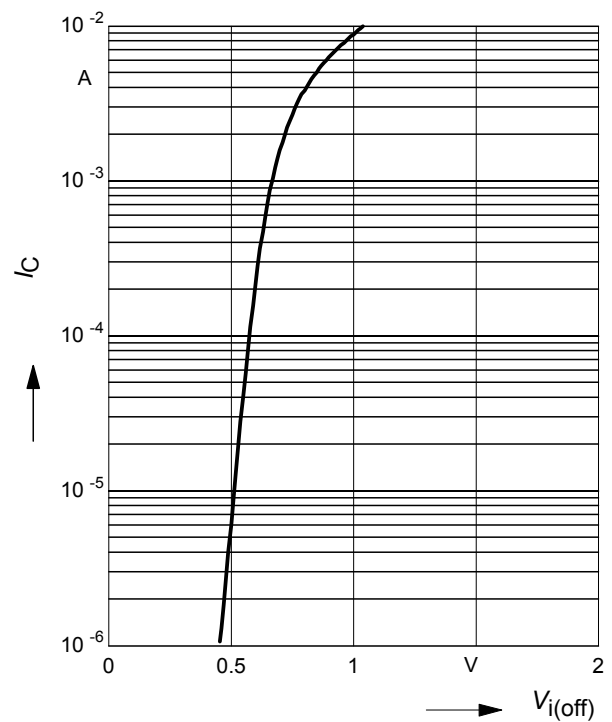


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR179F

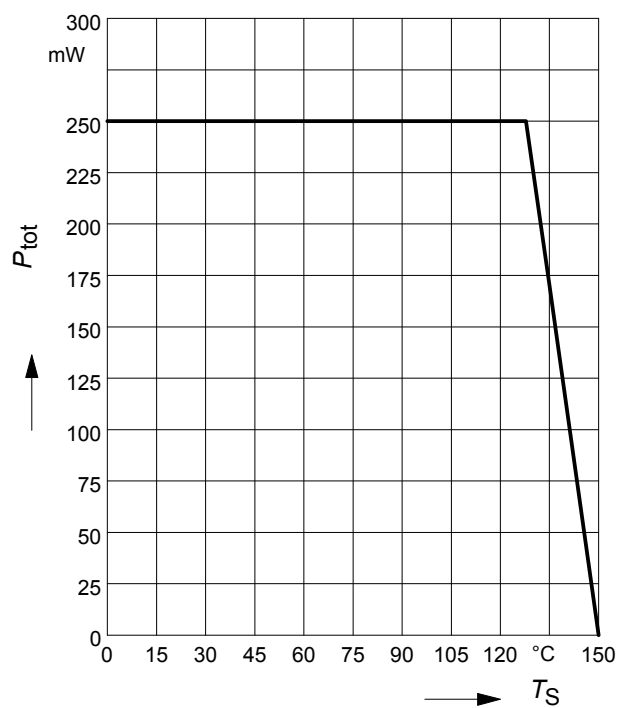


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR179L3

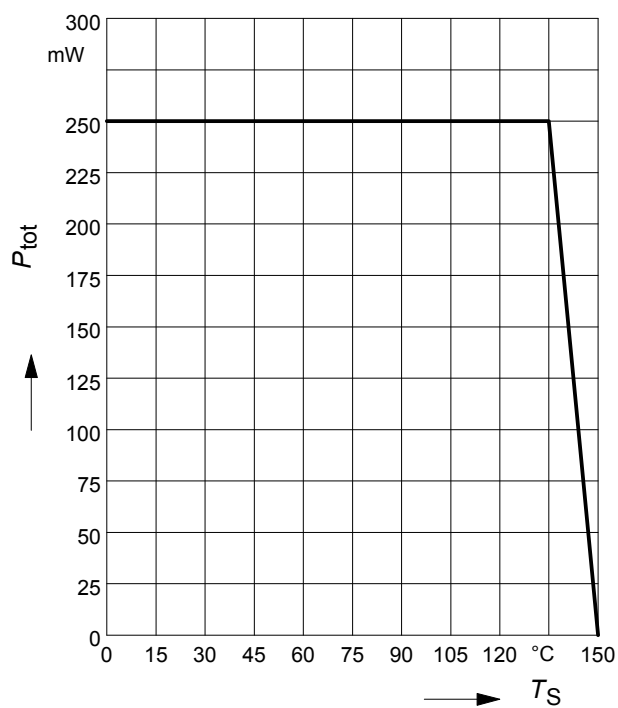


**Total power dissipation  $P_{\text{tot}} = f(T_S)$**

BCR179T

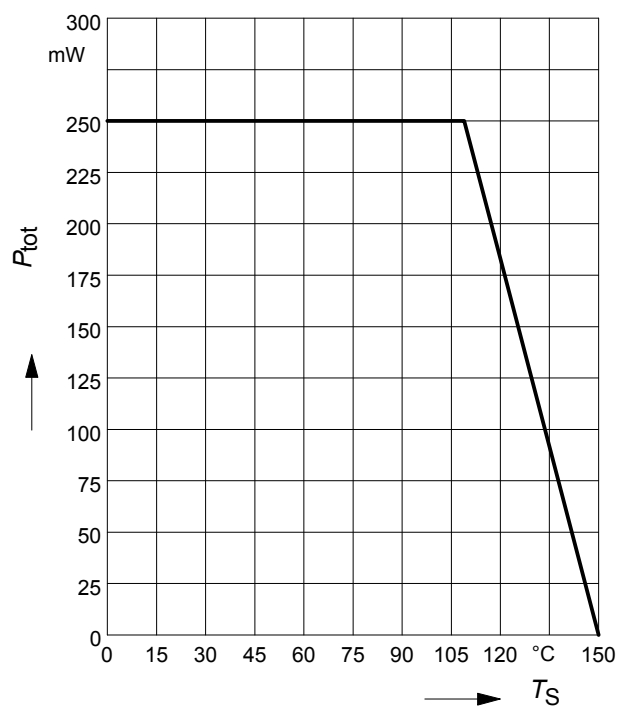

### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR179F

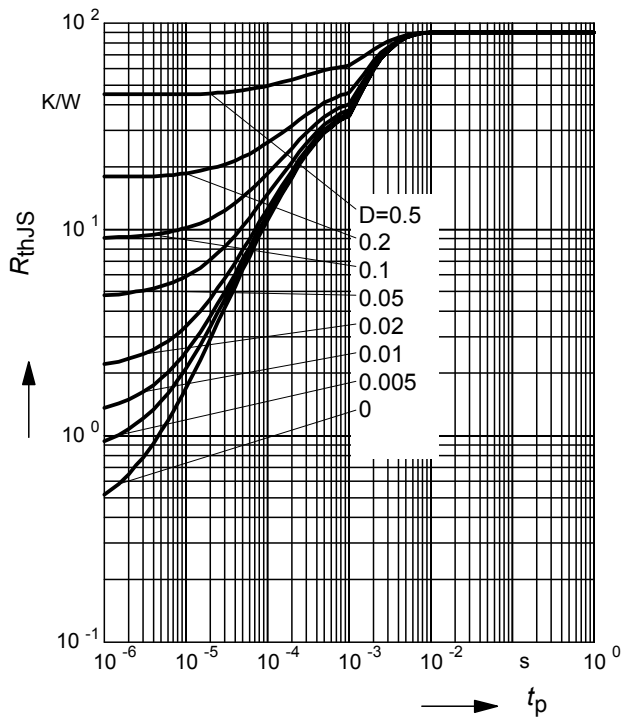

### Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR179F

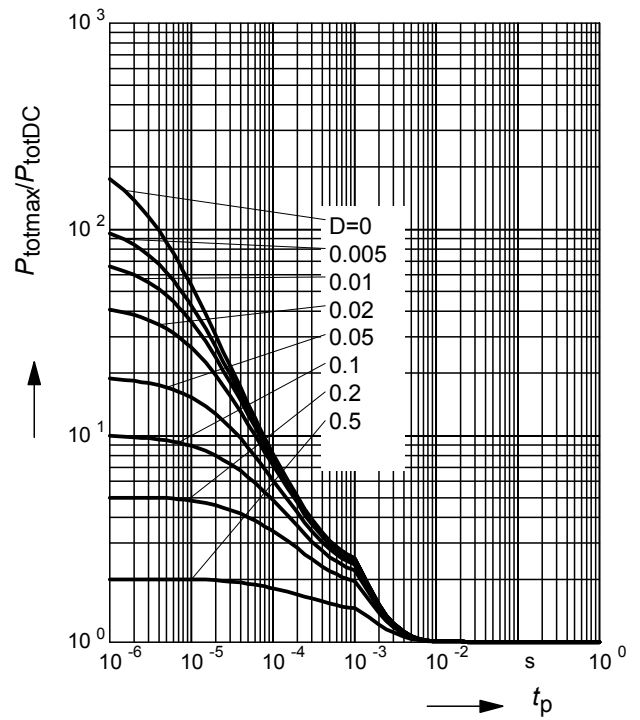

### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR179L3

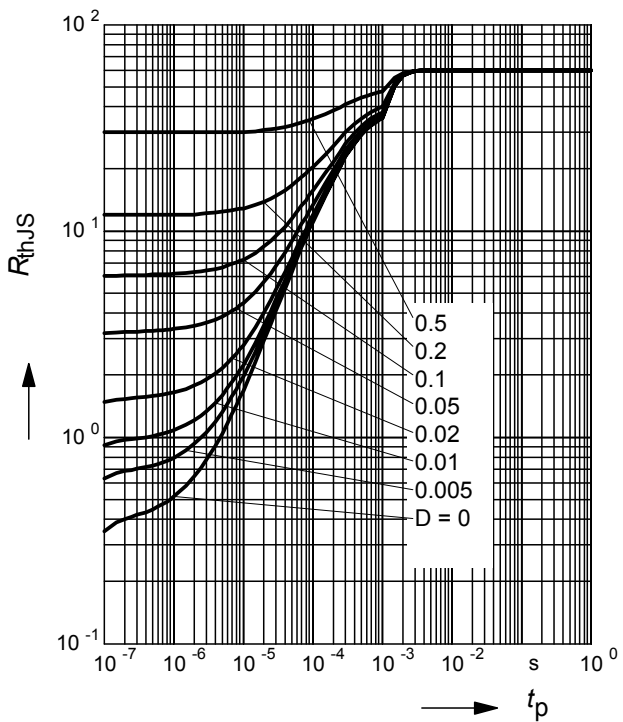

### Permissible Pulse Load


$$P_{totmax}/P_{totDC} = f(t_p)$$

BCR179L3

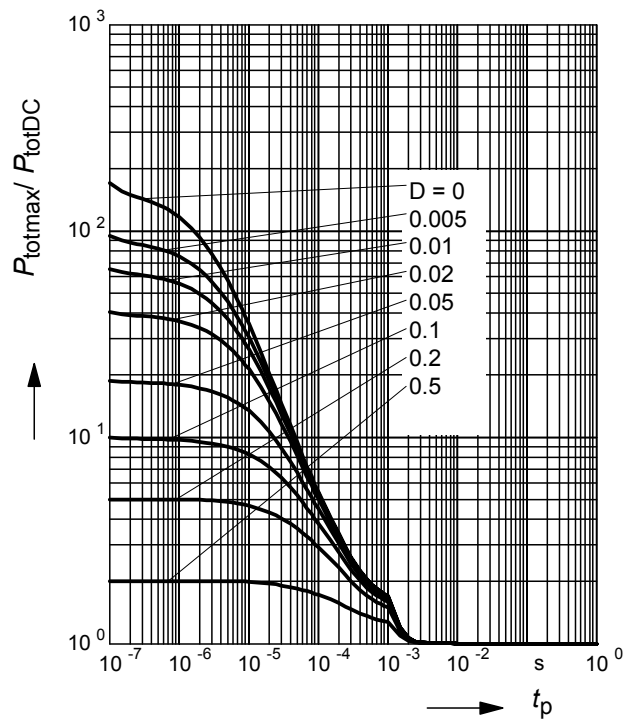

### Permissible Puls Load $R_{thJS} = f(t_p)$


BCR179T

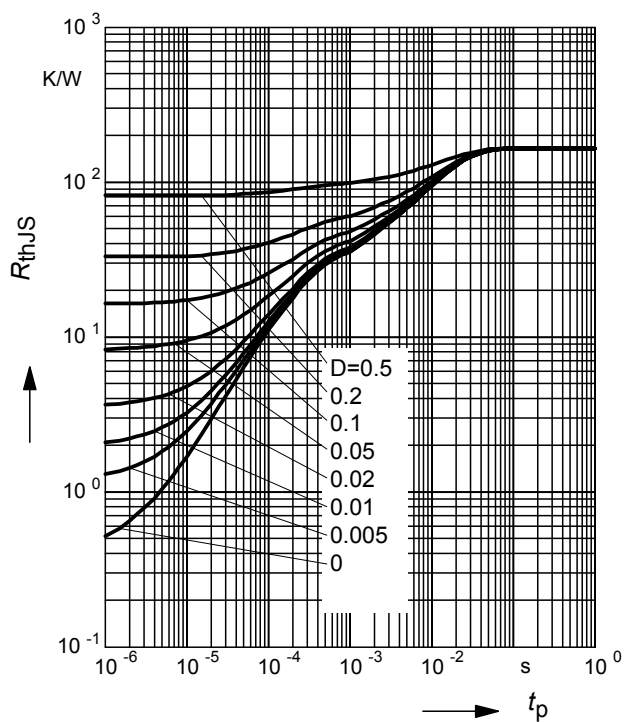


### Permissible Pulse Load

$$P_{totmax}/P_{totDC} = f(t_p)$$


BCR179T

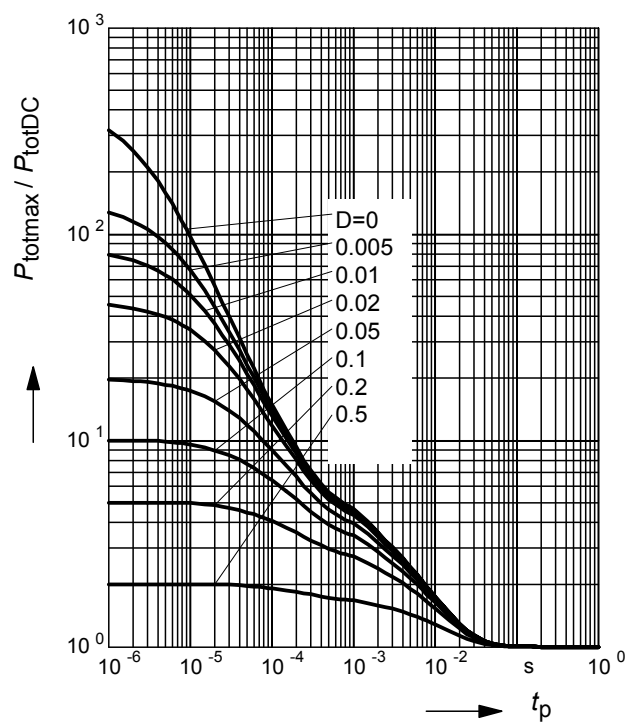


## Package Outline

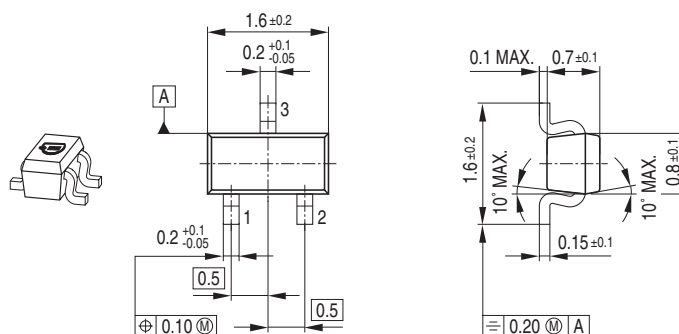

## Foot Print




## Marking Layout (Example)

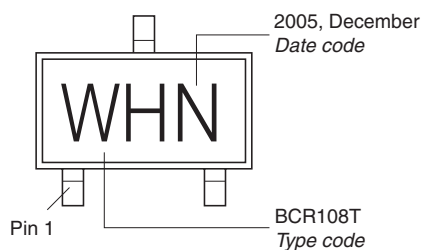

## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
Reel ø330 mm = 10.000 Pieces/Reel

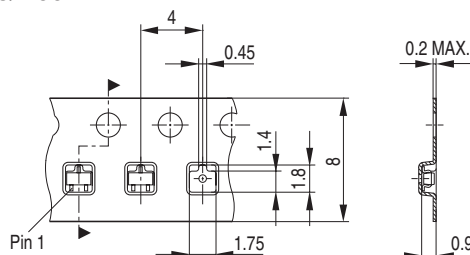


Date Code marking for discrete packages with one digit (SCD80, SC79, SC75<sup>1)</sup>) CES-Code

| Month | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 |
|-------|------|------|------|------|------|------|------|------|------|------|------|------|
| 01    | a    | p    | A    | P    | a    | p    | A    | P    | a    | p    | A    | P    |
| 02    | b    | q    | B    | Q    | b    | q    | B    | Q    | b    | q    | B    | Q    |
| 03    | c    | r    | C    | R    | c    | r    | C    | R    | c    | r    | C    | R    |
| 04    | d    | s    | D    | S    | d    | s    | D    | S    | d    | s    | D    | S    |
| 05    | e    | t    | E    | T    | e    | t    | E    | T    | e    | t    | E    | T    |
| 06    | f    | u    | F    | U    | f    | u    | F    | U    | f    | u    | F    | U    |
| 07    | g    | v    | G    | V    | g    | v    | G    | V    | g    | v    | G    | V    |
| 08    | h    | x    | H    | X    | h    | x    | H    | X    | h    | x    | H    | X    |
| 09    | j    | y    | J    | Y    | j    | y    | J    | Y    | j    | y    | J    | Y    |
| 10    | k    | z    | K    | Z    | k    | z    | K    | Z    | k    | z    | K    | Z    |
| 11    | l    | 2    | L    | 4    | l    | 2    | L    | 4    | l    | 2    | L    | 4    |
| 12    | n    | 3    | N    | 5    | n    | 3    | N    | 5    | n    | 3    | N    | 5    |


1) New Marking Layout for SC75, implemented at October 2005.




## Package Outline

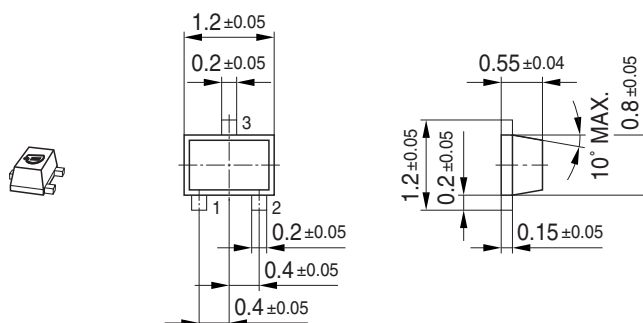

## Foot Print




## Marking Layout (Example)

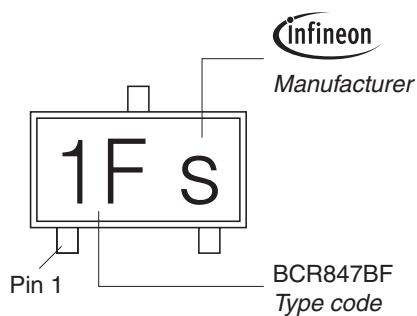


## Standard Packing

Reel ø180 mm = 3.000 Pieces/Reel  
 Reel ø330 mm = 10.000 Pieces/Reel

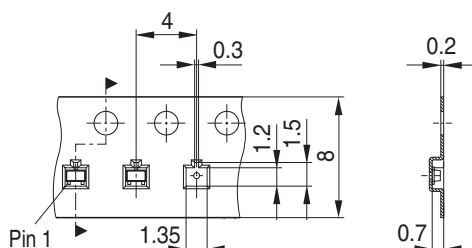


## Package Outline

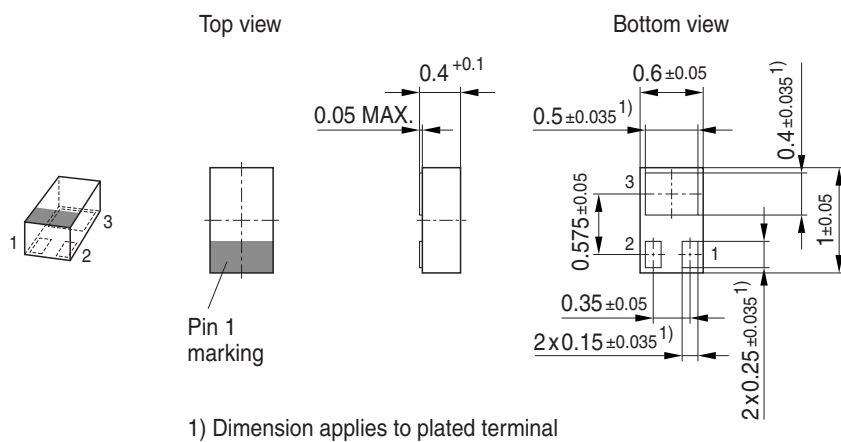


## Foot Print

For board assembly information please refer to Infineon website "Packages"

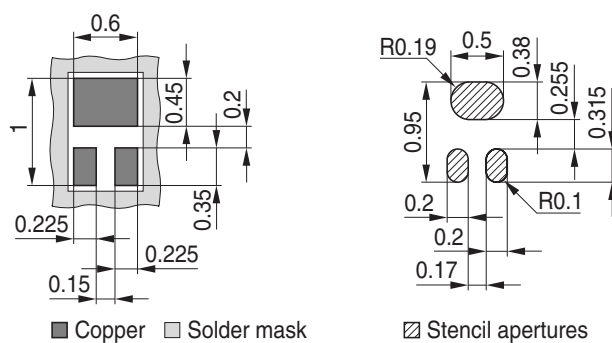


## Marking Layout

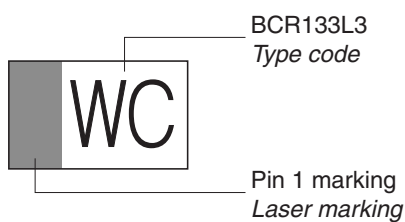

## Standard Packing

Reel ø180 mm = 15.000 Pieces/Reel

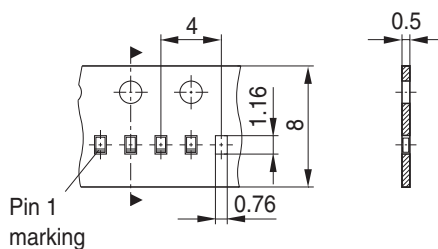

Edition 2006-02-01  
Published by  
Infineon Technologies AG  
81726 München, Germany  
© Infineon Technologies AG 2006.  
All Rights Reserved.

### **Attention please!**

The information given in this dokument shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

### **Information**

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office ([www.infineon.com](http://www.infineon.com)).

### **Warnings**

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system.

Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.