



Looking for a rugged, fully sealed rocker switch?

Carling Technologies set the standard for performance, reliability and aesthetics with the widely successful, often imitated, but never duplicated, V-Series rocker switches. Building further upon that platform, Carling has once again raised the bar with the fully sealed W-Series. The W-Series traditional appearance features complete IP68 protection, even below the panel, where the critical connection is made from your wiring harness. When used in conjunction with the integrated connector, the totally submersible W-Series provides a seal for up to ten individual wires, assuring compatibility with even the most complex circuitry.


The W-Series also offers a wide variety of accoutrements including endless illumination options featuring dual level and multicolor LEDs, progressive and hazard warning circuits, ratings up to 10A 24V, choice of paddle, rocker, locking or laser etched actuators, hundreds of standard legend choices and the electrical performance and reliability that is the hallmark of Carling Technologies products.

Tri-Seal Design

Affords IP68 protection for the entire switch including terminals and connector

Connector with Twin Locking Tabs

Provides sealed water tight connections as well as simple removal using only your hands.

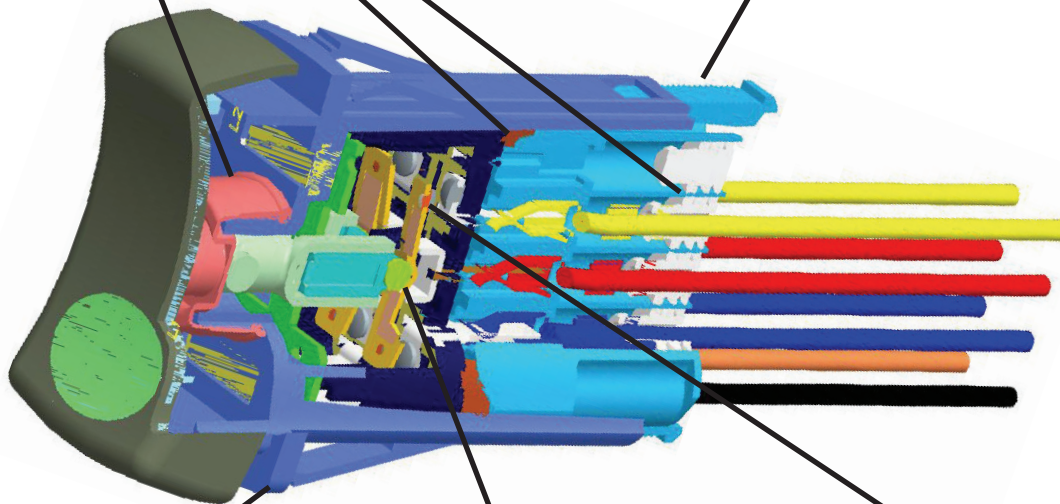

An Easy Retrofit

W-Series fits industry standard mounting hole 1.450 x .830

Functionality Under Extreme Conditions

Roller pin mechanism is lubricant free, withstanding temperatures from -40°C to +85°C.

Proven Switch Mechanism

Butt-Action contacts are available in a wide variety of circuitry and platings to accommodate most any application.

Electrical

Contact Rating	.4VA @ 24VDC 10 amps, 3-24VDC
Dielectric Strength	1500 Volts RMS
Insulation Resistance . . .	50 Megaohms
Initial Contact Resistance	10 milliohms max. @ 4 VDC
Life	100,000 cycles
Contacts	Silver tin-oxide, 88/12
Terminals	Copper with silver or gold plating. Quick Connect terminations.
Voltage	3-24 VDC
Overcurrent	15A for 50 cycles

Mechanical

Endurance	250,000 cycles minimum
---------------------	------------------------

Physical

Lighted	LED - rated 100,000 hours 1/2 life (LED is internally ballasted for volt- ages to 24 VDC)
Seals	Neoprene
Base	Polyester blend rated to 125C with a UL flammability rating of 94V0.
Actuator	Basic actuator structure molded of thermoplastic polycarbonate with a hard Nylon 66 thermoplastic surface overlay.
Lens	Polycarbonate rated at 100°C
Function	2 & 3 Position Rocker Style
Operation	Maintained & Momentary
Base	PA 6/6 30GF (glass filled)
Actuator	PA 6/6 13GF
Bracket	PBT 10GF
Connector	PBT 10GF, polarized

Environmental

Environmental	IP68, Fully sealed
Corrosion/ Chemical Splash.	Flowing Mixed Gas (FMG) Class III 3 year accelerated expo- sure per ASTM B-827, B-845
Operating Temperature . .	-40°C to +85°C, 22 cycles, 300 hours
Vibration 1	Per Mil-Std 202F, Method 204D Test Condition A 0.06 DA or 10G's 10-500 Hz.
Vibration 2	Resonance search 24-50 Hz 0.40 DA 50-2000 ±10 G's peak Results Horizontal Axis 3-5 G's max. Random 24 Hz 0.06 PSD-Gsq/Hz 60 Hz 0.50 100 Hz 0.50 200 Hz 0.025 2000 Hz 0.025
Handling/Drop	One meter onto concrete floor
Salt Spray	Per Mil-Std 202F, Method 101D, Test Condition A, 48 Hrs.
Dust	IP6X
Thermal Shock	Per Mil-Std 202F, Method 107F, Test Condition A, -55°C to 85°C. Test cri- teria - pre and post test contact resistance
Moisture Resistance/ Humidity	Per Mil-Std 202F, Method 106F, Test Criteria - pre and post test contact resistance


Actuator Travel (Angular Displacement)

24° full throw



Mounting Specifications

Panel Thickness Range .032 to .125


For optimum panel fit, the following panel thicknesses are suggested: .032, .062, .093, .125



Dimensional Specifications: in. [mm]

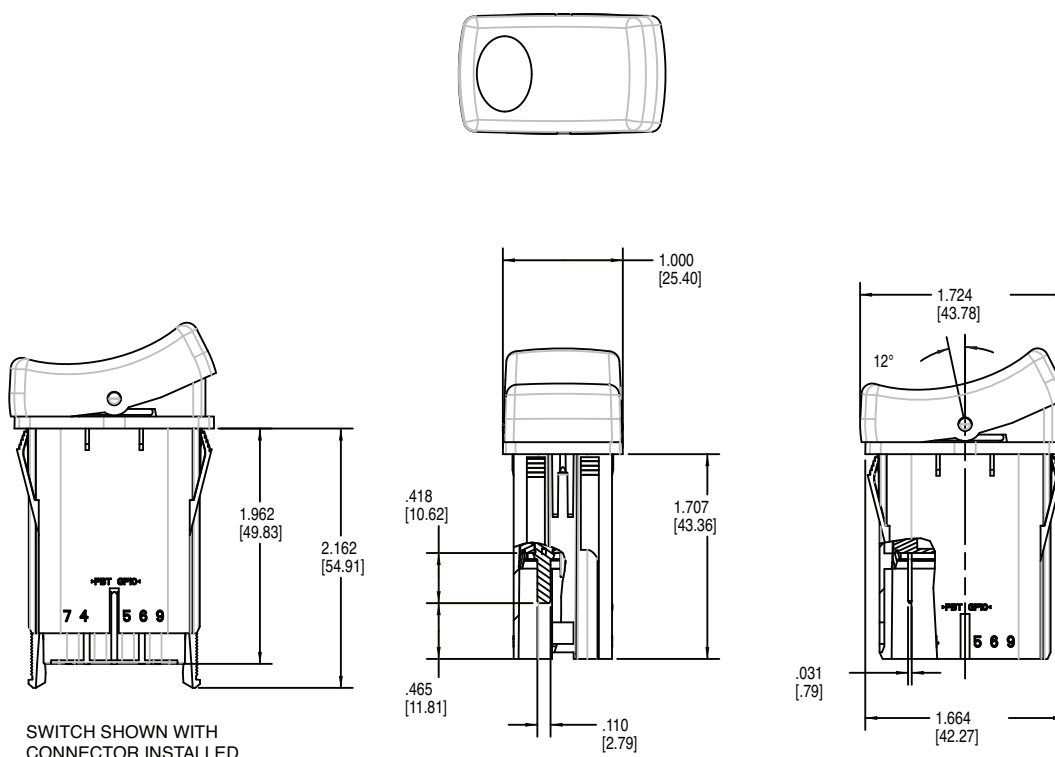

WCH CONNECTOR
(190-31214-001)



Notes:

WCH connector is intended for use with Tyco/Amp .110 Junior Power Timer, female contacts, and wire seals.

For 14-16 awg wire, specify Tyco/Amp P/N 927766-3

For 16-20 awg wire, specify Tyco/Amp P/N 927770-3

Tyco/Amp cable seal P/N 828904-1 (20-18 awg wire) or P/N 828905-1 (16-14 awg wire) is required for each individual wire lead, and Tyco/Amp cable plug, P/N 828922-1, is required to seal each unused connector opening. Consult Tyco/Amp for the cable seal recommended for your specific wire gauge and thickness.

W	11	D	2	B	C	0	1	-	A	7	Z	00	-	0	00
1 Series	2 Circuit	3 Rating	4 Termination	5 Illumination	6 Lamp	7 Lamp	8 Bracket		9 Actuator	10 Lens	11 Lens	12 Legend		13 Legend Orientation	14 Actuator Lens Legend

1 SERIES

W

2 CIRCUIT

Terminal Connections as viewed from bottom of switch:

() - momentary

8 terminal 10 terminal

8 - - 7 8 - - 7

1 - - 4 1 - - 4

2 - - 5 2 - - 5

3 - - 6 3 - - 6

10 - - 9

SP - single pole - uses terminals 1, 2 & 3.
DP - double pole uses terminals 1, 2, 3, 4, 5 & 6.
Terminals 7, 8, 9 & 10 for lamp circuit only.

Position:

SP	DP	2 & 3, 5 & 6	Connected Terminals	1 & 2, 4 & 5
11	21	ON	NONE	OFF
12	22	(ON)	NONE	OFF
13	23	ON	NONE	(OFF)
14	24	ON	NONE	ON
15	25	ON	NONE	(ON)
16	26	ON	OFF	ON
17	27	ON	OFF	(ON)
18	28	(ON)	OFF	(ON)
-	49	ON	ON	ON

3 RATING

B	10A 24V
D	10A 12V
G	10A 6V
H	10A 3V

4 TERMINATION/BASE STYLE

2 .110 TAB (QC)

5 ILLUMINATION & SWITCH SEALING

Lamp #1: above terminals 1 & 4 end of switch.; Lamp #2 above terminals 3 & 6 end of switch.

Positive (+) and negative (-) symbols apply to LED lamps only

Code	Lamps	Actuator Lens position when Illuminated	Lamp wired to Terminals
0	None		
A	# 1	Independent	8+ 7-
B	# 1	Down	3+ 7-
C	# 2	Up	3+ 7-
D	# 1	Down	3+ 7-
E	& # 2	Down	1+ 7-
F	# 1	Up	1+ 7-
G	& # 2	Up	3+ 7-
H	# 1	Independent	8+ 7-
I	& # 2	Up	3+ 7-
J	# 1	Down	3+ 8-
K	& # 2	Independent	6+ 7-
L	# 1	Independent	8+ 7-
M	# 2	Up	3+ 6-
N	# 1	Down	3+ 6-
P	# 1	Down	1+ 4-
R	# 1	Up	1+ 4-
S	# 1	Up	3+ 6-
T	# 1	Down	3+ 7-
U	# 1	Down	6+ 7-
V	# 1	Independent	8+ 7-
W	# 1	Independent	8+ 7-
X	# 1	Independent	10+ 9-
Y	# 1	Independent	10+ 9-
Z	# 1 & 2	Independent in Series	8+ 7-
	# 1 & 2	Independent in Parallel	8+ 7-

6,7 LAMP (same coding for both selections)

Selection 6: above terminals 1 & 4; Selection 7: above terminals 3 & 6

No lamp **0**

LED*

	Red	Amber	superbright Green	White
2VDC	A	L	F	4
6VDC	B	M	G	5
12VDC	C	N	H	6
24VDC	D	P	J	8

* Consult factory for "daylight bright" LED options. Typical current draw for LED is 20ma.

8 BRACKET COLOR¹

1 Black

9 ACTUATOR^{1,3}

3 Black with Laser Etch
A Black

10 LENS - above lamp #1 terminals 1,4

11 LENS - above lamp #2 terminals 3,6

Lens color for LEDs must be clear, white, or match color of LED.

0 - No Actuator			Z - No Lens			Blue	Lens Style
Clear	White	Amber	Green	Red			
1	—	B	G	M	T	Transparent Large	
—	7	C	H	N	U	Translucent Large	
3	—	D	J	P	V	Transparent Bar	
—	9	E	K	R	W	Translucent Bar	
5	A	—	—	—	—	Laser Etch	
(Background Color)							

12 ACTUATOR LENS OR BODY LEGEND²

00 - No Legend this location/No actuator

11 ON	12 OFF	13 I	14 O
OFF	ON	O	I
15 O	16 O	17 O	18 I
F N	N F	F	I
21 OFF	22 ON	23 O	24 I
25 O	26 O	27 O	28 I
F F	N N		

For additional legend options & codes, see pages 54-65 of this catalog

13 LEGEND ORIENTATION


0 No legend (used with codes 11-18 in selection 12)

1 Orientation 1

2 Orientation 2

3 Orientation 3

4 Orientation 4

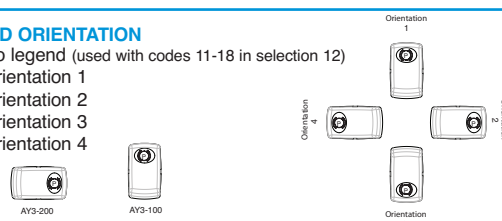

14 ACTUATOR LENS LEGEND²

00 No legend this location/no actuator (used with codes 11-18 in selection 12)

Selection 14 required when switch requires two legends. If the two legends consist of one lens & one body legend, lens legend must be specified in selection 12; body legend specified in selection 14. For legend options & codes, see pages 54-65 of this catalog.

NOTES

- Custom colors are available. Consult factory.
- White imprinting is standard on black actuators; Black imprinting is standard on white, red & gray actuators; Custom colors are available, consult factory.
- Locking rocker version is also available, consult factory for details.