


- |    |                                                                                           |
|----|-------------------------------------------------------------------------------------------|
| 7  | UL/CSA DESIGNATION STAMPED IN THIS AREA.                                                  |
| 8  | CADMIUM PER QQ-P-416.                                                                     |
| 9  | BRIGHT TIN PER ASTM-B-545 OVER COPPER PER AMS2418.                                        |
| 10 | GROUNDING INDENTS ON FRONT SHELL NOT SHOWN ON DRAWING.                                    |
| 11 | BRIGHT TIN PER ASTM-B-545 .000400-.000550 THK OVER<br>COPPER PER AMS2418 .000050 MIN THK. |

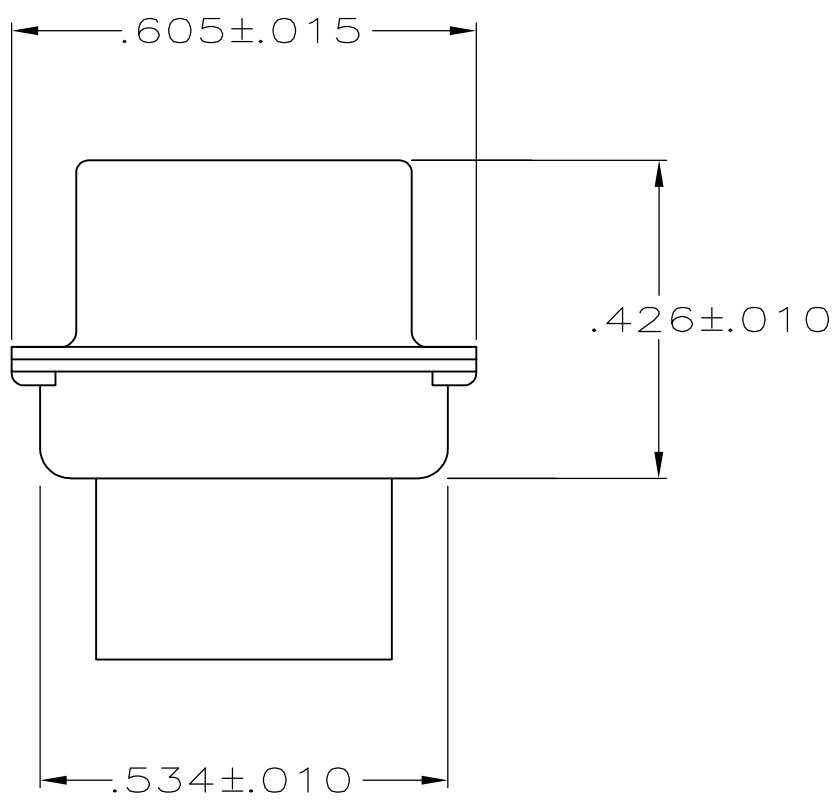

AMP 4805 REV 31MAR2000

12009 us016412 H:\docmod\204509\_1\_c.dwg