

RESISTANCE WELD THRU-HOLE CRYSTAL HC49S

FEATURES

- Low Cost
- Stocking Standard
- Fundamental to 50 MHz
- Resistance Weld

OPTIONS

- Tolerances to < 10 PPM
- Stabilities to < 5 PPM
- Temperatures to -40°C ~ +85°C
- 4 Pad HC49SPX (Alternate to FPX)
- 2.5mm Height Max (HC49SS)



DISCONTINUED


• STANDARD SPECIFICATIONS ¹		
PARAMETERS	MAX (unless otherwise noted)	
Frequency Range	3.200 ~ 70.000 MHz	
Frequency Tolerance: @ 25°C	±50 PPM	
Frequency Stability, ref @ 25°C Over Operating Temp Range	±50 PPM	
Temperature Range		
Operating (TOPR)	-20°C ~ +70°C	
Storage (TSTG)	-40°C ~ +85°C	
Shunt Capacitance (Co)	7.0 pF	
Load Capacitance (CL)	10 pF ~ Series (Customer Specified)	
Drive Level	0.5 mW	
Aging per year	±5 PPM	

¹ Other tolerances, stabilities & operating temperature ranges available. Consult Fox Customer Service for specific requirements.

² Crystal has a ±30ppm tolerance specification for all standard part numbers. These part numbers are listed in the Fox catalog on the Standard Crystal table.

All specifications subject to change without notice. Rev. 2/25/04

Frequency Range (MHz)	Operating Mode	Max ESR Ω
3.200 ~ 3.500	Fundamental	300
3.500+ ~ 4.000	Fundamental	200
4.000+ ~ 5.000	Fundamental	150
5.000+ ~ 6.000	Fundamental	120
6.000+ ~ 7.000	Fundamental	100
7.000+ ~ 9.000	Fundamental	80
9.000+ ~ 13.000	Fundamental	60
13.000+ ~ 20.000	Fundamental	40
20.000+ ~ 50.000	Fundamental	30
27.000 ~ 70.000	3rd OT	100

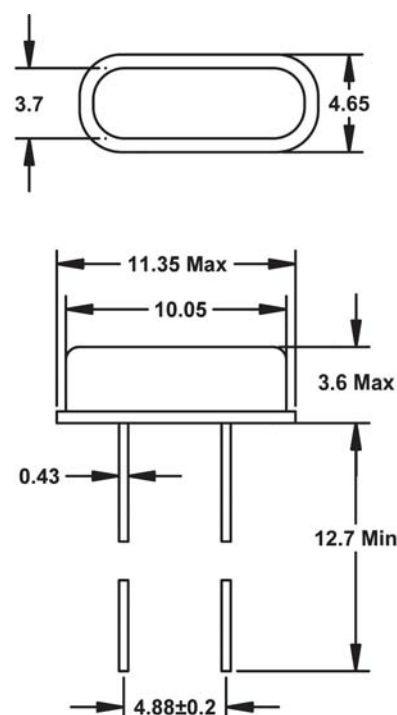

All dimensions are in millimeters.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Fox:

[FOXS/250F-20](#) [FOXS/098-20](#) [277-12-48](#) [FOXS/0443](#) [FOXS/100-20](#) [FOXS/073-20](#) [FOXS/115](#) [FOXS/120](#)
[FOXS/128](#) [FOXS/160](#) [FOXS/073](#) [FOXS/040](#) [FOXS/098](#) [FOXS/0496-20](#) [FOXS/040A](#) [FOXS/240F](#) [FOXS/0368-20](#)
[FOXS/147-20](#) [FOXS/240F-20](#) [FOXS/036S](#) [FOXS/0368S](#) [FOXS/080](#) [FOXS/049](#) [FOXS/041](#) [FOXS/221-20](#)
[FOXS/115-20](#) [FOXS/245F-20](#) [FOXS/049-20](#) [FOXS/081-20](#) [FOXS/200-20](#) [FOXS/184-20](#) [FOXS/160-20](#) [FOXS/147](#)
[FOXS/200](#) [FOXS/143](#) [FOXS/100](#) [FOXS/128-20](#) [FOXS/111-20](#) [FOXS/120-20](#) [FOXS/143-20](#) [FOXS/196-20](#)
[FOXS/080-20](#)