
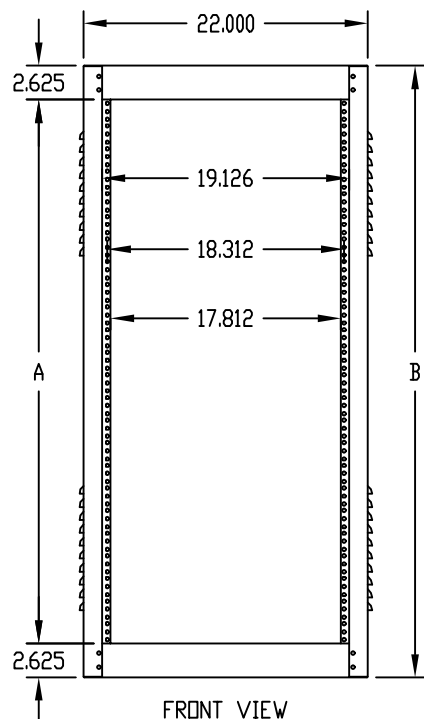


PART
NAME


LOW PRICED KNOCKDOWN CABINET RACK

PART
No.LPR-8212 thru LPR-8216, LPR-8222 thru LPR-8226,
LPR-8252 thru LPR-8256 AND LPR-8262 thru LPR-8266


TOP VIEW

FINISH:CABINET _____ SAND TEXTURE
_____ ROYAL BLUE TEXTUREMATERIAL:TOP, BOTTOM, RAIL SUPPORTS _____ 16 GA. STEEL
SIDES _____ 18 GA. STEEL


FRONT VIEW

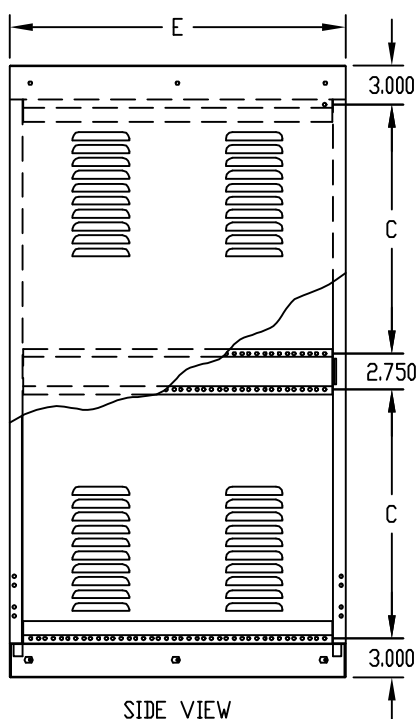

SIDE VIEW

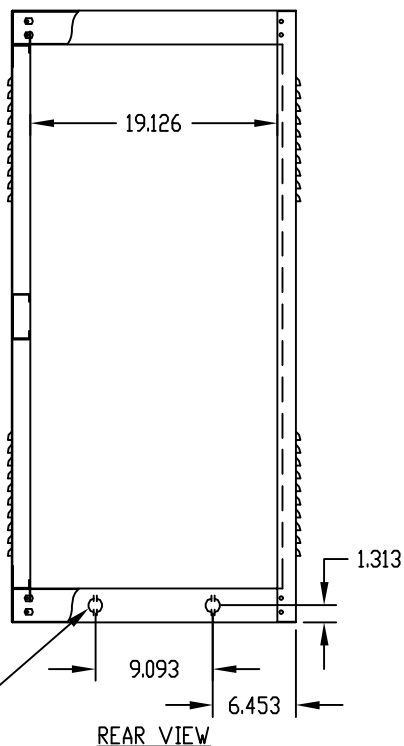

REAR VIEW



KNOCKOUT

BOTTOM VIEW

NOTES:

INTEGRAL PANEL MOUNTING RAILS ARE PIERCED 0.281
DIA. HOLES ON E.I.A. UNIVERSAL SPACING.
BOTTOM PIERCED FOR RC-7758 CASTERS OR RL-7770
LEVELER KIT.
CABINET RACKS SHIPPED UNASSEMBLED.
LOAD RATING: 700 LBS. MAX.

△ THIS CABINET HAS (40) LOUVERS PER SIDE.

○ THIS CABINET HAS (60) LOUVERS PER SIDE.

PART No. (NON-VENTILATED)	PART No. (VENTILATED)	A (PANEL SPACE)	B	C	D	E
LPR-8212	△ LPR-8252	42.000	47.312	19.281	24.000	26.000
LPR-8213	○ LPR-8253	52.500	57.812	24.531	24.000	26.000
LPR-8214	○ LPR-8254	61.250	66.562	28.906	24.000	26.000
LPR-8215	○ LPR-8255	70.000	75.312	33.281	24.000	26.000
LPR-8216	○ LPR-8256	78.750	84.062	37.656	24.000	26.000
LPR-8222	△ LPR-8262	42.000	47.312	19.281	29.250	31.250
LPR-8223	○ LPR-8263	52.500	57.812	24.531	29.250	31.250
LPR-8224	○ LPR-8264	61.250	66.562	28.906	29.250	31.250
LPR-8225	○ LPR-8265	70.000	75.312	33.281	29.250	31.250
LPR-8226	○ LPR-8266	78.750	84.062	37.656	29.250	31.250

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bud Industries:

<u>LPR-8212-RB</u>	<u>LPR-8212-S</u>	<u>LPR-8213-RB</u>	<u>LPR-8213-S</u>	<u>LPR-8214-RB</u>	<u>LPR-8214-S</u>	<u>LPR-8215-RB</u>	<u>LPR-8215-S</u>
<u>LPR-8216-RB</u>	<u>LPR-8216-S</u>	<u>LPR-8222-RB</u>	<u>LPR-8222-S</u>	<u>LPR-8223-RB</u>	<u>LPR-8223-S</u>	<u>LPR-8224-RB</u>	<u>LPR-8224-S</u>
<u>LPR-8225-RB</u>	<u>LPR-8225-S</u>	<u>LPR-8226-RB</u>	<u>LPR-8226-S</u>	<u>LPR-8252-RB</u>	<u>LPR-8252-S</u>	<u>LPR-8253-RB</u>	<u>LPR-8253-S</u>
<u>LPR-8254-RB</u>	<u>LPR-8254-S</u>	<u>LPR-8255-RB</u>	<u>LPR-8255-S</u>	<u>LPR-8256-RB</u>	<u>LPR-8256-S</u>	<u>LPR-8262-RB</u>	<u>LPR-8262-S</u>
<u>LPR-8263-RB</u>	<u>LPR-8263-S</u>	<u>LPR-8264-RB</u>	<u>LPR-8264-S</u>	<u>LPR-8265-RB</u>	<u>LPR-8265-S</u>	<u>LPR-8266-RB</u>	<u>LPR-8266-S</u>