



Commercial CCR-58

Multi-Throw DC-26.5GHz

Normally Open

The CCR-58 Switch is a broadband, multi-throw, electromechanical coaxial switch designed to switch a microwave signal from a common input to any of 3, 4, 5, or 6 outputs. The characteristic impedance is 50 Ohms. The switches are small using the popular connector spacing on a 1.062" dia. circle. Each position has an individual actuator mechanism allowing random position selection. This also gives the minimum switching time.

Specifications

RF Contacts: Break before make

Actuator	Voltage (VDC) 20°C	12	15	28
	Current (mA)	170	136	140

Switching Time: 15 msec max

Connectors: SMA (f)

Weight: 6 oz. max

Temperature Range: -40°C to +65°C (Operating)

Shock: MIL-STD-202 Method 213, Condition D (500G Non Operating)


Vibration: MIL-STD-202 Method 214, Condition D (10G RMS Non Operating)

Humidity: Moisture Seal Available

MTBF: 6.5 Million Hours (MIL-HDBK-217F Fixed, 25°C, <1 Cycle per hour)

With the normally open actuator, all paths are open when the switch is de-energized.



RF Power Handling

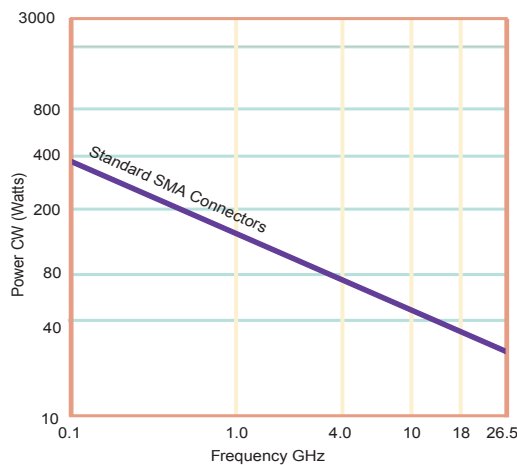

Specifications

	DC-6 GHz	6-12 GHz	12-18 GHz	18-26.5 GHz
VSWR (max)	1.25:1	1.40:1	1.50:1	1.80:1
Insertion Loss (min)	0.20 dB	0.40 dB	0.50 dB	0.80 dB
Isolation (max)	70.0 dB	60.0 dB	60.0 dB	50.0 dB

Typical Performance

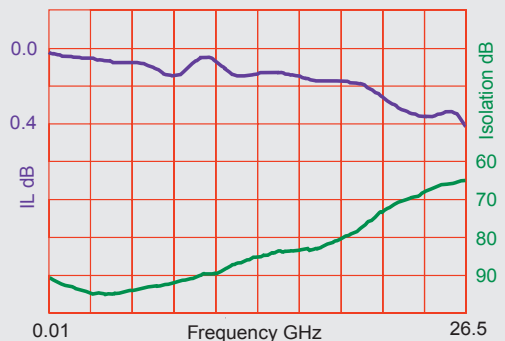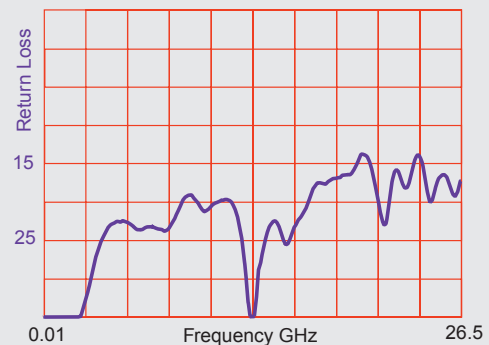

Specifications subject to change without notice.

www.teledynecoax.com
email: coax@teledyne.com


Tel: (800) 351-7368

10/2007


Commercial CCR-58

Multi-Throw DC-26.5GHz


Normally Open

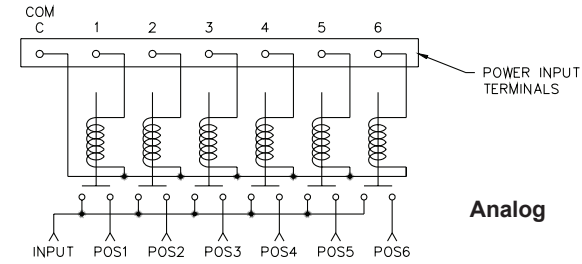



Analog

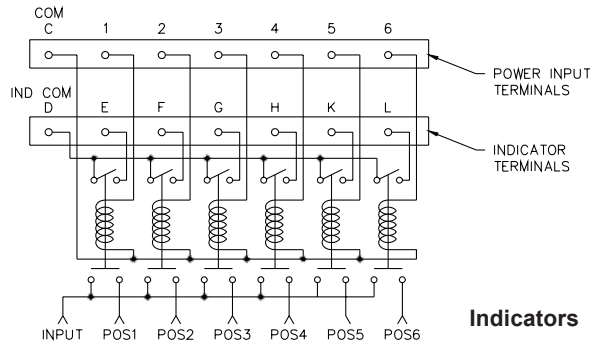

Indicators

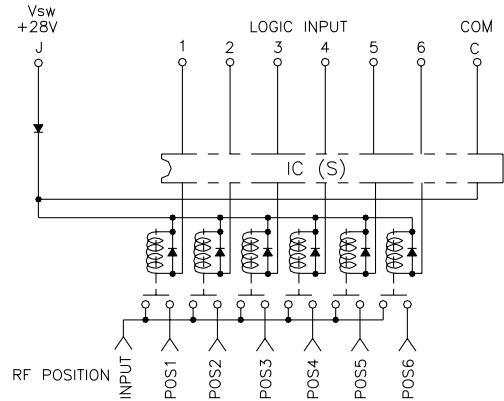

TTL

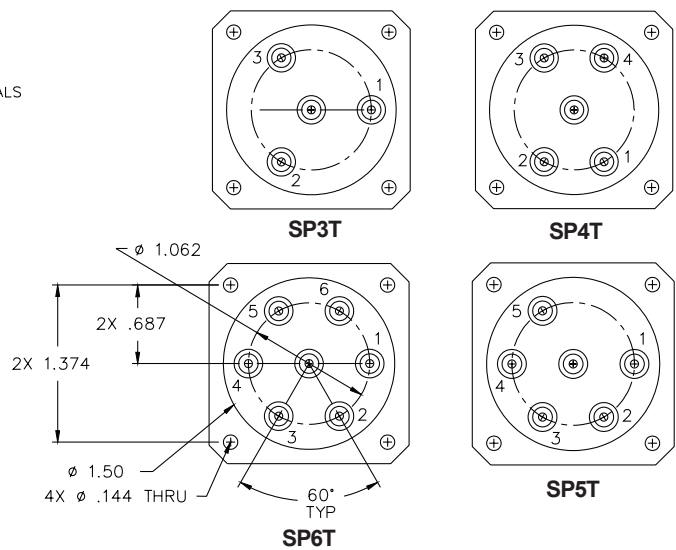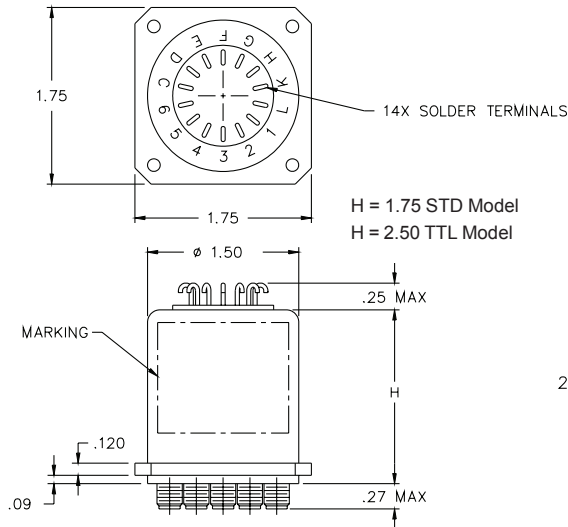

Part Numbering System for CCR-58 (Normally Open)

CCR-58 S 1 5 O - T

Series _____ Options _____
 Connectors _____ Actuator Type _____
 Actuator Voltage _____ Number of Switch Positions _____

Connector

S: SMA Female #

Actuator Voltage

1: 28Vdc Normally Open #
 2: 15Vdc Normally Open #
 3: 12Vdc Normally Open #

Number of Positions

3: SP3T #
 4: SP4T #
 5: SP5T #
 6: SP6T #

Actuator Type

O: No Indicator Contacts #
 C: Indicator Contacts #

Options

T: TTL Drivers with Diodes
 R: Positive + Common
 TD: TTL Driver with Decoder

For other options contact Factory

#: Stock item subject to prior sale



Specifications subject to change without notice.

www.teledynecoax.com
 email: coax@teledyne.com

Tel: (800) 351-7368

10/2007