BE550G

Support

Your Business

Company

You are here: Home > Products > Uninterruptible Power Supply (UPS) > Back-UPS

Product Category

Computer and Peripheral

Solutions

- > Back-UPS
- > Back-UPS ES
- > Back-UPS Pro
- > APC ES
- > APC RS
- Home UPS (2)
- Data Center and Facility 3 Phase

Network and Server (3)

UPS Management (7)



Back-UPS APC Back-UPS 550

Products and Services



APC Back-UPS, 330 Watts / 550 VA, Input 120V / Output 120V , Interface Port USB

Includes: CD with software, USB cable, User Manual

Read all reviews | Write a review


Share this Product: 💶 🔐 📷



More Images

Email Technical Specifications 📥 Printer Friendly Standard Lead Time: Usually in Stock Average Customer Review *** ** * 4.6 4.9 94 of 101 (93%) customers would recommend this product to a friend.

echnical Specifications	Product Overvie	w Documentation	Software & Firmware	Options	Ratings and Reviews	
Output						
Output Power Capacity	, 3:	30 Watts / 550 VA				
Max Configurable Power		30 Watts / 550 VA				
Nominal Output Voltage		120V				
Output Frequency (sync to mains)		7 - 63 Hz				
Waveform Type		Stepped approximation to a sinewave				
Output Connections		4) NEMA 5-15R (Ba	ittery Backup)			
	(-	4) NEMA 5-15R (Su	irge Protection)			l)
Input						
Nominal Input Voltage	1:	20∨				
Input Frequency	5	0/60 Hz +/- 3 Hz (a	uto sensing)			
Input Connections	١	IEMA 5-15P				
Cord Length		52 meters				
Input voltage range for operations	main 8	3 - 139∨				
Batteries & Runtime						
	N	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof			oof	
Battery Type	IV					
		4 hour(s)				
Battery Type	2-	4 hour(s) PCRBC110				
Battery Type Typical recharge time	2-					

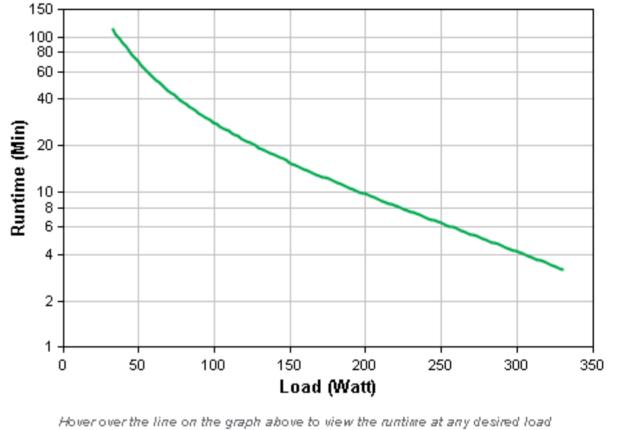

This graph is based on actual measured runtime data. All measurements were taken with new,

fully charged batteries and a balanced resistive load (PF = 1.0). Actual runtimes may vary from the values of this graph. Actual runtimes are dependent on several variables including battery age, battery charge level, environmental conditions and characteristics of the connected load. View Enlarged Graph View Runtime Chart

Load Efficiency

Energy Use/Efficiency

25%	96.1%
50%	97.5%
75%	97.8%
100%	97.7%

Audible noise at 1 meter from surface45.00 dBA

16.00 BTU/hr

3 years repair or replace

RoHS,REACH: Contains No SVHCs

of unit


Conformance

Regulatory Approvals

Standard Warranty

Online Thermal Dissipation

Environmental Compliance

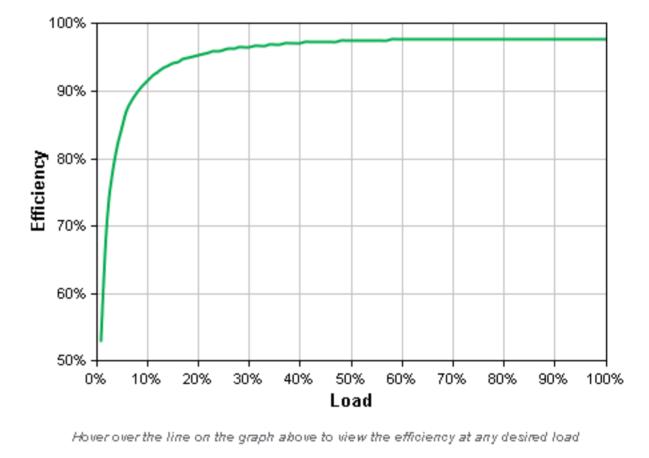

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF

= 1.0) output. View Enlarged Graph

Communications & Manageme	ent			
Interface Port(s)	USB			
Control panel	LED status display with On Line : On Battery : Replace Battery and Building Wiring Fault			
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm			
Surge Protection and Filtering				
Surge energy rating	340 Joules			
Filtering	Full time multi-pole noise filtering : 5% IEEE surge let-through : zero clamping response time : meets UL 1449			
Data Line Protection	Analog phone line for phone/fax/modem/DSL (RJ-11 connector)			
Physical				
Maximum Height	88.00 mm			
Maximum Width	180.00 mm			
Maximum Depth	302.00 mm			
Net Weight	5.50 KG			
Shipping Weight	6.20 KG			
Shipping Height	128.00 mm			
Shipping Width	235.00 mm			
Shipping Depth	393.00 mm			
Master Carton Units	2.00			
Master Carton Weight	13.00 KG			
Color	Black			
SCC Codes	1073130425894 7			
Units per Pallet	100.00			
# of Layers per Pallet	5			
# of Units per Layer per Pallet	20			
Pallet Weight	681.82 KG			
Environmental				
Operating Environment	0 - 40 °C			
Operating Relative Humidity	5 - 95%			
Operating Elevation	0-3000 meters			
Storage Temperature	-15 - 45 °C			
Storage Relative Humidity	5 - 95%			
Storage Elevation	0-15000 meters			

FCC Part 15 Class B,FCC Part 68,NOM,TUV-C,UL 1778,UL 497A,UL 497B